

LIGHT SOURCE

LED quantity	3
Power max	3 W
Total lumen output (3000K)	324 lm
Efficacy lm/W (3000K)	108 lm/W
LOR (3000K)	75%
CRI	>80 - >90
LED Temperature (K)	2700-3000-4000-5000
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	15°-30°-60°-Elliptical lens
Beam direction	Adjustable +/-70°, Rotating +/-355°
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum
Finish	Aluminum Hard Coat Anodizing(Black, Grey), Painted (White)
Available finishes	Black, Grey, White
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	-


ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection in	In series at 350mA
Class	III

MECHANICAL FEATURES

Dimensions (mm)	Ø60 x 27
Weight	90 gr
Mounting	Wall, Ceiling recessed
Cut-out (mm)	Ø52
Use	Indoor


NOTES

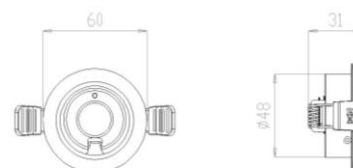

ACROBAT WITH SPRINGS



ACROBAT WITH FLAT LAMINATED SPRINGS

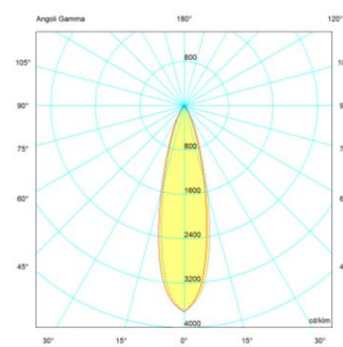

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
15°			
1.00	0.46	1201	751
2.00	0.92	300	188
3.00	1.39	133	83
4.00	1.85	75	47
5.00	2.31	48	30