

LIGHT SOURCE

LED quantity	14
Power max	2 W
Total lumen output (3000K)	47 lm
Efficacy lm/W (3000K)	24 lm/W
LOR (3000K)	-
CRI	>80 - >90
LED Temperature (K)	2200K, 2500K, 2700K CRI>90, 3000K CRI>90, 3500K CRI>90, 4000K CRI>90
Average operational life	50.000 hours

OPTIC

Material	PC
Available optics	Diffused emission
Beam direction	Fixed
Flux symmetry	Asymmetric
Accessories	-

LED FIXTURE

Material	Aluminum
Finish	Painted (White, Black, Corten, Anthracite Grey, Oyster White)
Available finishes	White, Black, Corten, Anthracite Grey, Oyster White
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	-

ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection	In parallel at 24Vdc
Class	III

MECHANICAL FEATURES



Dimensions (mm)	80 x 80 x 29
Weight	110 gr
Mounting	Wall
Cut-out (mm)	Flush-mounting box 502E (H 71 x W 70,8 x D 52,7)
Use	Indoor

NOTES

Recessed-box for cement/brickwork included 502E



design by Valerio Sommella & Anonima Luci

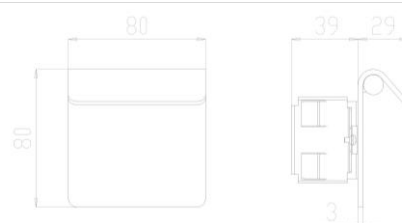

2W