

DGA

23-24


Novelties

ILLUMINAZIONE D'ALTA QUALITÀ PER VETRINE FINE JEWELLERY LIGHTING

**ARIA 1**


Ø 9

1W - 2W

**ARIA 2**

Ø 9

2 x 1W - 2 x 2W

**ARIA 3**

Ø 9

3 x 1W - 3 x 2W

INCASSI A MOLLE E A FILO (9W - 18W) TRIM - TRIMLESS DOWNLIGHTS

**ARIEL Am**

Ø 60

9W - 13W

**ARIEL AF**

Ø 40

9W - 13W

**ARIEL mR**

Ø 80

9W - 13W

**ARIEL RF**

Ø 120

9W - 13W

**ARIEL IN&OUT m**

Ø 40

9W - 13W

**ARIEL IN&OUT F**

Ø 40

9W - 13W

**SATURNO Am**

Ø 75

18W

**SATURNO AF**

Ø 55

18W

**SATURNO mR**

Ø 110

18W

**SATURNO RF**

Ø 150

18W

**SATURNO IN&OUT m**

Ø 55

18W

**SATURNO IN&OUT F**

Ø 55

18W

PROIETTORI (10W - 25W) PROJECTORS

**ARIEL B 48V**

Ø 40

10W - 14W

**ARIEL B 48V DALI**

Ø 40

10W - 14W DALI

**SATURNO B**

Ø 55

20W - 25W

**SATURNO B DALI**

Ø 55

20W - 25W DALI

**SATURNO BF**

Ø 55

20W - 25W

**SATURNO BF DALI**

Ø 55

20W - 25W DALI



INCASSI SOLOVETRO

SOLOVETRO SERIES



28

ARIEL i IP67
SOLOVETRO
Ø 59
9W



30

SATURNO i IP67
SOLOVETRO
Ø 80
12W



32

TRIUUM i IP67
SOLOVETRO
137x47
7W - 15W - 8W

INCASSI CON CASSAFORMA

RECESSED FIXTURES WITH HOUSING



34

ARIEL i IP67
Ø 63
9W



36

SATURNO i IP67
Ø 85
12W



33

TRIUUM i IP67
150x60
7W - 15W - 8W

SEGNAPASSO

STEP LIGHTS



38

LUI IP67
SOLOVETRO
35x35
1W - 2W



39

LEI IP67
SOLOVETRO
Ø 35

LINEARI

LINEAR FIXTURES



40

CONTINUUM i IP67
30-60-90-120-150x47
9W - 18W - 27W - 36W - 45W

PROIETTORI ORIENTABILI

ADJUSTABLE PROJECTORS



42

MILLI
Ø 20
2,5W



44

ARIEL P IP67
Ø 49
9W - 13W



46

SATURNO P IP67
Ø 62
12W - 18W




43

TRIUUM P IP67
150x60
7W - 15W - 8W

BINARI E ACCESSORI

TRACKS AND ACCESSORIES



50

BINARI 230Vac
230Vac TRACKS



54

BINARI 230Vac PER SATURNO BF
230Vac TRACKS FOR SATURNO BF



56

MICRO BINARI 48Vdc
48Vdc MICRO TRACKS

ALIMENTATORI

DRIVERS

DRIVERS 350mA	58
DRIVERS 500mA	63
DRIVERS 700mA	68
DRIVERS 24Vdc	72
DRIVERS 48Vdc	76

DGA








INDOOR 



DGA

ARIA

















-  IP40
-  Class III
-  Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting
-  Collegare in serie 350mA o 500mA
Connect in series at 350mA or 500mA
-  25 gr - 35 gr - 45 gr
-  Ø 11,5 mm
-  Altamente riciclabile
Highly recyclable

Massima flessibilità
Finiture preziose
Estrema compattezza













Maximum flexibility
Beautiful finishes
Extreme compactness


ARIA 1

Lumen Output 3000K CRI > 90	1W 350mA 50lm	2W 500mA 80lm	Finiture Finish	Colore LED LED Colour
 20° Lens	784475._ _	784476._ _	<ul style="list-style-type: none">  1 Cromo Lucido Shiny Chrome  3 Grigio - Gray  4 Nero - Black  I Oro Lucido Gold Chrome  Z Champagne Gold 	<ul style="list-style-type: none">  U 2200K  X 2700K CRI > 90  W 3000K CRI > 90  K 3500K CRI > 90  D 4000K CRI > 90
 30° Lens	764475._ _	764476._ _		
 50° Lens	7D4475._ _	7D4476._ _		







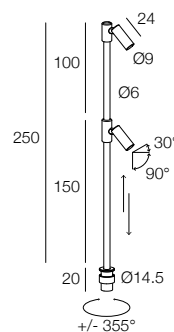








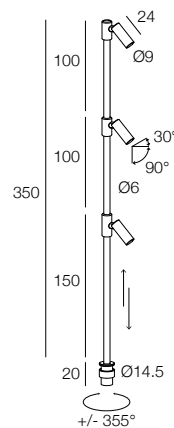
ARIA 2

Lumen Output 3000K CRI > 90	1W x 2 350mA 2 x 50lm	2W x 2 500mA 2 x 80lm	Finiture Finish	Colore LED LED Colour
 20° Lens	784477._ _	784478._ _	<ul style="list-style-type: none">  1 Cromo Lucido Shiny Chrome  3 Grigio - Gray  4 Nero - Black  I Oro Lucido Gold Chrome  Z Champagne Gold 	<ul style="list-style-type: none">  U 2200K  X 2700K CRI > 90  W 3000K CRI > 90  K 3500K CRI > 90  D 4000K CRI > 90
 30° Lens	764477._ _	764478._ _		
 50° Lens	7D4477._ _	7D4478._ _		



ARIA 3

Lumen Output 3000K CRI > 90	1W x 3 350mA 3 x 50lm	2W x 3 500mA 3 x 80lm	Finiture Finish	Colore LED LED Colour
 20° Lens	784479._ _	784480._ _	<ul style="list-style-type: none">  1 Cromo Lucido Shiny Chrome  3 Grigio - Gray  4 Nero - Black  I Oro Lucido Gold Chrome  Z Champagne Gold 	<ul style="list-style-type: none">  U 2200K  X 2700K CRI > 90  W 3000K CRI > 90  K 3500K CRI > 90  D 4000K CRI > 90
 30° Lens	764479._ _	764480._ _		
 50° Lens	7D4479._ _	7D4480._ _		










ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

350mA CC20-F-350-N pag. 58
500mA CC20-F-500-N pag. 63

EXAMPLE CODE COMPOSITION
123456.
LED COLOUR
FINISH

DGA

ARIEL Am

-  IP40
-  Class III
-  Incasso a parete, soffitto
Wall, ceiling recessed
-  Collegare in serie 500mA o 700mA
Connect in series at 500mA or 700mA
-  250 gr
-  Ø 54 mm
-  Altamente riciclabile
Highly recyclable




ARIEL Am

STRUTTURA FRAME A01232._0 Nell'ordine richiedere sempre 1 Struttura per ogni Ariel Am □ _ Vedi finiture modulo
MODULE FINISH Please specify always 1 Frame for each Ariel Am in the purchase order See module finish



MODULO - MODULE ARIEL Am	9W 500mA	13W 700mA	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	900lm	1100lm				
[1] 14° Lens	7Q4408._ _ _ _	7Q4409._ _ _ _	□ S RAL 9010 Warm white	■ U1 2200K CRI > 90	■ 1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
18° Lens	784408._ _ _ _	784409._ _ _ _	□ 7 RAL 9003 White	■ B2 2400K CRI > 90	■ I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
24° Lens	7G4408._ _ _ _	7G4409._ _ _ _	■ A6 RAL 9002 Gray white	■ X 2700K CRI > 90	■ 8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
33° Lens	7E4408._ _ _ _	7E4409._ _ _ _	■ C RAL 7033 Gothic Cement	■ X1 2700K CRI > 95	■ N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
52° Lens	754408._ _ _ _	754409._ _ _ _	■ G3 RAL 7012 Gray	■ 6 3000K CRI > 80	■ 4 Nero - Black	S Filtro Correttivo Softening Lens
			■ G7 RAL 7006 Beige gray	■ W 3000K CRI > 90		
			■ M8 RAL 8019 Brown	■ W1 3000K CRI > 95		
			■ H RAL 9005 Black	■ K 3500K CRI > 90		
				■ K1 3500K CRI > 95		
				■ D 4000K CRI > 90		

+

ACCESSORI INTERCambiabili
INTERCHANGEABLE ACCESSORIES


[1] Lente 14° non intercambiabile
14° Lens not interchangeable

Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Lente 18° 18° Lens A01192.80	 Filtro Ellittico Elliptical Filter A01182.80	 Cromo Lucido Shiny Chrome A01272.10	 Cromo Lucido Shiny Chrome A01190.10
 Lente 24° 24° Lens A01193.80	 Filtro Nido d'ape Hex Louver A01183.40	 Oro Lucido Gold Chrome A01272.10	 Oro Lucido Gold Chrome A01190.10
 Lente 33° 33° Lens A01194.80	 Filtro Prismatico Prismatic Filter A01184.80	 Oro Satinato Satin Gold A01272.80	 Oro Satinato Satin Gold A01190.80
 Lente 52° 52° Lens A01195.80	 Filtro Correttivo Softening Lens A01185.80	 Nichel Satinato Satin Nickel A01272.N0	 Nichel Satinato Satin Nickel A01190.N0
		 Nero Black A01272.40	 Nero Black A01190.40

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

500mA CC20-F-500-N pag. 63
700mA CC20-F-700-N pag. 68





EXAMPLE CODE COMPOSITION
123456.







DGA

ARIEL AF



-  IP40
-  Class III
-  Incasso a parete, soffitto
Wall, ceiling recessed
-  Installazione a filo
Trimless installation


-  Collegare in serie 500mA o 700mA
Connect in series at 500mA or 700mA
-  220 gr
-  Ø 50 mm
-  Altamente riciclabile
Highly recyclable


















ARIEL AF

STRUTTURA FRAME A00861.30 Nell'ordine richiedere sempre 1 Struttura per ogni Ariel AF
Please specify always 1 Frame for each Ariel AF in the purchase order



MODULO - MODULE ARIEL AF	9W 500mA	13W 700mA	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	900lm	1100lm				
[1] 14° Lens	7Q4408. _ _ _ _	7Q4409. _ _ _ _	<input type="checkbox"/> S RAL 9010 Warm white	<input type="checkbox"/> U1 2200K CRI > 90	<input type="checkbox"/> 1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
18° Lens	784408. _ _ _ _	784409. _ _ _ _	<input type="checkbox"/> 7 RAL 9003 White	<input type="checkbox"/> B2 2400K CRI > 90	<input type="checkbox"/> I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
24° Lens	7G4408. _ _ _ _	7G4409. _ _ _ _	<input type="checkbox"/> A6 RAL 9002 Gray white	<input type="checkbox"/> X 2700K CRI > 90	<input type="checkbox"/> 8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
33° Lens	7E4408. _ _ _ _	7E4409. _ _ _ _	<input type="checkbox"/> C RAL 7033 Gothic Cement	<input type="checkbox"/> X1 2700K CRI > 95	<input type="checkbox"/> N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
52° Lens	754408. _ _ _ _	754409. _ _ _ _	<input type="checkbox"/> G3 RAL 7012 Gray	<input type="checkbox"/> 6 3000K CRI > 80	<input type="checkbox"/> 4 Nero - Black	S Filtro Correttivo Softening Lens
			<input type="checkbox"/> G7 RAL 7006 Beige gray	<input type="checkbox"/> W 3000K CRI > 90		
			<input type="checkbox"/> M8 RAL 8019 Brown	<input type="checkbox"/> W1 3000K CRI > 95		
			<input type="checkbox"/> H RAL 9005 Black	<input type="checkbox"/> K 3500K CRI > 90		
				<input type="checkbox"/> K1 3500K CRI > 95		
				<input type="checkbox"/> D 4000K CRI > 90		



ACCESSORI INTERCambiabili INTERCHANGEABLE ACCESSORIES	Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
[1] Lente 14° non intercambiabile 14° Lens not interchangeable	 Lente 18° 18° Lens A01192.80	 Filtro Ellittico Elliptical Filter A01182.80	 Cromo Lucido Shiny Chrome A01272.10	 Cromo Lucido Shiny Chrome A01190.10
	 Lente 24° 24° Lens A01193.80	 Filtro Nido d'ape Hex Louver A01183.40	 Oro Lucido Gold Chrome A01272.10	 Oro Lucido Gold Chrome A01190.10
	 Lente 33° 33° Lens A01194.80	 Filtro Prismatico Prismatic Filter A01184.80	 Oro Satinato Satin Gold A01272.80	 Oro Satinato Satin Gold A01190.80
	 Lente 52° 52° Lens A01195.80	 Filtro Correttivo Softening Lens A01185.80	 Nichel Satinato Satin Nickel A01272.N0	 Nichel Satinato Satin Nickel A01190.N0
			 Nero Black A01272.40	 Nero Black A01190.40




ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

ACCESSORI
ACCESSORIES

500mA CC20-F-500-N pag. 63
700mA CC20-F-700-N pag. 68








Fresa a tazza
Hole saw
A00832.H0

EXAMPLE CODE COMPOSITION
123456.



DGA

ARIEL mR

-  IP40
-  Class III
-  Incasso a parete, soffitto
Wall, ceiling recessed
-  Collegare in serie 500mA o 700mA
Connect in series at 500mA or 700mA
-  480 gr
-  Ø 86 mm
-  Altamente riciclabile
Highly recyclable



ARIEL mR

STRUTTURA
FRAME

A01270...0

MODULE FINISH

Nell'ordine richiedere sempre 1 Struttura per ogni Ariel mR
Please specify always 1 Frame for each Ariel mR in the purchase order
 _ Vedi finiture modulo
See module finish
MODULO - MODULE
ARIEL mR9W
500mA13W
700mAFiniture modulo
Module finishesColore LED
LED ColourAnelli decorativi
Decorative ringsFiltri ottici
Optical filters

Lumen Output 3000K


900lm

1100lm

[1]

MODULO - MODULE ARIEL mR	9W 500mA	13W 700mA	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
14° Lens	7Q4425..._ _ _ _	7Q4426..._ _ _ _	<input type="checkbox"/> S RAL 9010 Warm white	<input type="checkbox"/> U1 2200K CRI > 90	<input type="checkbox"/> 1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
18° Lens	784425..._ _ _ _	784426..._ _ _ _	<input type="checkbox"/> 7 RAL 9003 White	<input type="checkbox"/> B2 2400K CRI > 90	<input type="checkbox"/> I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
24° Lens	7G4425..._ _ _ _	7G4426..._ _ _ _	<input type="checkbox"/> A6 RAL 9002 Gray white	<input type="checkbox"/> X 2700K CRI > 90	<input type="checkbox"/> 8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
33° Lens	7E4425..._ _ _ _	7E4426..._ _ _ _	<input type="checkbox"/> C RAL 7033 Gothic Cement	<input type="checkbox"/> X1 2700K CRI > 95	<input type="checkbox"/> N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
52° Lens	754425..._ _ _ _	754426..._ _ _ _	<input type="checkbox"/> G3 RAL 7012 Gray	<input type="checkbox"/> 6 3000K CRI > 80	<input type="checkbox"/> 4 Nero - Black	S Filtro Correttivo Softening Lens
			<input type="checkbox"/> G7 RAL 7006 Beige gray	<input type="checkbox"/> W 3000K CRI > 90		
			<input type="checkbox"/> M8 RAL 8019 Brown	<input type="checkbox"/> W1 3000K CRI > 95		
			<input type="checkbox"/> H RAL 9005 Black	<input type="checkbox"/> K 3500K CRI > 90		
				<input type="checkbox"/> K1 3500K CRI > 95		
				<input type="checkbox"/> D 4000K CRI > 90		

+

ACCESSORI INTERCambiabili
INTERCHANGEABLE ACCESSORIESLenti
LensesFiltri ottici
Optical filtersAnelli porta filtro
Filter holder ringsAnelli decorativi
Decorative rings

[1]

Lente 14° non intercambiabile
14° Lens not interchangeable

	Lente 18° 18° Lens A01192.80
	Lente 24° 24° Lens A01193.80
	Lente 33° 33° Lens A01194.80
	Lente 52° 52° Lens A01195.80


	Filtro Ellittico Elliptical Filter A01182.80
	Filtro Nido d'ape Hex Louver A01183.40
	Filtro Prismatico Prismatic Filter A01184.80
	Filtro Correttivo Softening Lens A01185.80

	Cromo Lucido Shiny Chrome A01272.10
	Oro Lucido Gold Chrome A01272.10
	Oro Satinato Satin Gold A01272.80
	Nichel Satinato Satin Nickel A01272.N0
	Nero Black A01272.40

	Cromo Lucido Shiny Chrome A01190.10
	Oro Lucido Gold Chrome A01190.10
	Oro Satinato Satin Gold A01190.80
	Nichel Satinato Satin Nickel A01190.N0
	Nero Black A01190.40

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

500mA	CC20-F-500-N	pag. 63
700mA	CC20-F-700-N	pag. 68

EXAMPLE CODE COMPOSITION
123456.

DGA

ARIEL RF



- IP40
- Class III
- Incasso a parete, soffitto
Wall, ceiling recessed
- Installazione a filo
Trimless installation


- Collegare in serie 500mA o 700mA
Connect in series at 500mA or 700mA
- 450 gr
- Ø 86 mm
- Altamente riciclabile
Highly recyclable

ARIEL RF

STRUTTURA FRAME A00656.30 Nell'ordine richiedere sempre 1 Struttura per ogni Ariel RF
Please specify always 1 Frame for each Ariel RF in the purchase order



MODULO - MODULE ARIEL RF	9W 500mA	13W 700mA	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	900lm	1100lm				
[1] 14° Lens	7Q4425.____	7Q4426.____	<input type="checkbox"/> S RAL 9010 Warm white	<input type="checkbox"/> U1 2200K CRI > 90	<input type="checkbox"/> 1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
18° Lens	784425.____	784426.____	<input type="checkbox"/> 7 RAL 9003 White	<input type="checkbox"/> B2 2400K CRI > 90	<input type="checkbox"/> I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
24° Lens	7G4425.____	7G4426.____	<input type="checkbox"/> A6 RAL 9002 Gray white	<input type="checkbox"/> X 2700K CRI > 90	<input type="checkbox"/> 8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
33° Lens	7E4425.____	7E4426.____	<input type="checkbox"/> C RAL 7033 Gothic Cement	<input type="checkbox"/> X1 2700K CRI > 95	<input type="checkbox"/> N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
52° Lens	754425.____	754426.____	<input type="checkbox"/> G3 RAL 7012 Gray	<input type="checkbox"/> 6 3000K CRI > 80	<input type="checkbox"/> 4 Nero - Black	S Filtro Correttivo Softening Lens
			<input type="checkbox"/> G7 RAL 7006 Beige gray	<input type="checkbox"/> W 3000K CRI > 90		
			<input type="checkbox"/> M8 RAL 8019 Brown	<input type="checkbox"/> W1 3000K CRI > 95		
			<input type="checkbox"/> H RAL 9005 Black	<input type="checkbox"/> K 3500K CRI > 90		
				<input type="checkbox"/> K1 3500K CRI > 95		
				<input type="checkbox"/> D 4000K CRI > 90		



ACCESSORI INTERCAMBIABILI INTERCHANGEABLE ACCESSORIES

[1] Lente 14° non intercambiabile
14° Lens not interchangeable

Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
Lente 18° 18° Lens A01192.80	Filtro Ellittico Elliptical Filter A01182.80	Cromo Lucido Shiny Chrome A01272.10	Cromo Lucido Shiny Chrome A01190.10
Lente 24° 24° Lens A01193.80	Filtro Nido d'ape Hex Louver A01183.40	Oro Lucido Gold Chrome A01272.10	Oro Lucido Gold Chrome A01190.10
Lente 33° 33° Lens A01194.80	Filtro Prismatico Prismatic Filter A01184.80	Oro Satinato Satin Gold A01272.80	Oro Satinato Satin Gold A01190.80
Lente 52° 52° Lens A01195.80	Filtro Correttivo Softening Lens A01185.80	Nichel Satinato Satin Nickel A01272.N0	Nichel Satinato Satin Nickel A01190.N0
		Nero Black A01272.40	Nero Black A01190.40




ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

ACCESSORI
ACCESSORIES

500mA CC20-F-500-N pag. 63
700mA CC20-F-700-N pag. 68








Fresa a tazza
Hole saw
A00833.H0

EXAMPLE CODE COMPOSITION
123456.



DGA

ARIEL IN&OUT m

-  IP40
-  Class III
-  Incasso a parete, soffitto
Wall, ceiling recessed
-  Collegare in serie 500mA o 700mA
Connect in series at 500mA or 700mA
-  540 gr
-  Ø 67 mm
-  Altamente riciclabile
Highly recyclable



ARIEL IN&OUT m

STRUTTURA
FRAME

A01293_0

MODULE FINISH






Nell'ordine richiedere sempre 1 Struttura per ogni Ariel In&Out m
Please specify always 1 Frame for each Ariel In&Out m in the purchase order Vedi finiture modulo
See module finishMODULO - MODULE
ARIEL IN&OUT m9W
500mA13W
700mAFiniture modulo
Module finishesColore LED
LED ColourAnelli decorativi
Decorative ringsFiltri ottici
Optical filters

Lumen Output 3000K

900lm

1100lm

[1]


 14° Lens	7Q4421_ _ _ _	7Q4422_ _ _ _
 18° Lens	784421_ _ _ _	784422_ _ _ _
 24° Lens	7G4421_ _ _ _	7G4422_ _ _ _
 33° Lens	7E4421_ _ _ _	7E4422_ _ _ _
 52° Lens	754421_ _ _ _	754422_ _ _ _

<input type="checkbox"/> S RAL 9010 Warm white	<input type="checkbox"/> U1 2200K CRI > 90	<input type="checkbox"/> 1 Cromo Lucido Shiny Chrome
<input type="checkbox"/> 7 RAL 9003 White	<input type="checkbox"/> B2 2400K CRI > 90	<input type="checkbox"/> I Oro Lucido Gold Chrome
<input type="checkbox"/> A6 RAL 9002 Gray white	<input type="checkbox"/> X 2700K CRI > 90	<input type="checkbox"/> 8 Oro Satinato Satin Gold
<input type="checkbox"/> C RAL 7033 Gothic Cement	<input type="checkbox"/> X1 2700K CRI > 95	<input type="checkbox"/> N Nichel Satinato Satin Nickel
<input type="checkbox"/> G3 RAL 7012 Gray	<input type="checkbox"/> 6 3000K CRI > 80	<input type="checkbox"/> 4 Nero - Black
<input type="checkbox"/> G7 RAL 7006 Beige gray	<input type="checkbox"/> W 3000K CRI > 90	
<input type="checkbox"/> M8 RAL 8019 Brown	<input type="checkbox"/> W1 3000K CRI > 95	
<input type="checkbox"/> H RAL 9005 Black	<input type="checkbox"/> K 3500K CRI > 90	
	<input type="checkbox"/> K1 3500K CRI > 95	
	<input type="checkbox"/> D 4000K CRI > 90	

<input type="checkbox"/> W Senza Filtro Without Filter
<input type="checkbox"/> E Filtro Ellittico Elliptical Filter
<input type="checkbox"/> H Nido D'ape Hex Louver
<input type="checkbox"/> P Filtro Prismatico Prismatic Filter
<input type="checkbox"/> S Filtro Correttivo Softening Lens






+

ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIESLenti
LensesFiltri ottici
Optical filtersAnelli porta filtro
Filter holder ringsAnelli decorativi
Decorative rings

[1]

Lente 14° non intercambiabile
14° Lens not interchangeable

	Lente 18° 18° Lens A01192.80
	Lente 24° 24° Lens A01193.80
	Lente 33° 33° Lens A01194.80
	Lente 52° 52° Lens A01195.80


	Filtro Ellittico Elliptical Filter A01182.80
	Filtro Nido d'ape Hex Louver A01183.40
	Filtro Prismatico Prismatic Filter A01184.80
	Filtro Correttivo Softening Lens A01185.80

	Cromo Lucido Shiny Chrome A01272.10
	Oro Lucido Gold Chrome A01272.10
	Oro Satinato Satin Gold A01272.80
	Nichel Satinato Satin Nickel A01272.N0
	Nero Black A01272.40

	Cromo Lucido Shiny Chrome A01190.10
	Oro Lucido Gold Chrome A01190.10
	Oro Satinato Satin Gold A01190.80
	Nichel Satinato Satin Nickel A01190.N0
	Nero Black A01190.40





ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)





500mA	CC20-F-500-N	pag. 63
700mA	CC20-F-700-N	pag. 68

EXAMPLE CODE COMPOSITION
123456.

DGA

ARIEL IN&OUT F

-  IP40
-  Class III
-  Incasso a parete, soffitto
Wall, ceiling recessed
-  Installazione a filo
Trimless installation

-  Collegare in serie 500mA o 700mA
Connect in series at 500mA or 700mA
-  530 gr
-  Ø 64 mm
-  Altamente riciclabile
Highly recyclable





















ARIEL IN&OUT F


STRUTTURA FRAME A00654._0

Nell'ordine richiedere sempre 1 Struttura per ogni Ariel In&Out F
Please specify always 1 Frame for each Ariel In&Out F in the purchase order

-  3 Grigio - Gray
-  4 Nero - Black



MODULO - MODULE ARIEL IN&OUT F	9W 500mA	13W 700mA	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	900lm	1100lm				
[1]  14° Lens	7Q4421._ _ _ _	7Q4422._ _ _ _	<input type="checkbox"/> S RAL 9010 Warm white	 U1 2200K CRI > 90	 1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
 18° Lens	784421._ _ _ _	784422._ _ _ _	<input type="checkbox"/> 7 RAL 9003 White	 B2 2400K CRI > 90	 I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
 24° Lens	7G4421._ _ _ _	7G4422._ _ _ _	<input type="checkbox"/> A6 RAL 9002 Gray white	 X 2700K CRI > 90	 8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
 33° Lens	7E4421._ _ _ _	7E4422._ _ _ _	<input type="checkbox"/> C RAL 7033 Gothic Cement	 X1 2700K CRI > 95	<input type="checkbox"/> N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
 52° Lens	754421._ _ _ _	754422._ _ _ _	<input type="checkbox"/> G3 RAL 7012 Gray	 6 3000K CRI > 80	<input type="checkbox"/> 4 Nero - Black	S Filtro Correttivo Softening Lens
			<input type="checkbox"/> G7 RAL 7006 Beige gray	 W 3000K CRI > 90		
			<input type="checkbox"/> M8 RAL 8019 Brown	 W1 3000K CRI > 95		
			<input type="checkbox"/> H RAL 9005 Black	 K 3500K CRI > 90		
				 K1 3500K CRI > 95		
				 D 4000K CRI > 90		



ACCESSORI INTERCambiabili INTERCHANGEABLE ACCESSORIES

[1] Lente 14° non intercambiabile
14° Lens not interchangeable

Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Lente 18° 18° Lens A01192.80	 Filtro Ellittico Elliptical Filter A01182.80	 Cromo Lucido Shiny Chrome A01272.10	 Cromo Lucido Shiny Chrome A01190.10
 Lente 24° 24° Lens A01193.80	 Filtro Nido d'ape Hex Louver A01183.40	 Oro Lucido Gold Chrome A01272.10	 Oro Lucido Gold Chrome A01190.10
 Lente 33° 33° Lens A01194.80	 Filtro Prismatico Prismatic Filter A01184.80	 Oro Satinato Satin Gold A01272.80	 Oro Satinato Satin Gold A01190.80
 Lente 52° 52° Lens A01195.80	 Filtro Correttivo Softening Lens A01185.80	 Nichel Satinato Satin Nickel A01272.N0	 Nichel Satinato Satin Nickel A01190.N0
		 Nero Black A01272.40	 Nero Black A01190.40

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)


ACCESSORI
ACCESSORIES



500mA CC20-F-500-N pag. 63
700mA CC20-F-700-N pag. 68








Fresa a tazza
Hole saw
A00830.H0

EXAMPLE CODE COMPOSITION
123456.



DGA

SATURNO Am

-  IP40
-  Class III
-  Incasso a parete, soffitto
Wall, ceiling recessed
-  Collegare in serie 500mA
Connect in series at 500mA
-  480 gr
-  Ø 67 mm
-  Altamente riciclabile
Highly recyclable



SATURNO Am

STRUTTURA
FRAME

A01235_0

MODULE FINISH






Nell'ordine richiedere sempre 1 Struttura per ogni Saturno Am
Please specify always 1 Frame for each Saturno Am in the purchase order _ Vedi finiture modulo
See module finishMODULO - MODULE
SATURNO Am18W
500mA


Lumen Output 3000K



2100lm





Finiture modulo
Module finishesColore LED
LED ColourAnelli decorativi
Decorative ringsFiltri ottici
Optical filters

+

[1]  12° Lens	7Q4410_ _ _ _	<input type="checkbox"/> S RAL 9010 Warm white	<input type="checkbox"/> U1 2200K CRI > 90	<input type="checkbox"/> 1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
 18° Lens	784410_ _ _ _	<input type="checkbox"/> 7 RAL 9003 White	<input type="checkbox"/> B2 2400K CRI > 90	<input type="checkbox"/> I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
 24° Lens	7G4410_ _ _ _	<input type="checkbox"/> A6 RAL 9002 Gray white	<input type="checkbox"/> X 2700K CRI > 90	<input type="checkbox"/> 8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
 33° Lens	7E4410_ _ _ _	<input type="checkbox"/> C RAL 7033 Gothic Cement	<input type="checkbox"/> X1 2700K CRI > 95	<input type="checkbox"/> N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
 52° Lens	754410_ _ _ _	<input type="checkbox"/> G3 RAL 7012 Gray	<input type="checkbox"/> 6 3000K CRI > 80	<input type="checkbox"/> 4 Nero - Black	S Filtro Correttivo Softening Lens
		<input type="checkbox"/> G7 RAL 7006 Beige gray	<input type="checkbox"/> W 3000K CRI > 90		
		<input type="checkbox"/> M8 RAL 8019 Brown	<input type="checkbox"/> W1 3000K CRI > 95		
		<input type="checkbox"/> H RAL 9005 Black	<input type="checkbox"/> K 3500K CRI > 90		
			<input type="checkbox"/> K1 3500K CRI > 95		
			<input type="checkbox"/> D 4000K CRI > 90		

ACCESSORI INTERCambiabili
INTERCHANGEABLE ACCESSORIESLenti
LensesFiltri ottici
Optical filtersAnelli porta filtro
Filter holder ringsAnelli decorativi
Decorative rings[1]
Lente 12° non intercambiabile
12° Lens not interchangeable

	Lente 18° 18° Lens A01196.80
	Lente 24° 24° Lens A01197.80
	Lente 33° 33° Lens A01198.80
	Lente 52° 52° Lens A01199.80


	Filtro Ellittico Elliptical Filter A01186.80
	Filtro Nido d'ape Hex Louver A01187.40
	Filtro Prismatico Prismatic Filter A01188.80
	Filtro Correttivo Softening Lens A01189.80

	Cromo Lucido Shiny Chrome A01273.10
	Oro Lucido Gold Chrome A01273.10
	Oro Satinato Satin Gold A01273.80
	Nichel Satinato Satin Nickel A01273.N0
	Nero Black A01273.40

	Cromo Lucido Shiny Chrome A01191.10
	Oro Lucido Gold Chrome A01191.10
	Oro Satinato Satin Gold A01191.80
	Nichel Satinato Satin Nickel A01191.N0
	Nero Black A01191.40

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)





500mA CC20-F-500-N pag. 63





EXAMPLE CODE COMPOSITION
123456.

DGA

SATURNO AF








-  IP40
-  Class III
-  Incasso a parete, soffitto
Wall, ceiling recessed
-  Installazione a filo
Trimless installation


-  Collegare in serie 500mA
Connect in series at 500mA
-  430 gr
-  Ø 64 mm
-  Altamente riciclabile
Highly recyclable



















SATURNO AF

STRUTTURA FRAME	A01234.30	Nell'ordine richiedere sempre 1 Struttura per ogni Saturno AF Please specify always 1 Frame for each Saturno AF in the purchase order
--------------------	-----------	--



MODULO - MODULE SATURNO AF	18W 500mA	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	2100lm				
[1]  12° Lens	7Q4410.____	<input type="checkbox"/> S RAL 9010 Warm white	<input type="checkbox"/> U1 2200K CRI > 90	<input type="checkbox"/> 1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
 18° Lens	784410.____	<input type="checkbox"/> 7 RAL 9003 White	<input type="checkbox"/> B2 2400K CRI > 90	<input type="checkbox"/> I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
 24° Lens	7G4410.____	<input type="checkbox"/> A6 RAL 9002 Gray white	<input type="checkbox"/> X 2700K CRI > 90	<input type="checkbox"/> 8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
 33° Lens	7E4410.____	<input type="checkbox"/> C RAL 7033 Gothic Cement	<input type="checkbox"/> X1 2700K CRI > 95	<input type="checkbox"/> N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
 52° Lens	754410.____	<input type="checkbox"/> G3 RAL 7012 Gray	<input type="checkbox"/> 6 3000K CRI > 80	<input type="checkbox"/> 4 Nero - Black	S Filtro Correttivo Softening Lens
		<input type="checkbox"/> G7 RAL 7006 Beige gray	<input type="checkbox"/> W 3000K CRI > 90		
		<input type="checkbox"/> M8 RAL 8019 Brown	<input type="checkbox"/> W1 3000K CRI > 95		
		<input type="checkbox"/> H RAL 9005 Black	<input type="checkbox"/> K 3500K CRI > 90		
			<input type="checkbox"/> K1 3500K CRI > 95		
			<input type="checkbox"/> D 4000K CRI > 90		



ACCESSORI INTERCambiabili INTERCHANGEABLE ACCESSORIES	Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
[1] Lente 12° non intercambiabile 12° Lens not interchangeable	 Lente 18° 18° Lens A01196.80	 Filtro Ellittico Elliptical Filter A01186.80	 Cromo Lucido Shiny Chrome A01273.10	 Cromo Lucido Shiny Chrome A01191.10
	 Lente 24° 24° Lens A01197.80	 Filtro Nido d'ape Hex Louver A01187.40	 Oro Lucido Gold Chrome A01273.10	 Oro Lucido Gold Chrome A01191.10
	 Lente 33° 33° Lens A01198.80	 Filtro Prismatico Prismatic Filter A01188.80	 Oro Satinato Satin Gold A01273.80	 Oro Satinato Satin Gold A01191.80
	 Lente 52° 52° Lens A01199.80	 Filtro Correttivo Softening Lens A01189.80	 Nichel Satinato Satin Nickel A01273.N0	 Nichel Satinato Satin Nickel A01191.N0
			 Nero Black A01273.40	 Nero Black A01191.40

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)


ACCESSORI
ACCESSORIES



500mA CC20-F-500-N pag. 63








Fresa a tazza
Hole saw
A00830.H0

EXAMPLE CODE COMPOSITION
123456.



DGA

SATURNO mR

-  IP40
-  Class III
-  Incasso a parete, soffitto
Wall, ceiling recessed
-  Collegare in serie 500mA
Connect in series at 500mA
-  830 gr
-  Ø 102 mm
-  Altamente riciclabile
Highly recyclable



SATURNO mR

STRUTTURA
FRAME

A01269._0

MODULE FINISH

Nell'ordine richiedere sempre 1 Struttura per ogni Saturno mR
Please specify always 1 Frame for each Saturno mR in the purchase order

_ Vedi finiture modulo
See module finish






MODULO - MODULE
SATURNO mR18W
500mA

Lumen Output 3000K

2100lm


Finiture modulo
Module finishesColore LED
LED ColourAnelli decorativi
Decorative ringsFiltri ottici
Optical filters

+


[1]	 12° Lens	7Q4457._ _ _ _
	 18° Lens	784457._ _ _ _
	 24° Lens	7G4457._ _ _ _
	 33° Lens	7E4457._ _ _ _
	 52° Lens	754457._ _ _ _

<input type="checkbox"/> S	RAL 9010 Warm white	<input type="checkbox"/> U1	2200K CRI > 90	<input type="checkbox"/> 1	Cromo Lucido Shiny Chrome
<input type="checkbox"/> 7	RAL 9003 White	<input type="checkbox"/> B2	2400K CRI > 90	<input type="checkbox"/> I	Oro Lucido Gold Chrome
<input type="checkbox"/> A6	RAL 9002 Gray white	<input type="checkbox"/> X	2700K CRI > 90	<input type="checkbox"/> 8	Oro Satinato Satin Gold
<input type="checkbox"/> C	RAL 7033 Gothic Cement	<input type="checkbox"/> X1	2700K CRI > 95	<input type="checkbox"/> N	Nichel Satinato Satin Nickel
<input type="checkbox"/> G3	RAL 7012 Gray	<input type="checkbox"/> 6	3000K CRI > 80	<input type="checkbox"/> 4	Nero - Black
<input type="checkbox"/> G3	RAL 7012 Gray	<input type="checkbox"/> W	3000K CRI > 90		
<input type="checkbox"/> G7	RAL 7006 Beige gray	<input type="checkbox"/> W1	3000K CRI > 95		
<input type="checkbox"/> M8	RAL 8019 Brown	<input type="checkbox"/> K	3500K CRI > 90		
<input type="checkbox"/> H	RAL 9005 Black	<input type="checkbox"/> K1	3500K CRI > 95		
		<input type="checkbox"/> D	4000K CRI > 90		

<input type="checkbox"/> W	Senza Filtro Without Filter
<input type="checkbox"/> E	Filtro Ellittico Elliptical Filter
<input type="checkbox"/> H	Nido D'ape Hex Louver
<input type="checkbox"/> P	Filtro Prismatico Prismatic Filter
<input type="checkbox"/> S	Filtro Correttivo Softening Lens

ACCESSORI INTERCambiabili
INTERCHANGEABLE ACCESSORIESLenti
LensesFiltri ottici
Optical filtersAnelli porta filtro
Filter holder ringsAnelli decorativi
Decorative rings

[1]
Lente 12° non intercambiabile
12° Lens not interchangeable

	Lente 18° 18° Lens A01196.80
	Lente 24° 24° Lens A01197.80
	Lente 33° 33° Lens A01198.80
	Lente 52° 52° Lens A01199.80


	Filtro Ellittico Elliptical Filter A01186.80
	Filtro Nido d'ape Hex Louver A01187.40
	Filtro Prismatico Prismatic Filter A01188.80
	Filtro Correttivo Softening Lens A01189.80

	Cromo Lucido Shiny Chrome A01273.10
	Oro Lucido Gold Chrome A01273.10
	Oro Satinato Satin Gold A01273.80
	Nichel Satinato Satin Nickel A01273.N0
	Nero Black A01273.40

	Cromo Lucido Shiny Chrome A01191.10
	Oro Lucido Gold Chrome A01191.10
	Oro Satinato Satin Gold A01191.80
	Nichel Satinato Satin Nickel A01191.N0
	Nero Black A01191.40

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

500mA CC20-F-500-N pag. 63

EXAMPLE CODE COMPOSITION
123456.

DGA

SATURNO RF



- IP40
- Class III
- Incasso a parete, soffitto
Wall, ceiling recessed
- Installazione a filo
Trimless installation


- Collegare in serie 500mA
Connect in series at 500mA
- 920 gr
- Ø 104 mm
- Altamente riciclabile
Highly recyclable

SATURNO RF

STRUTTURA FRAME A01236.30 Nell'ordine richiedere sempre 1 Struttura per ogni Saturno RF
Please specify always 1 Frame for each Saturno RF in the purchase order



MODULO - MODULE SATURNO RF	18W 500mA	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	2100lm				
[1] 12° Lens	7Q4457. _ _ _ _	<input type="checkbox"/> S RAL 9010 Warm white	<input type="checkbox"/> U1 2200K CRI > 90	<input type="checkbox"/> 1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
18° Lens	784457. _ _ _ _	<input type="checkbox"/> 7 RAL 9003 White	<input type="checkbox"/> B2 2400K CRI > 90	<input type="checkbox"/> I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
24° Lens	7G4457. _ _ _ _	<input type="checkbox"/> A6 RAL 9002 Gray white	<input type="checkbox"/> X 2700K CRI > 90	<input type="checkbox"/> 8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
33° Lens	7E4457. _ _ _ _	<input type="checkbox"/> C RAL 7033 Gothic Cement	<input type="checkbox"/> X1 2700K CRI > 95	<input type="checkbox"/> N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
52° Lens	754457. _ _ _ _	<input type="checkbox"/> G3 RAL 7012 Gray	<input type="checkbox"/> 6 3000K CRI > 80	<input type="checkbox"/> 4 Nero - Black	S Filtro Correttivo Softening Lens
		<input type="checkbox"/> G7 RAL 7006 Beige gray	<input type="checkbox"/> W 3000K CRI > 90		
		<input type="checkbox"/> M8 RAL 8019 Brown	<input type="checkbox"/> W1 3000K CRI > 95		
		<input type="checkbox"/> H RAL 9005 Black	<input type="checkbox"/> K 3500K CRI > 90		
			<input type="checkbox"/> K1 3500K CRI > 95		
			<input type="checkbox"/> D 4000K CRI > 90		



ACCESSORI INTERCambiabili INTERCHANGEABLE ACCESSORIES

[1] Lente 12° non intercambiabile
12° Lens not interchangeable

Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
Lente 18° 18° Lens A01196.80	Filtro Ellittico Elliptical Filter A01186.80	Cromo Lucido Shiny Chrome A01273.10	Cromo Lucido Shiny Chrome A01191.10
Lente 24° 24° Lens A01197.80	Filtro Nido d'ape Hex Louver A01187.40	Oro Lucido Gold Chrome A01273.10	Oro Lucido Gold Chrome A01191.10
Lente 33° 33° Lens A01198.80	Filtro Prismatico Prismatic Filter A01188.80	Oro Satinato Satin Gold A01273.80	Oro Satinato Satin Gold A01191.80
Lente 52° 52° Lens A01199.80	Filtro Correttivo Softening Lens A01189.80	Nichel Satinato Satin Nickel A01273.N0	Nichel Satinato Satin Nickel A01191.N0
		Nero Black A01273.40	Nero Black A01191.40

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)


ACCESSORI
ACCESSORIES



500mA CC20-F-500-N pag. 63








Fresa a tazza
Hole saw
A01258.H0

EXAMPLE CODE COMPOSITION
123456.



DGA

SATURNO IN&OUT m

-  IP40
-  Class III
-  Incasso a parete, soffitto
Wall, ceiling recessed
-  Collegare in serie 500mA
Connect in series at 500mA
-  840 gr
-  Ø 86 mm
-  Altamente riciclabile
Highly recyclable



SATURNO IN&OUT m

STRUTTURA
FRAME

A01294._0

MODULE FINISH






Nell'ordine richiedere sempre 1 Struttura per ogni Saturno In&Out m _ Vedi finiture modulo
Please specify always 1 Frame for each Saturno In&Out m in the purchase order See module finish



MODULO - MODULE
SATURNO IN&OUT m 18W
500mA

Lumen Output 3000K 2100lm

Finiture modulo
Module finishesColore LED
LED ColourAnelli decorativi
Decorative ringsFiltri ottici
Optical filters



[1]  12° Lens	7Q4416._ _ _ _
 18° Lens	784416._ _ _ _
 24° Lens	7G4416._ _ _ _
 33° Lens	7E4416._ _ _ _
 52° Lens	754416._ _ _ _

<input type="checkbox"/> S RAL 9010 Warm white	<input type="checkbox"/> U1 2200K CRI > 90	<input type="checkbox"/> 1 Cromo Lucido Shiny Chrome
<input type="checkbox"/> 7 RAL 9003 White	<input type="checkbox"/> B2 2400K CRI > 90	<input type="checkbox"/> I Oro Lucido Gold Chrome
<input type="checkbox"/> A6 RAL 9002 Gray white	<input type="checkbox"/> X 2700K CRI > 90	<input type="checkbox"/> 8 Oro Satinato Satin Gold
<input type="checkbox"/> C RAL 7033 Gothic Cement	<input type="checkbox"/> X1 2700K CRI > 95	<input type="checkbox"/> N Nichel Satinato Satin Nickel
<input type="checkbox"/> G3 RAL 7012 Gray	<input type="checkbox"/> 6 3000K CRI > 80	<input type="checkbox"/> 4 Nero - Black
<input type="checkbox"/> G7 RAL 7006 Beige gray	<input type="checkbox"/> W 3000K CRI > 90	
<input type="checkbox"/> M8 RAL 8019 Brown	<input type="checkbox"/> W1 3000K CRI > 95	
<input type="checkbox"/> H RAL 9005 Black	<input type="checkbox"/> K 3500K CRI > 90	
	<input type="checkbox"/> K1 3500K CRI > 95	
	<input type="checkbox"/> D 4000K CRI > 90	

W Senza Filtro Without Filter
E Filtro Ellittico Elliptical Filter
H Nido D'ape Hex Louver
P Filtro Prismatico Prismatic Filter
S Filtro Correttivo Softening Lens

ACCESSORI INTERCambiabili
INTERCHANGEABLE ACCESSORIESLenti
LensesFiltri ottici
Optical filtersAnelli porta filtro
Filter holder ringsAnelli decorativi
Decorative rings


[1]
Lente 12° non intercambiabile
12° Lens not interchangeable

	Lente 18° 18° Lens A01196.80
	Lente 24° 24° Lens A01197.80
	Lente 33° 33° Lens A01198.80
	Lente 52° 52° Lens A01199.80


	Filtro Ellittico Elliptical Filter A01186.80
	Filtro Nido d'ape Hex Louver A01187.40
	Filtro Prismatico Prismatic Filter A01188.80
	Filtro Correttivo Softening Lens A01189.80

	Cromo Lucido Shiny Chrome A01273.10
	Oro Lucido Gold Chrome A01273.10
	Oro Satinato Satin Gold A01273.80
	Nichel Satinato Satin Nickel A01273.N0
	Nero Black A01273.40

	Cromo Lucido Shiny Chrome A01191.10
	Oro Lucido Gold Chrome A01191.10
	Oro Satinato Satin Gold A01191.80
	Nichel Satinato Satin Nickel A01191.N0
	Nero Black A01191.40

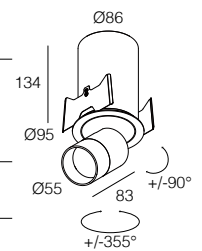



ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

500mA CC20-F-500-N pag. 63





EXAMPLE CODE COMPOSITION
123456.

DGA



SATURNO IN&OUT F

-  IP40
-  Class III
-  Incasso a parete, soffitto
Wall, ceiling recessed
-  Installazione a filo
Trimless installation
































-  Collegare in serie 500mA
Connect in series at 500mA
-  830 gr
-  Ø 86 mm
-  Altamente riciclabile
Highly recyclable


SATURNO IN&OUT F

STRUTTURA FRAME	A01238_0	Nell'ordine richiedere sempre 1 Struttura per ogni Saturno In&Out F Please specify always 1 Frame for each Saturno In&Out F in the purchase order	 3 Grigio - Gray	 4 Nero - Black
--------------------	----------	--	---	--



MODULO - MODULE SATURNO IN&OUT F	18W 500mA	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	2100lm				
[1]  12° Lens	7Q4416_ _ _ _	 S RAL 9010 Warm white	 U1 2200K CRI > 90	 1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
 18° Lens	784416_ _ _ _	 7 RAL 9003 White	 B2 2400K CRI > 90	 I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
 24° Lens	7G4416_ _ _ _	 A6 RAL 9002 Gray white	 X 2700K CRI > 90	 8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
 33° Lens	7E4416_ _ _ _	 C RAL 7033 Gothic Cement	 X1 2700K CRI > 95	 N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
 52° Lens	754416_ _ _ _	 G3 RAL 7012 Gray	 6 3000K CRI > 80	 4 Nero - Black	S Filtro Correttivo Softening Lens
		 G7 RAL 7006 Beige gray	 W 3000K CRI > 90		
		 M8 RAL 8019 Brown	 W1 3000K CRI > 95		
		 H RAL 9005 Black	 K 3500K CRI > 90		
			 K1 3500K CRI > 95		
			 D 4000K CRI > 90		

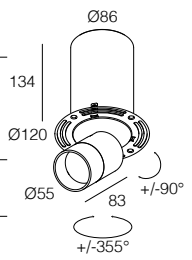

ACCESSORI INTERCambiabili INTERCHANGEABLE ACCESSORIES	Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
[1] Lente 12° non intercambiabile 12° Lens not interchangeable	 Lente 18° 18° Lens A01196.80	 Filtro Ellittico Elliptical Filter A01186.80	 Cromo Lucido Shiny Chrome A01273.10	 Cromo Lucido Shiny Chrome A01191.10
	 Lente 24° 24° Lens A01197.80	 Filtro Nido d'ape Hex Louver A01187.40	 Oro Lucido Gold Chrome A01273.10	 Oro Lucido Gold Chrome A01191.10
	 Lente 33° 33° Lens A01198.80	 Filtro Prismatico Prismatic Filter A01188.80	 Oro Satinato Satin Gold A01273.80	 Oro Satinato Satin Gold A01191.80
	 Lente 52° 52° Lens A01199.80	 Filtro Correttivo Softening Lens A01189.80	 Nichel Satinato Satin Nickel A01273.N0	 Nichel Satinato Satin Nickel A01191.N0
			 Nero Black A01273.40	 Nero Black A01191.40

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)


ACCESSORI
ACCESSORIES



500mA CC20-F-500-N pag. 63

Fresa a tazza
Hole saw
A00833.H0

EXAMPLE CODE COMPOSITION
123456.



DGA

ARIEL B 48V



IP40



Class III


Binario a parete, soffitto
Wall, ceiling mounting trackCollegare a binario a bassa tensione 48Vdc
Connect to 48Vdc low voltage track

150 gr

Altamente riciclabile
Highly recyclable

ARIEL B 48V

	10W 48Vdc	14W 48Vdc	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	900lm	1100lm				
[1] 14° Lens	7Q4497.____	7Q4498.____	S RAL 9010 Warm white	U1 2200K CRI > 90	1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
18° Lens	784497.____	784498.____	7 RAL 9003 White	B2 2400K CRI > 90	I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
24° Lens	7G4497.____	7G4498.____	A6 RAL 9002 Gray white	X 2700K CRI > 90	8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
33° Lens	7E4497.____	7E4498.____	C RAL 7033 Gothic Cement	X1 2700K CRI > 95	N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
52° Lens	754497.____	754498.____	G3 RAL 7012 Gray	6 3000K CRI > 80	4 Nero - Black	S Filtro Correttivo Softening Lens
			G7 RAL 7006 Beige gray	W 3000K CRI > 90		
			M8 RAL 8019 Brown	W1 3000K CRI > 95		
			H RAL 9005 Black	K 3500K CRI > 90		
				K1 3500K CRI > 95		
				D 4000K CRI > 90		

ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES[1]
Lente 14° non intercambiabile
14° Lens not interchangeableLenti
Lenses

	Lente 18° 18° Lens A01192.80
	Lente 24° 24° Lens A01193.80
	Lente 33° 33° Lens A01194.80
	Lente 52° 52° Lens A01195.80

Filtri ottici
Optical filters

	Filtro Ellittico Elliptical Filter A01182.80
	Filtro Nido d'ape Hex Louver A01183.40
	Filtro Prismatico Prismatic Filter A01184.80
	Filtro Correttivo Softening Lens A01185.80

Anelli porta filtro
Filter holder rings


	Cromo Lucido Shiny Chrome A01272.10
	Oro Lucido Gold Chrome A01272.10
	Oro Satinato Satin Gold A01272.80
	Nichel Satinato Satin Nickel A01272.N0
	Nero Black A01272.40

Anelli decorativi
Decorative rings

	Cromo Lucido Shiny Chrome A01190.10
	Oro Lucido Gold Chrome A01190.10
	Oro Satinato Satin Gold A01190.80
	Nichel Satinato Satin Nickel A01190.N0
	Nero Black A01190.40

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)48Vdc
pag. 76

CV75-F-48-NI

Micro Binarì 48Vdc
48Vdc Micro Track
pag. 56EXAMPLE CODE COMPOSITION
123456.



ARIEL B 48V DALI




- IP40
- Class III
- Binario a parete, soffitto
Wall, ceiling mounting track
- Collegare a binario a bassa tensione 48Vdc
Connect to 48Vdc low voltage track
- 150 gr
- Altamente riciclabile
Highly recyclable



ARIEL B 48V DALI

	10W 48Vdc	14W 48Vdc	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	900lm	1100lm				
[1] 14° Lens	7Q4412.____	7Q4413.____	S RAL 9010 Warm white	U1 2200K CRI > 90	1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
18° Lens	784412.____	784413.____	7 RAL 9003 White	B2 2400K CRI > 90	I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
24° Lens	7G4412.____	7G4413.____	A6 RAL 9002 Gray white	X 2700K CRI > 90	8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
33° Lens	7E4412.____	7E4413.____	C RAL 7033 Gothic Cement	X1 2700K CRI > 95	N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
52° Lens	754412.____	754413.____	G3 RAL 7012 Gray	6 3000K CRI > 80	4 Nero - Black	S Filtro Correttivo Softening Lens
			G7 RAL 7006 Beige gray	W 3000K CRI > 90		
			M8 RAL 8019 Brown	W1 3000K CRI > 95		
			H RAL 9005 Black	K 3500K CRI > 90		
				K1 3500K CRI > 95		
				D 4000K CRI > 90		



ACCESSORI INTERCAMBIABILI INTERCHANGEABLE ACCESSORIES

[1] Lente 14° non intercambiabile
14° Lens not interchangeable

Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
Lente 18° 18° Lens A01192.80	Filtro Ellittico Elliptical Filter A01182.80	Cromo Lucido Shiny Chrome A01272.10	Cromo Lucido Shiny Chrome A01190.10
Lente 24° 24° Lens A01193.80	Filtro Nido d'ape Hex Louver A01183.40	Oro Lucido Gold Chrome A01272.10	Oro Lucido Gold Chrome A01190.10
Lente 33° 33° Lens A01194.80	Filtro Prismatico Prismatic Filter A01184.80	Oro Satinato Satin Gold A01272.80	Oro Satinato Satin Gold A01190.80
Lente 52° 52° Lens A01195.80	Filtro Correttivo Softening Lens A01185.80	Nichel Satinato Satin Nickel A01272.N0	Nichel Satinato Satin Nickel A01190.N0
		Nero Black A01272.40	Nero Black A01190.40




ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

48Vdc **CV75-F-48-NI**
pag. 76

Micro Binari 48Vdc
48Vdc Micro Track
pag. 56

* Prevedere 1 indirizzo DALI per ogni Ariel B 48V
Please consider 1 DALI address for each Ariel B 48V

EXAMPLE CODE COMPOSITION
123456.



DGA

SATURNO B



IP40



Class II


Binario a parete, soffitto
Wall, ceiling mounting trackFornito con attacco a binario 230Vac
Provided with 230Vac track connector

450 gr


Altamente riciclabile
Highly recyclable

■ SATURNO B

	20W 220-240Vac	25W 220-240Vac	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	2100lm	2400lm				
[1] 12° Lens	7Q4460. _ _ _ _	7Q4461. _ _ _ _	<ul style="list-style-type: none"> S RAL 9010 Warm white 7 RAL 9003 White A6 RAL 9002 Gray white C RAL 7033 Gothic Cement G3 RAL 7012 Gray G7 RAL 7006 Beige gray M8 RAL 8019 Brown H RAL 9005 Black 	<ul style="list-style-type: none"> U1 2200K CRI > 90 B2 2400K CRI > 90 X 2700K CRI > 90 X1 2700K CRI > 95 6 3000K CRI > 80 W 3000K CRI > 90 W1 3000K CRI > 95 K 3500K CRI > 90 K1 3500K CRI > 95 D 4000K CRI > 90 	<ul style="list-style-type: none"> 1 Cromo Lucido Shiny Chrome I Oro Lucido Gold Chrome 8 Oro Satinato Satin Gold N Nichel Satinato Satin Nickel 4 Nero - Black 	<ul style="list-style-type: none"> W Senza Filtro Without Filter E Filtro Ellittico Elliptical Filter H Nido D'ape Hex Louver P Filtro Prismatico Prismatic Filter S Filtro Correttivo Softening Lens

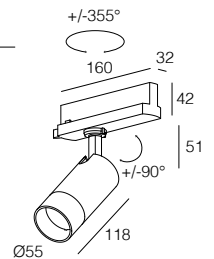
ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES[1]
Lente 12° non intercambiabile
12° Lens not interchangeableLenti
LensesFiltri ottici
Optical filtersAnelli porta filtro
Filter holder ringsAnelli decorativi
Decorative ringsBinari 230Vac e accessori
230Vac tracks and accessories

pag. 50

EXAMPLE CODE COMPOSITION
123456.





























DGA


SATURNO B DALI

-  IP40
-  Class II
-  Binario a parete, soffitto
Wall, ceiling mounting track
-  Fornito con attacco a binario 230Vac
Provided with 230Vac track connector
-  450 gr
-  Altamente riciclabile
Highly recyclable



SATURNO B DALI

	20W 220-240Vac	25W 220-240Vac	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	2100lm	2400lm				
[1]  12° Lens	7Q4481. _ _ _ _	7Q4482. _ _ _ _	 S RAL 9010 Warm white	 U1 2200K CRI > 90	 1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
 18° Lens	784481. _ _ _ _	784482. _ _ _ _	 7 RAL 9003 White	 B2 2400K CRI > 90	 I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
 24° Lens	7G4481. _ _ _ _	7G4482. _ _ _ _	 A6 RAL 9002 Gray white	 X 2700K CRI > 90	 8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
 33° Lens	7E4481. _ _ _ _	7E4482. _ _ _ _	 C RAL 7033 Gothic Cement	 X1 2700K CRI > 95	 N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
 52° Lens	754481. _ _ _ _	754482. _ _ _ _	 G3 RAL 7012 Gray	 6 3000K CRI > 80	 4 Nero - Black	S Filtro Correttivo Softening Lens
			 G7 RAL 7006 Beige gray	 W 3000K CRI > 90		
			 M8 RAL 8019 Brown	 W1 3000K CRI > 95		
			 H RAL 9005 Black	 K 3500K CRI > 90		
				 K1 3500K CRI > 95		
				 D 4000K CRI > 90		

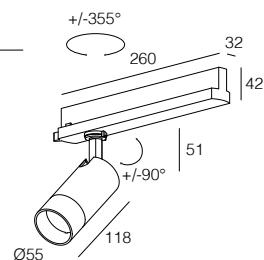

ACCESSORI INTERCAMBIABILI INTERCHANGEABLE ACCESSORIES


[1] Lente 12° non intercambiabile
12° Lens not interchangeable

Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Lente 18° 18° Lens A01196.80	 Filtro Ellittico Elliptical Filter A01186.80	 Cromo Lucido Shiny Chrome A01273.10	 Cromo Lucido Shiny Chrome A01191.10
 Lente 24° 24° Lens A01197.80	 Filtro Nido d'ape Hex Louver A01187.40	 Oro Lucido Gold Chrome A01273.10	 Oro Lucido Gold Chrome A01191.10
 Lente 33° 33° Lens A01198.80	 Filtro Prismatico Prismatic Filter A01188.80	 Oro Satinato Satin Gold A01273.80	 Oro Satinato Satin Gold A01191.80
 Lente 52° 52° Lens A01199.80	 Filtro Correttivo Softening Lens A01189.80	 Nichel Satinato Satin Nickel A01273.N0	 Nichel Satinato Satin Nickel A01191.N0
		 Nero Black A01273.40	 Nero Black A01191.40



Binari 230Vac e accessori
230Vac tracks and accessories

EXAMPLE CODE COMPOSITION



DGA

SATURNO BF



IP40



Class II


Binario a parete, soffitto
Wall, ceiling mounting trackFornito con attacco a filo per binario 230Vac
Supplied with adaptor flush to 230Vac track

430 gr

Altamente riciclabile
Highly recyclable

SATURNO BF


	20W 220-240Vac	25W 220-240Vac	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	2100lm	2400lm				
[1] 12° Lens	7Q4483.____	7Q4484.____	<ul style="list-style-type: none"> S RAL 9010 Warm white 7 RAL 9003 White A6 RAL 9002 Gray white C RAL 7033 Gothic Cement G3 RAL 7012 Gray G7 RAL 7006 Beige gray M8 RAL 8019 Brown H RAL 9005 Black 	<ul style="list-style-type: none"> U1 2200K CRI > 90 B2 2400K CRI > 90 X 2700K CRI > 90 X1 2700K CRI > 95 6 3000K CRI > 80 W 3000K CRI > 90 W1 3000K CRI > 95 K 3500K CRI > 90 K1 3500K CRI > 95 D 4000K CRI > 90 	<ul style="list-style-type: none"> 1 Cromo Lucido Shiny Chrome I Oro Lucido Gold Chrome 8 Oro Satinato Satin Gold N Nichel Satinato Satin Nickel 4 Nero - Black 	<ul style="list-style-type: none"> W Senza Filtro Without Filter E Filtro Ellittico Elliptical Filter H Nido D'ape Hex Louver P Filtro Prismatico Prismatic Filter S Filtro Correttivo Softening Lens

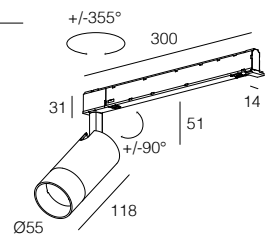ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES

[1]
Lente 12° non intercambiabile
12° Lens not interchangeable

Lenti
LensesFiltri ottici
Optical filtersAnelli porta filtro
Filter holder ringsAnelli decorativi
Decorative ringsBinari 230Vac per Saturno BF
230Vac tracks for Saturno BF

pag. 54

EXAMPLE CODE COMPOSITION
123456.




SATURNO BF DALI

- IP40
- Class II
- Binario a parete, soffitto
Wall, ceiling mounting track
- Fornito con attacco a filo per binario 230Vac
Supplied with adaptor flush to 230Vac track
- 445 gr
- Altamente riciclabile
Highly recyclable



SATURNO BF DALI

	20W 220-240Vac	25W 220-240Vac	Finiture modulo Module finishes	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	2100lm	2400lm				
[1] 12° Lens	7Q4459.____	7Q4420.____	S RAL 9010 Warm white	U1 2200K CRI > 90	1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter
18° Lens	784459.____	784420.____	7 RAL 9003 White	B2 2400K CRI > 90	I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter
24° Lens	7G4459.____	7G4420.____	A6 RAL 9002 Gray white	X 2700K CRI > 90	8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver
33° Lens	7E4459.____	7E4420.____	C RAL 7033 Gothic Cement	X1 2700K CRI > 95	N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter
52° Lens	754459.____	754420.____	G3 RAL 7012 Gray	6 3000K CRI > 80	4 Nero - Black	S Filtro Correttivo Softening Lens
			G7 RAL 7006 Beige gray	W 3000K CRI > 90		
			M8 RAL 8019 Brown	W1 3000K CRI > 95		
			H RAL 9005 Black	K 3500K CRI > 90		
				K1 3500K CRI > 95		
				D 4000K CRI > 90		

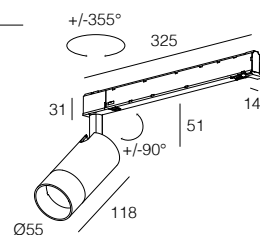

ACCESSORI INTERCAMBIABILI INTERCHANGEABLE ACCESSORIES


[1] Lente 12° non intercambiabile
12° Lens not interchangeable

Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
Lente 18° 18° Lens A01196.80	Filtro Ellittico Elliptical Filter A01186.80	Cromo Lucido Shiny Chrome A01273.10	Cromo Lucido Shiny Chrome A01191.10
Lente 24° 24° Lens A01197.80	Filtro Nido d'ape Hex Louver A01187.40	Oro Lucido Gold Chrome A01273.10	Oro Lucido Gold Chrome A01191.10
Lente 33° 33° Lens A01198.80	Filtro Prismatico Prismatic Filter A01188.80	Oro Satinato Satin Gold A01273.80	Oro Satinato Satin Gold A01191.80
Lente 52° 52° Lens A01199.80	Filtro Correttivo Softening Lens A01189.80	Nichel Satinato Satin Nickel A01273.N0	Nichel Satinato Satin Nickel A01191.N0
		Nero Black A01273.40	Nero Black A01191.40



Binari 230Vac per Saturno BF Dali
230Vac tracks for Saturno BF Dali pag. 54

EXAMPLE CODE COMPOSITION














DGA

OUTDOOR ▲

DGA





















ARIEL i IP67


SOLOVETRO

-  IP67
-  Class III
-  Incasso a parete, pavimento
Wall, floor recessed
-  WIPS - Water Infiltration Protection System
-  Carrabile 2000 kg
Drive over up to 2000 kg
-  Installazione con controcassa obbligatoria
Mandatory installation with recessed box
-  Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
-  Collegare in serie 500mA
Connect in series at 500mA
-  420 gr
-  Altamente riciclabile
Highly recyclable
-  LED intercambiabile Plug&Play
Plug&Play interchangeable LED























ARIEL i IP67 SOLOVETRO

	9W 500mA	Finiture Finish	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	550lm				
[1]  14° Lens	7Q4547._ _ _ _	 3 Grigio - Gray  4 Nero - Black  Z Champagne Gold	 U1 2200K CRI > 90  B2 2400K CRI > 90  X 2700K CRI > 90  6 3000K CRI > 80  W 3000K CRI > 90  K 3500K CRI > 90  D 4000K CRI > 90	 1 Cromo Lucido Shiny Chrome  I Oro Lucido Gold Chrome  8 Oro Satinato Satin Gold  N Nichel Satinato Satin Nickel  4 Nero - Black	W Senza Filtro Without Filter E Filtro Ellittico Elliptical Filter P Filtro Prismatico Prismatic Filter S Filtro Correttivo Softening Lens
 18° Lens	784547._ _ _ _				
 24° Lens	7G4547._ _ _ _				
 33° Lens	7E4547._ _ _ _				
 52° Lens	754547._ _ _ _				



ARIEL i IP67 SOLOVETRO

PLUG & PLAY

	9W 500mA	Finiture Finish	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	550lm				
[1]  14° Lens	7Q4548._ _ _ _	 3 Grigio - Gray  4 Nero - Black  Z Champagne Gold	 U1 2200K CRI > 90  B2 2400K CRI > 90  X 2700K CRI > 90  6 3000K CRI > 80  W 3000K CRI > 90  K 3500K CRI > 90  D 4000K CRI > 90	 1 Cromo Lucido Shiny Chrome  I Oro Lucido Gold Chrome  8 Oro Satinato Satin Gold  N Nichel Satinato Satin Nickel  4 Nero - Black	W Senza Filtro Without Filter E Filtro Ellittico Elliptical Filter P Filtro Prismatico Prismatic Filter S Filtro Correttivo Softening Lens
 18° Lens	784548._ _ _ _				
 24° Lens	7G4548._ _ _ _				
 33° Lens	7E4548._ _ _ _				
 52° Lens	754548._ _ _ _				

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

500mA CC20-F-500-N pag. 63

ACCESSORI
ACCESSORIES



Controcassa in alluminio con bordo
Recessed box in aluminum with edge

A01415_0
FINISH
Ø 62 mm




Controcassa in alluminio con tappo
Recessed box in aluminum with closure cap

A01414.40



Connettore stagno
Wateright connector
A00387.40

EXAMPLE CODE COMPOSITION
123456.




















DGA

ARIEL i IP67 SOLOVETRO

ARIEL i IP67 SOLOVETRO

ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES

[1] Lente 14° non intercambiabile
14° Lens not interchangeable

























Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Lente 18° 18° Lens A01192.80	 Filtro Ellittico Elliptical Filter A01182.80	 Cromo Lucido Shiny Chrome A01272.10	 Cromo Lucido Shiny Chrome A01190.10
 Lente 24° 24° Lens A01193.80	 Filtro Prismatico Prismatic Filter A01184.80	 Oro Lucido Gold Chrome A01272.10	 Oro Lucido Gold Chrome A01190.10
 Lente 33° 33° Lens A01194.80	 Filtro Correttivo Softening Lens A01185.80	 Oro Satinato Satin Gold A01272.80	 Oro Satinato Satin Gold A01190.80
 Lente 52° 52° Lens A01195.80		 Nichel Satinato Satin Nickel A01272.N0	 Nichel Satinato Satin Nickel A01190.N0
		 Nero Black A01272.40	 Nero Black A01190.40

ARIEL i IP67 SOLOVETRO PLUG&PLAY

ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES

[1] Lente 14° non intercambiabile
14° Lens not interchangeable












[2] Modulo plug&play per lente 14°
14° lens for plug&play module

Modulo 9W PLUG&PLAY	Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Modulo 2200K CRI > 90 A01413.4U1 A01443.4U1 [2]	 Lente 18° 18° Lens A01192.80	 Filtro Ellittico Elliptical Filter A01182.80	 Cromo Lucido Shiny Chrome A01272.10	 Cromo Lucido Shiny Chrome A01190.10
 Modulo 2400K CRI > 90 A01413.4B2 A01443.4B2 [2]	 Lente 24° 24° Lens A01193.80	 Filtro Prismatico Prismatic Filter A01184.80	 Oro Lucido Gold Chrome A01272.10	 Oro Lucido Gold Chrome A01190.10
 Modulo 2700K CRI > 90 A01413.4X A01443.4X [2]	 Lente 33° 33° Lens A01194.80	 Filtro Correttivo Softening Lens A01185.80	 Oro Satinato Satin Gold A01272.80	 Oro Satinato Satin Gold A01190.80
 Modulo 3000K CRI > 80 A01413.46 A01443.46 [2]	 Lente 52° 52° Lens A01195.80		 Nichel Satinato Satin Nickel A01272.N0	 Nichel Satinato Satin Nickel A01190.N0
 Modulo 3000K CRI > 90 A01413.4W A01443.4W [2]			 Nero Black A01272.40	 Nero Black A01190.40
 Modulo 3500K CRI > 90 A01413.4K A01443.4K [2]				
 Modulo 4000K CRI > 90 A01413.4D A01443.4D [2]				

DGA





















SATURNO i IP67


SOLOVETRO

-  IP67
-  Class III
-  Incasso a parete, pavimento
Wall, floor recessed
-  WIPS - Water Infiltration Protection System
-  Carrabile 2000 kg
Drive over up to 2000 kg
-  Installazione con controcassa obbligatoria
Mandatory installation with recessed box
-  Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
-  Collegare in serie 350mA
Connect in series at 350mA
-  770 gr
-  Altamente riciclabile
Highly recyclable
-  LED intercambiabile Plug&Play
Plug&Play interchangeable LED























SATURNO i IP67 SOLOVETRO

	12W 350mA	Finiture Finish	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	920lm				
[1]  12° Lens	7Q4562._ _ _ _	 3 Grigio - Gray  4 Nero - Black  Z Champagne Gold	 U1 2200K CRI > 90  B2 2400K CRI > 90  X 2700K CRI > 90  6 3000K CRI > 80  W 3000K CRI > 90  K 3500K CRI > 90  D 4000K CRI > 90	 1 Cromo Lucido Shiny Chrome  I Oro Lucido Gold Chrome  8 Oro Satinato Satin Gold  N Nichel Satinato Satin Nickel  4 Nero - Black	W Senza Filtro Without Filter E Filtro Ellittico Elliptical Filter P Filtro Prismatico Prismatic Filter S Filtro Correttivo Softening Lens
 18° Lens	784562._ _ _ _				
 24° Lens	7G4562._ _ _ _				
 33° Lens	7E4562._ _ _ _				
 52° Lens	754562._ _ _ _				



SATURNO i IP67 SOLOVETRO

PLUG & PLAY

	12W 350mA	Finiture Finish	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	920lm				
[1]  12° Lens	7Q4559._ _ _ _	 3 Grigio - Gray  4 Nero - Black  Z Champagne Gold	 U1 2200K CRI > 90  B2 2400K CRI > 90  X 2700K CRI > 90  6 3000K CRI > 80  W 3000K CRI > 90  K 3500K CRI > 90  D 4000K CRI > 90	 1 Cromo Lucido Shiny Chrome  I Oro Lucido Gold Chrome  8 Oro Satinato Satin Gold  N Nichel Satinato Satin Nickel  4 Nero - Black	W Senza Filtro Without Filter E Filtro Ellittico Elliptical Filter P Filtro Prismatico Prismatic Filter S Filtro Correttivo Softening Lens
 18° Lens	784559._ _ _ _				
 24° Lens	7G4559._ _ _ _				
 33° Lens	7E4559._ _ _ _				
 52° Lens	754559._ _ _ _				

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

350mA CC20-F-350-N pag. 58

ACCESSORI
ACCESSORIES



Controcassa in alluminio con bordo
Recessed box in aluminum with edge

A01418._0

FINISH
Ø 83 mm



Controcassa in alluminio con tappo
Recessed box in aluminum with closure cap


A01446.40



Connettore stagno
Wateright connector

A00387.40

EXAMPLE CODE COMPOSITION
123456.






















SATURNO i IP67 SOLOVETRO

SATURNO i IP67 SOLOVETRO

ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES

[1] Lente 12° non intercambiabile
12° Lens not interchangeable



















Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Lente 18° 18° Lens A01196.80	 Filtro Ellittico Elliptical Filter A01186.80	 Cromo Lucido Shiny Chrome A01273.10	 Cromo Lucido Shiny Chrome A01191.10
 Lente 24° 24° Lens A01197.80	 Filtro Prismatico Prismatic Filter A01188.80	 Oro Lucido Gold Chrome A01273.10	 Oro Lucido Gold Chrome A01191.10
 Lente 33° 33° Lens A01198.80	 Filtro Correttivo Softening Lens A01189.80	 Oro Satinato Satin Gold A01273.80	 Oro Satinato Satin Gold A01191.80
 Lente 52° 52° Lens A01199.80		 Nichel Satinato Satin Nickel A01273.N0	 Nichel Satinato Satin Nickel A01191.N0
		 Nero Black A01273.40	 Nero Black A01191.40

SATURNO i IP67 SOLOVETRO PLUG&PLAY

ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES

[1] Lente 12° non intercambiabile
12° Lens not interchangeable













[2] Modulo plug&play per lente 12°
12° lens for plug&play module

Modulo 12W PLUG&PLAY	Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Modulo 2200K CRI > 90 A01304.4U1 A01442.4U1 [2]	 Lente 18° 18° Lens A01196.80	 Filtro Ellittico Elliptical Filter A01186.80	 Cromo Lucido Shiny Chrome A01273.10	 Cromo Lucido Shiny Chrome A01191.10
Modulo 2400K CRI > 90 A01304.4B2 A01442.4B2 [2]	 Lente 24° 24° Lens A01197.80	 Filtro Prismatico Prismatic Filter A01188.80	 Oro Lucido Gold Chrome A01273.10	 Oro Lucido Gold Chrome A01191.10
Modulo 2700K CRI > 90 A01304.4X A01442.4X [2]	 Lente 33° 33° Lens A01198.80	 Filtro Correttivo Softening Lens A01189.80	 Oro Satinato Satin Gold A01273.80	 Oro Satinato Satin Gold A01191.80
Modulo 3000K CRI > 80 A01304.46 A01442.46 [2]	 Lente 52° 52° Lens A01199.80		 Nichel Satinato Satin Nickel A01273.N0	 Nichel Satinato Satin Nickel A01191.N0
Modulo 3000K CRI > 90 A01304.4W A01442.4W [2]			 Nero Black A01273.40	 Nero Black A01191.40
Modulo 3500K CRI > 90 A01304.4K A01442.4K [2]				
Modulo 4000K CRI > 90 A01304.4D A01442.4D [2]				

DGA

TRIUUM i IP67







SOLOVETRO


-  IP67
-  Class III 24Vdc
-  Class II 220-240Vac
-  Incasso a pavimento
Floor recessed
-  WIPS - Water Infiltration Protection System
-  Carrabile 2000 kg
Drive over up to 2000 kg
-  Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
-  Collegare in parallelo 24Vdc
Connect in parallel at 24Vdc
-  Alimentazione integrata, collegare alla tensione di rete 220-240Vac
Built-in driver, connect directly to the line voltage to 220-240Vac
-  610 gr
-  Altamente riciclabile
Highly recyclable
-  IK 10



TRIUUM i IP67 SOLOVETRO

24Vdc







	7W 24Vdc	15W 24Vdc	Finiture Finish	Colore LED LED Colour	Filtri ottici Optical filters
Lumen Output 3000K	600lm	1000lm			
 10° Lens	734557._ _ _	734571._ _ _	■ 4 Nero - Black	■ U 2200K ■ Y 2700K ■ 6 3000K ■ W 3000K CRI > 90 ■ J 3500K ■ 9 4000K	W Senza Filtro Without Filter D Frangiluce Louver F Frangiluce Asy Asy Louver
 25° Lens	7G4557._ _ _	7G4571._ _ _			
 40° Lens	744557._ _ _	744571._ _ _			
 60° Lens	754557._ _ _	754571._ _ _			
 Lente ellittica Elliptical lens	774557._ _ _	774571._ _ _			
 Wall Washer	7W4557._ _ W				




[1] 2200K
Disponibile solo per la
versione 7W
Available on the 7W
power version only

TRIUUM i IP67 SOLOVETRO

220-240Vac

	8W 220-240Vac	Finiture Finish	Colore LED LED Colour	Filtri ottici Optical filters
Lumen Output 3000K	600lm			
 10° Lens	734579._ _ _	■ 4 Nero - Black	■ U 2200K ■ Y 2700K ■ 6 3000K ■ W 3000K CRI > 90 ■ J 3500K ■ 9 4000K	W Senza Filtro Without Filter D Frangiluce Louver F Frangiluce Asy Asy Louver
 25° Lens	7G4579._ _ _			
 40° Lens	744579._ _ _			
 60° Lens	754579._ _ _			
 Lente ellittica Elliptical lens	774579._ _ _			
 Wall Washer	7W4579._ _ W			



[1] 2200K
Disponibile solo per la
versione 7W
Available on the 7W
power version only

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

24Vdc CC20-F-24-N pag. 72

ACCESSORI
ACCESSORIES



Controcassa in acciaio
Stainless Steel recessed box
TRIUUM i IP67 SOLOVETRO
24V
A01411.60



Controcassa in acciaio
Stainless Steel recessed box
TRIUUM i IP67 SOLOVETRO
220-240Vac
A01476.60



Accessorio per
estrazione
Removing tool
A01478.H0

24Vdc



Micro connettore
stagno
Micro watertight
connector
A00357.40


220-240Vac



Connettore
stagno
Watertight
connector
A01023.40

EXAMPLE CODE COMPOSITION

123456.



DRAFT

DGA

TRIUUM i IP67


- IP67
- Class III 24Vdc
- Class II 220-240Vac
- Incasso a pavimento
Floor recessed
- WIPS - Water Infiltration Protection System
- Carrabile 2000 kg
Drive over up to 2000 kg
- Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
- Collegare in parallelo 24Vdc
Connect in parallel at 24Vdc
- Alimentazione integrata, collegare alla tensione di rete 220-240Vac
Built-in driver, connect directly to the line voltage to 220-240Vac
- 600 gr
- Altamente riciclabile
Highly recyclable



TRIUUM i IP67

24Vdc


	7W 24Vdc	15W 24Vdc	Finitura flangia Bezel finish	Colore LED LED Colour	Filtri ottici Optical filters
Lumen Output 3000K	600lm	1000lm			
10° Lens	734556. _ _ _	734570. _ _ _	6S Acciaio Inox Satinato Brushed Stainless Steel AISI 316L	U 2200K [1]	W Senza Filtro Without Filter
25° Lens	7G4556. _ _ _	7G4570. _ _ _		Y 2700K	D Frangiluce Louwer
40° Lens	744556. _ _ _	744570. _ _ _		6 3000K	F Frangiluce Asy Asy Louwer
60° Lens	754556. _ _ _	754570. _ _ _		W 3000K CRI > 90	
Lente ellittica Elliptical lens	774556. _ _ _	774570. _ _ _		J 3500K	
Wall Washer	7W4556. _ _ W			9 4000K	



TRIUUM i IP67

220-240Vac

	8W 220-240Vac	Finitura flangia Bezel finish	Colore LED LED Colour	Filtri ottici Optical filters
Lumen Output 3000K	600lm			
10° Lens	734576. _ _ _	6S Acciaio Inox Satinato Brushed Stainless Steel AISI 316L	U 2200K [1]	W Senza Filtro Without Filter
25° Lens	7G4576. _ _ _		Y 2700K	D Frangiluce Louwer
40° Lens	744576. _ _ _		6 3000K	F Frangiluce Asy Asy Louwer
60° Lens	754576. _ _ _		W 3000K CRI > 90	
Lente ellittica Elliptical lens	774576. _ _ _		J 3500K	
Wall Washer	7W4576. _ _ W		9 4000K	



ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

24Vdc CC20-F-24-N pag. 72

ACCESSORI
ACCESSORIES



Controcassa in acciaio
Stainless Steel recessed box
TRIUUM i IP67
24V
A01412.60



Controcassa in acciaio
Stainless Steel recessed box
TRIUUM i IP67
220-240Vac
A01477.60



Accessorio per
estrazione
Removing tool
A01478.H0

24Vdc



Micro connettore
stagno
Micro watertight
connector
A00357.40


220-240Vac



Connettore
stagno
Watertight
connector
A01023.40

EXAMPLE CODE COMPOSITION

123456.






ARIEL i IP67



- IP67
- Class III
- Incasso a parete, pavimento
Wall, floor recessed
- WIPS - Water Infiltration Protection System
- Carrabile 2000 kg
Drive over up to 2000 kg
- Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
- Collegare in serie 500mA
Connect in series at 500mA
- 400 gr
- Altamente riciclabile
Highly recyclable
- LED intercambiabile Plug&Play
Plug&Play interchangeable LED

ARIEL i IP67

	9W 500mA	Finitura flangia Bezel finish	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	750lm				
[1] 14° Lens	7Q4549._ _ _ _	3 Grigio - Gray 4 Nero - Black 6 Acciaio Inox Stainless Steel AISI 316L	U1 2200K CRI > 90 B2 2400K CRI > 90 X 2700K CRI > 90 6 3000K CRI > 80 W 3000K CRI > 90 K 3500K CRI > 90 D 4000K CRI > 90	1 Cromo Lucido Shiny Chrome I Oro Lucido Gold Chrome 8 Oro Satinato Satin Gold N Nichel Satinato Satin Nickel 4 Nero - Black	W Senza Filtro Without Filter E Filtro Ellittico Elliptical Filter H Nido D'ape Hex Louver P Filtro Prismatico Prismatic Filter S Filtro Correttivo Softening Lens
18° Lens	784549._ _ _ _				
24° Lens	7G4549._ _ _ _				
33° Lens	7E4549._ _ _ _				
52° Lens	754549._ _ _ _				



ARIEL i IP67 PLUG & PLAY

	9W 500mA	Finitura flangia Bezel finish	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	750lm				
[1] 14° Lens	7Q4550._ _ _ _	3 Grigio - Gray 4 Nero - Black 6 Acciaio Inox Stainless Steel AISI 316L	U1 2200K CRI > 90 B2 2400K CRI > 90 X 2700K CRI > 90 6 3000K CRI > 80 W 3000K CRI > 90 K 3500K CRI > 90 D 4000K CRI > 90	1 Cromo Lucido Shiny Chrome I Oro Lucido Gold Chrome 8 Oro Satinato Satin Gold N Nichel Satinato Satin Nickel 4 Nero - Black	W Senza Filtro Without Filter E Filtro Ellittico Elliptical Filter H Nido D'ape Hex Louver P Filtro Prismatico Prismatic Filter S Filtro Correttivo Softening Lens
18° Lens	784550._ _ _ _				
24° Lens	7G4550._ _ _ _				
33° Lens	7E4550._ _ _ _				
52° Lens	754550._ _ _ _				

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

500mA CC20-F-500-N pag. 63


ACCESSORI
ACCESSORIES




Controcassa
Recessed box
A01416.40



Connettore stagno
Watertight connector
A00387.40



EXAMPLE CODE COMPOSITION
123456.











DGA

ARIEL i IP67

ARIEL i IP67

ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES

[1] Lente 14° non intercambiabile
14° Lens not interchangeable


























Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Lente 18° 18° Lens A01192.80	 Filtro Ellittico Elliptical Filter A01182.80	 Cromo Lucido Shiny Chrome A01272.10	 Cromo Lucido Shiny Chrome A01190.10
 Lente 24° 24° Lens A01193.80	 Filtro Nido d'ape Hex Louver A01183.40	 Oro Lucido Gold Chrome A01272.10	 Oro Lucido Gold Chrome A01190.10
 Lente 33° 33° Lens A01194.80	 Filtro Prismatico Prismatic Filter A01184.80	 Oro Satinato Satin Gold A01272.80	 Oro Satinato Satin Gold A01190.80
 Lente 52° 52° Lens A01195.80	 Filtro Correttivo Softening Lens A01185.80	 Nichel Satinato Satin Nickel A01272.N0	 Nichel Satinato Satin Nickel A01190.N0
		 Nero Black A01272.40	 Nero Black A01190.40

ARIEL i IP67 PLUG&PLAY

ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES

[1] Lente 14° non intercambiabile
14° Lens not interchangeable

[2] Modulo plug&play per lente 14°
14° lens for plug&play module

Modulo 9W PLUG&PLAY	Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Modulo 2200K CRI > 90 A01413.4U1 A01443.4U1 [2]	 Lente 18° 18° Lens A01192.80	 Filtro Ellittico Elliptical Filter A01182.80	 Cromo Lucido Shiny Chrome A01272.10	 Cromo Lucido Shiny Chrome A01190.10
 Modulo 2400K CRI > 90 A01413.4B2 A01443.4B2 [2]	 Lente 24° 24° Lens A01193.80	 Filtro Nido d'ape Hex Louver A01183.40	 Oro Lucido Gold Chrome A01272.10	 Oro Lucido Gold Chrome A01190.10
 Modulo 2700K CRI > 90 A01413.4X A01443.4X [2]	 Lente 33° 33° Lens A01194.80	 Filtro Prismatico Prismatic Filter A01184.80	 Oro Satinato Satin Gold A01272.80	 Oro Satinato Satin Gold A01190.80
 Modulo 3000K CRI > 80 A01413.46 A01443.46 [2]	 Lente 52° 52° Lens A01195.80	 Filtro Correttivo Softening Lens A01185.80	 Nichel Satinato Satin Nickel A01272.N0	 Nichel Satinato Satin Nickel A01190.N0
 Modulo 3000K CRI > 90 A01413.4W A01443.4W [2]			 Nero Black A01272.40	 Nero Black A01190.40
 Modulo 3500K CRI > 90 A01413.4K A01443.4K [2]				
 Modulo 4000K CRI > 90 A01413.4D A01443.4D [2]				




SATURNO i IP67



- IP67
- Class III
- Incasso a parete, pavimento
Wall, floor recessed
- WIPS - Water Infiltration Protection System
- Carrabile 2000 kg
Drive over up to 2000 kg
- Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
- Collegare in serie 350mA
Connect in series at 350mA
- 720 gr
- Altamente riciclabile
Highly recyclable
- LED intercambiabile Plug&Play
Plug&Play interchangeable LED

SATURNO i IP67

	12W 350mA	Finitura flangia Bezel finish	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	1200lm				
[1] 12° Lens	7Q4553. _ _ _ _	<ul style="list-style-type: none"> 3 Grigio - Gray 4 Nero - Black 6 Acciaio Inox Stainless Steel AISI 316L 	<ul style="list-style-type: none"> U1 2200K CRI > 90 B2 2400K CRI > 90 X 2700K CRI > 90 6 3000K CRI > 80 W 3000K CRI > 90 K 3500K CRI > 90 D 4000K CRI > 90 	<ul style="list-style-type: none"> 1 Cromo Lucido Shiny Chrome I Oro Lucido Gold Chrome 8 Oro Satinato Satin Gold N Nichel Satinato Satin Nickel 4 Nero - Black 	<ul style="list-style-type: none"> W Senza Filtro Without Filter E Filtro Ellittico Elliptical Filter H Nido D'ape Hex Louver P Filtro Prismatico Prismatic Filter S Filtro Correttivo Softening Lens
18° Lens	784553. _ _ _ _				
24° Lens	7G4553. _ _ _ _				
33° Lens	7E4553. _ _ _ _				
52° Lens	754553. _ _ _ _				



SATURNO i IP67

PLUG & PLAY

	12W 350mA	Finitura flangia Bezel finish	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters
Lumen Output 3000K	1200lm				
[1] 12° Lens	7Q4554. _ _ _ _	<ul style="list-style-type: none"> 3 Grigio - Gray 4 Nero - Black 6 Acciaio Inox Stainless Steel AISI 316L 	<ul style="list-style-type: none"> U1 2200K CRI > 90 B2 2400K CRI > 90 X 2700K CRI > 90 6 3000K CRI > 80 W 3000K CRI > 90 K 3500K CRI > 90 D 4000K CRI > 90 	<ul style="list-style-type: none"> 1 Cromo Lucido Shiny Chrome I Oro Lucido Gold Chrome 8 Oro Satinato Satin Gold N Nichel Satinato Satin Nickel 4 Nero - Black 	<ul style="list-style-type: none"> W Senza Filtro Without Filter E Filtro Ellittico Elliptical Filter H Nido D'ape Hex Louver P Filtro Prismatico Prismatic Filter S Filtro Correttivo Softening Lens
18° Lens	784554. _ _ _ _				
24° Lens	7G4554. _ _ _ _				
33° Lens	7E4554. _ _ _ _				
52° Lens	754554. _ _ _ _				

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

350mA CC20-F-350-N pag. 58


ACCESSORI
ACCESSORIES




Controcassa
Recessed box
A01417.40



Connettore stagno
Watertight connector
A00387.40



EXAMPLE CODE COMPOSITION
123456.





















DGA

SATURNO i IP67

SATURNO i IP67

ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES

[1] Lente 12° non intercambiabile
12° Lens not interchangeable

Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Lente 18° 18° Lens A01196.80	 Filtro Ellittico Elliptical Filter A01186.80	 Cromo Lucido Shiny Chrome A01273.10	 Cromo Lucido Shiny Chrome A01191.10
 Lente 24° 24° Lens A01197.80	 Filtro Nido d'ape Hex Louver A01187.40	 Oro Lucido Gold Chrome A01273.10	 Oro Lucido Gold Chrome A01191.10
 Lente 33° 33° Lens A01198.80	 Filtro Prismatico Prismatic Filter A01188.80	 Oro Satinato Satin Gold A01273.80	 Oro Satinato Satin Gold A01191.80
 Lente 52° 52° Lens A01199.80	 Filtro Correttivo Softening Lens A01189.80	 Nichel Satinato Satin Nickel A01273.N0	 Nichel Satinato Satin Nickel A01191.N0
		 Nero Black A01273.40	 Nero Black A01191.40




















SATURNO i IP67

PLUG&PLAY

ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES









[1] Lente 12° non intercambiabile
12° Lens not interchangeable


[2] Modulo plug&play per lente 12°
12° lens for plug&play module

Modulo 12W PLUG&PLAY	Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Modulo 2200K CRI > 90 A01304.4U1 A01442.4U1 [2]	 Lente 18° 18° Lens A01196.80	 Filtro Ellittico Elliptical Filter A01186.80	 Cromo Lucido Shiny Chrome A01273.10	 Cromo Lucido Shiny Chrome A01191.10
Modulo 2400K CRI > 90 A01304.4B2 A01442.4B2 [2]	 Lente 24° 24° Lens A01197.80	 Filtro Nido d'ape Hex Louver A01187.40	 Oro Lucido Gold Chrome A01273.10	 Oro Lucido Gold Chrome A01191.10
Modulo 2700K CRI > 90 A01304.4X A01442.4X [2]	 Lente 33° 33° Lens A01198.80	 Filtro Prismatico Prismatic Filter A01188.80	 Oro Satinato Satin Gold A01273.80	 Oro Satinato Satin Gold A01191.80
Modulo 3000K CRI > 80 A01304.46 A01442.46 [2]	 Lente 52° 52° Lens A01199.80	 Filtro Correttivo Softening Lens A01189.80	 Nichel Satinato Satin Nickel A01273.N0	 Nichel Satinato Satin Nickel A01191.N0
Modulo 3000K CRI > 90 A01304.4W A01442.4W [2]			 Nero Black A01273.40	 Nero Black A01191.40
Modulo 3500K CRI > 90 A01304.4K A01442.4K [2]				
Modulo 4000K CRI > 90 A01304.4D A01442.4D [2]				

DGA

LUI IP67 SOLOVETRO

-  IP67
-  Class III
-  Incasso a parete
Wall recessed
-  WIPS - Water Infiltration Protection System
-  Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
-  Collegare in serie 350mA o 500mA
Connect in series at 350mA or 500mA
-  115 gr
-  Altamente riciclabile
Highly recyclable

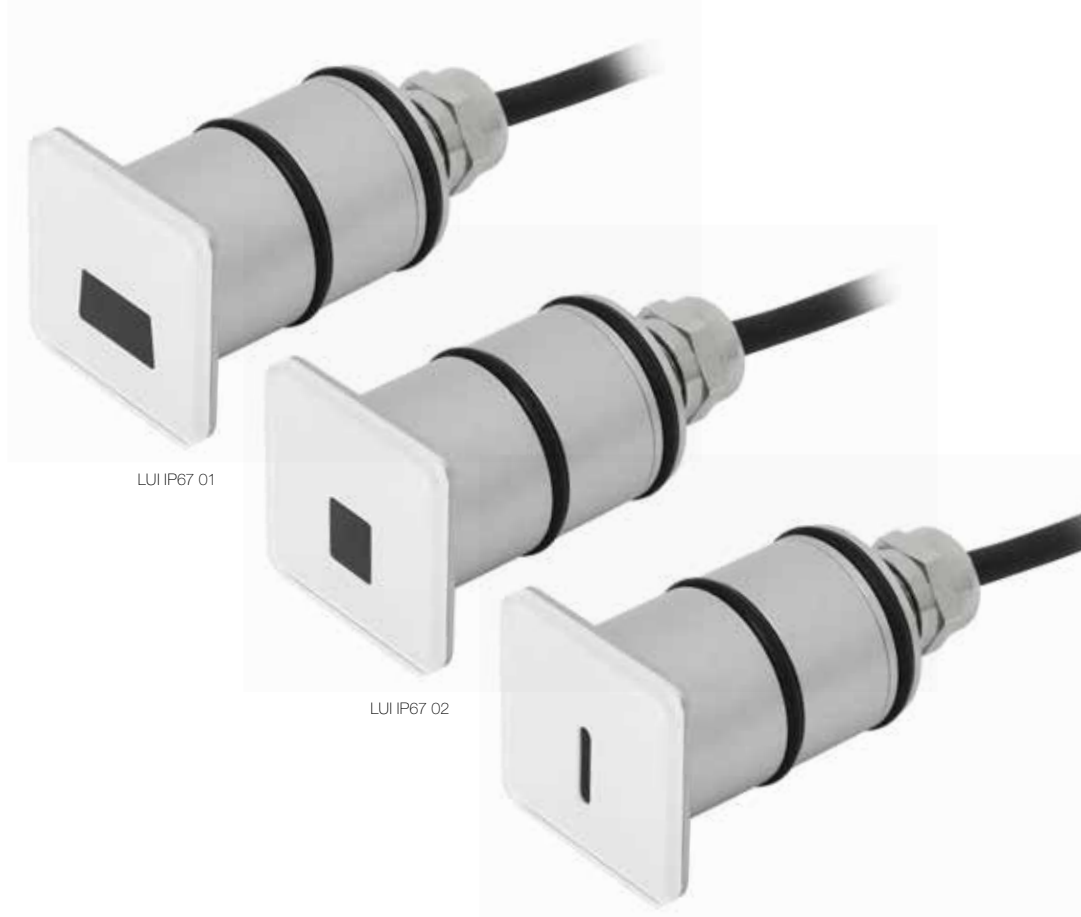


LUI IP67 01

LUI IP67 02

LUI IP67 03


LUI IP67 SOLOVETRO 01

	1W 350mA	2W 500mA	Finiture Finish	Colore LED LED Colour																
Lumen Output 3000K	15lm	20lm																		
 45° Emission	724585. __	724586. __	<table border="0"> <tr> <td></td> <td>3 Grigio - Gray</td> <td></td> <td>U 2200K</td> </tr> <tr> <td></td> <td>4 Nero - Black</td> <td></td> <td>Y 2700K</td> </tr> <tr> <td></td> <td>7 Bianco - White</td> <td></td> <td>6 3000K</td> </tr> <tr> <td></td> <td></td> <td></td> <td>9 4000K</td> </tr> </table>		3 Grigio - Gray		U 2200K		4 Nero - Black		Y 2700K		7 Bianco - White		6 3000K				9 4000K	
	3 Grigio - Gray		U 2200K																	
	4 Nero - Black		Y 2700K																	
	7 Bianco - White		6 3000K																	
			9 4000K																	




LUI IP67 SOLOVETRO 02

	1W 350mA	2W 500mA	Finiture Finish	Colore LED LED Colour																
Lumen Output 3000K	15lm	20lm																		
 45° Emission	724587. __	724588. __	<table border="0"> <tr> <td></td> <td>3 Grigio - Gray</td> <td></td> <td>U 2200K</td> </tr> <tr> <td></td> <td>4 Nero - Black</td> <td></td> <td>Y 2700K</td> </tr> <tr> <td></td> <td>7 Bianco - White</td> <td></td> <td>6 3000K</td> </tr> <tr> <td></td> <td></td> <td></td> <td>9 4000K</td> </tr> </table>		3 Grigio - Gray		U 2200K		4 Nero - Black		Y 2700K		7 Bianco - White		6 3000K				9 4000K	
	3 Grigio - Gray		U 2200K																	
	4 Nero - Black		Y 2700K																	
	7 Bianco - White		6 3000K																	
			9 4000K																	



LUI IP67 SOLOVETRO 03

	1W 350mA	2W 500mA	Finiture Finish	Colore LED LED Colour																
Lumen Output 3000K	15lm	20lm																		
 45° Emission	724589. __	724590. __	<table border="0"> <tr> <td></td> <td>3 Grigio - Gray</td> <td></td> <td>U 2200K</td> </tr> <tr> <td></td> <td>4 Nero - Black</td> <td></td> <td>Y 2700K</td> </tr> <tr> <td></td> <td>7 Bianco - White</td> <td></td> <td>6 3000K</td> </tr> <tr> <td></td> <td></td> <td></td> <td>9 4000K</td> </tr> </table>		3 Grigio - Gray		U 2200K		4 Nero - Black		Y 2700K		7 Bianco - White		6 3000K				9 4000K	
	3 Grigio - Gray		U 2200K																	
	4 Nero - Black		Y 2700K																	
	7 Bianco - White		6 3000K																	
			9 4000K																	



EXAMPLE CODE COMPOSITION
123456.

LED COLOUR
FINISH


ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

ACCESSORI
ACCESSORIES


350mA CC20-F-350-N pag. 58
500mA CC20-F-500-N pag. 63




Controcassa
Recessed box
A01451.40



Controcassa in alluminio con bordo
Recessed box in aluminum with edge
A01450.0




Struttura per incasso a filo
Frame for trimless installation
A01449.30



Fresa a tazza
Hole saw
A00832.H0











Molle di fissaggio
Spring mounting support
A01457.60



DGA


LEI IP67 SOLOVETRO

-  IP67
-  Class III
-  Incasso a parete
Wall recessed
-  WIPS - Water Infiltration Protection System
-  Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
-  Collegare in serie 350mA o 500mA
Connect in series at 350mA or 500mA
-  115 gr
-  Altamente riciclabile
Highly recyclable




LEI IP67 SOLOVETRO 01

	1W 350mA	2W 500mA	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	15lm	25lm		
 45° Emission	724591._._	724592._._	3 Grigio - Gray 4 Nero - Black 7 Bianco - White	U 2200K Y 2700K 6 3000K 9 4000K




LEI IP67 SOLOVETRO 02

	1W 350mA	2W 500mA	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	15lm	25lm		
 45° Emission	724593._._	724594._._	3 Grigio - Gray 4 Nero - Black 7 Bianco - White	U 2200K Y 2700K 6 3000K 9 4000K



LEI IP67 SOLOVETRO 03

	1W 350mA	2W 500mA	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	15lm	25lm		
 45° Emission	724595._._	724596._._	3 Grigio - Gray 4 Nero - Black 7 Bianco - White	U 2200K Y 2700K 6 3000K 9 4000K



EXAMPLE CODE COMPOSITION
123456.

LED COLOUR
FINISH

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

ACCESSORI
ACCESSORIES

350mA **CC20-F-350-N** pag. 58
500mA **CC20-F-500-N** pag. 63







Controcassa
Recessed box
A01451.40

Controcassa in alluminio con bordo
Recessed box in aluminum with edge
A01453._0

Struttura per incasso a filo
Frame for trimless installation
A01452.30

Fresa a tazza
Hole saw
A00832.H0

Molle di fissaggio
Spring mounting support
A01457.60






CONTINUUM i IP67 LOUVER

- IP67
- Class III 24Vdc
- Class II 220-240Vac
- Incasso a pavimento
Floor recessed
- WIPS - Water Infiltration Protection System
- Carrabile 2000 kg
Drive over up to 2000 kg
- Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
- Collegare in parallelo 24Vdc
Connect in parallel at 24Vdc
- Alimentazione integrata, collegare alla tensione di rete 220-240Vac
Built-in driver, connect directly to the line voltage to 220-240Vac
- Altamente riciclabile
Highly recyclable
- IK 10




CONTINUUM i IP67 CON FRANGILUCE - WITH LOUVER


Lumen Output 3000K 1800 lm/m	9W	18W	27W	36W	Finiture Finish	Colore LED LED Colour
	24Vdc	24Vdc	24Vdc	24Vdc		
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm		
10° Lens	734462. __	734463. __	734464. __	734465. __	■ 4 Nero - Black	■ U 2200K ■ Y 2700K ■ 6 3000K ■ W 3000K CRI > 90 ■ 9 4000K ■ 8 DYNAMIC WHITE
25° Lens	7G4462. __	7G4463. __	7G4464. __	7G4465. __		
40° Lens	744462. __	744463. __	744464. __	744465. __		
60° Lens	754462. __	754463. __	754464. __	754465. __		
Lente ellittica Elliptical lens	774462. __	774463. __	774464. __	774465. __		

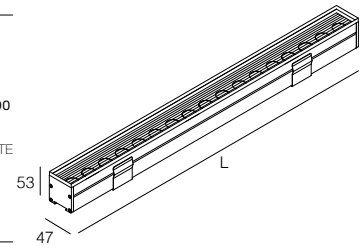

Lumen Output 3000K 1800 lm/m	11W	21W	30W	40W	Finiture Finish	Colore LED LED Colour
	220-240Vac	220-240Vac	220-240Vac	220-240Vac		
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm		
10° Lens	734466. __	734467. __	734468. __	734469. __	■ 4 Nero - Black	■ U 2200K ■ Y 2700K ■ 6 3000K ■ W 3000K CRI > 90 ■ 9 4000K
25° Lens	7G4466. __	7G4467. __	7G4468. __	7G4469. __		
40° Lens	744466. __	744467. __	744468. __	744469. __		
60° Lens	754466. __	754467. __	754468. __	754469. __		
Lente ellittica Elliptical lens	774466. __	774467. __	774468. __	774469. __		

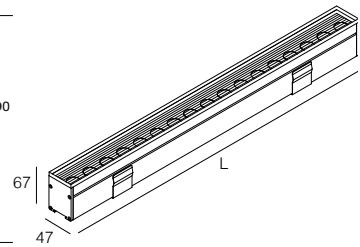

Lumen Output 3000K 1800 lm/m	11W	21W	30W	40W	Finiture Finish	Colore LED LED Colour
	220-240Vac	220-240Vac	220-240Vac	220-240Vac		
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm		
10° Lens	734470. __	734471. __	734472. __	734473. __	■ 4 Nero - Black	■ U 2200K ■ Y 2700K ■ 6 3000K ■ W 3000K CRI > 90 ■ 9 4000K
25° Lens	7G4470. __	7G4471. __	7G4472. __	7G4473. __		
40° Lens	744470. __	744471. __	744472. __	744473. __		
60° Lens	754470. __	754471. __	754472. __	754469. __		
Lente ellittica Elliptical lens	774470. __	774471. __	774472. __	774473. __		

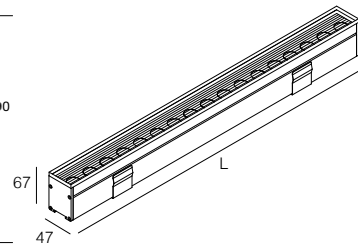

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

24Vdc CV75-F-24-NI
CV100-L-24-NL

pag. 72

ACCESSORI
ACCESSORIES

24Vdc



Micro connettore stagno
Micro watertight connector
A00357.40

220-240Vac



Connettore stagno
Wateright connector
A01023.40

EXAMPLE CODE COMPOSITION
123456.



DGA

CONTINUUM i IP67

LOUVER

CONTROCASSE









RECESSED BOXES



	CONTINUUM i IP67 24Vdc	CONTINUUM i IP67 220-240Vac	MATERIAL	USE WITH
	A01209.60	A01213.60	Acciaio Inox AISI 316L Iron Steel	CONTINUUM i IP67 L = 30 cm
	A01210.60	A01214.60	Acciaio Inox AISI 316L Iron Steel	CONTINUUM i IP67 L = 60 cm
	A01211.60	A01215.60	Acciaio Inox AISI 316L Iron Steel	CONTINUUM i IP67 L = 90 cm
	A01212.60	A01216.60	Acciaio Inox AISI 316L Iron Steel	CONTINUUM i IP67 L = 120 cm
















DGA

MILLI

-  IP67
-  Class III
-  Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting
-  WIPS - Water Infiltration Protection System
-  Cavo in neoprene 200 cm
200 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
-  Collegare in serie 700mA
Connect in series at 700mA
-  40 gr
-  Altamente riciclabile
Highly recyclable



















MILLI

	2,5W 700mA	Finiture Finish	Colore LED LED Colour	Elementi di fissaggio Fixing element
Lumen Output 3000K CRI > 90	120lm			
 10° Lens	734555. _ _ _	<ul style="list-style-type: none">  3 Grigio - Gray  4 Nero - Black  6 Acciaio Inox Stainless Steel AISI 316L  E Ottone Integrale Massive Brass  MS Marrone brillante Bright Brown  VC Verde abete Fir Green 	<ul style="list-style-type: none">  U 2200K  X 2700K CRI > 90  W 3000K CRI > 90  K 3500K CRI > 90  D 4000K CRI > 90 	<ul style="list-style-type: none"> P Applique - Applique K Picchetto - Stake C Cinghia per alberi Tree strap mounting A Picchetto H350 Stake H350 B Paletto H350 Bollard H350
 25° Lens	7G4555. _ _ _			
 40° Lens	744555. _ _ _			
 60° Lens	754555. _ _ _			

MILLI

CON NIDO D'APE - WITH HEX LOUVER

	2,5W 700mA	Finiture Finish	Colore LED LED Colour	Elementi di fissaggio Fixing element
Lumen Output 3000K CRI > 90	120lm			
 10° Lens	734563. _ _ _	<ul style="list-style-type: none">  3 Grigio - Gray  4 Nero - Black  6 Acciaio Inox Stainless Steel AISI 316L  E Ottone Integrale Massive Brass  MS Marrone brillante Bright Brown  VC Verde abete Fir Green 	<ul style="list-style-type: none">  U 2200K  X 2700K CRI > 90  W 3000K CRI > 90  K 3500K CRI > 90  D 4000K CRI > 90 	<ul style="list-style-type: none"> P Applique - Applique K Picchetto - Stake C Cinghia per alberi Tree strap mounting A Picchetto H350 Stake H350 B Paletto H350 Bollard H350
 25° Lens	7G4563. _ _ _			
 40° Lens	744563. _ _ _			
 60° Lens	754563. _ _ _			

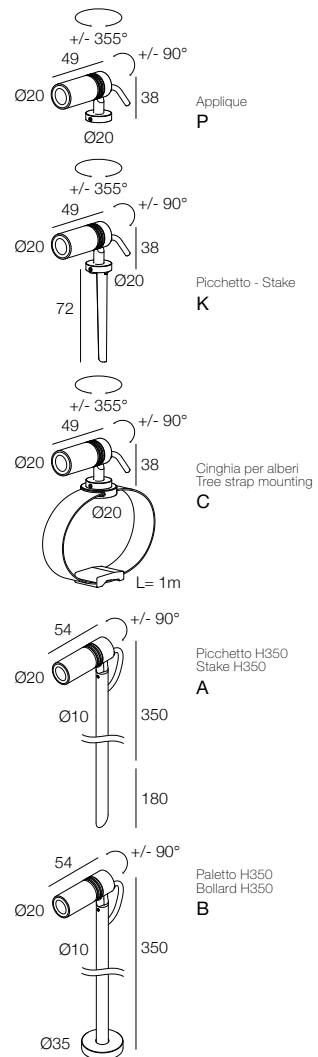

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

700mA CC20-F-700-N pag. 68

ACCESSORI
ACCESSORIES



Visiera antiabbagliamento
Low glare visor
A01445_0



Visiera cilindrica antiabbagliamento
Low glare snoot
A01444_0



Micro connettore stagno
Micro watertight connector
A00357.40











EXAMPLE CODE COMPOSITION
123456.



DRAFT

DGA







TRIUUM P IP67





-  IP67
-  Class III 24Vdc
-  Class II 220-240Vac
-  Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting
-  WIPS - Water Infiltration Protection System
-  Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
-  Collegare in parallelo 24Vdc
Connect in parallel at 24Vdc
-  Alimentazione integrata, collegare alla tensione di rete 220-240Vac
Built-in driver, connect directly to the line voltage to 220-240Vac
-  530 gr
-  Altamente riciclabile
Highly recyclable



TRIUUM P IP67





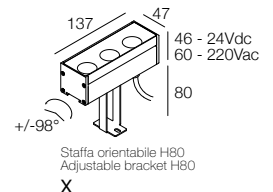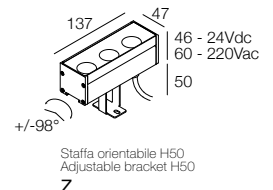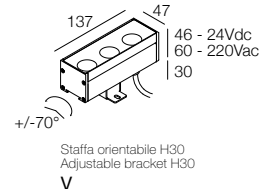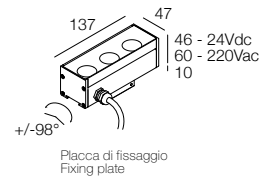

24Vdc

	7W 24Vdc	15W 24Vdc	Finiture Finish	Colore LED LED Colour	Filtri ottici Optical filters	Elementi di fissaggio Fixing element
Lumen Output 3000K	600lm	1000lm				
 10° Lens	734558. _ _ _ _	734572. _ _ _ _	■ 4 Nero - Black	<ul style="list-style-type: none"> ■ U 2200K ■ Y 2700K ■ 6 3000K ■ W 3000K CRI > 90 ■ J 3500K ■ 9 4000K 	<ul style="list-style-type: none"> W Senza Filtro Without Filter D Frangiluce Louver F Frangiluce Asy Asy Louver 	<ul style="list-style-type: none"> T Placca di fissaggio Fixing plate V Staffa orientabile H30 Adjustable bracket H30 Z Staffa orientabile H50 Adjustable bracket H50 X Staffa orientabile H80 Adjustable bracket H80
 25° Lens	7G4558. _ _ _ _	7G4572. _ _ _ _				
 40° Lens	744558. _ _ _ _	744572. _ _ _ _				
 60° Lens	754558. _ _ _ _	754572. _ _ _ _				
 Lente ellittica Elliptical lens	774558. _ _ _ _	774572. _ _ _ _				
 Wall Washer	7W4558. _ _ W _					



TRIUUM P IP67

220-240Vac

	8W 220-240Vac		Finiture Finish	Colore LED LED Colour	Filtri ottici Optical filters	Elementi di fissaggio Fixing element
Lumen Output 3000K	600lm					
 10° Lens	734582. _ _ _ _		■ 4 Nero - Black	<ul style="list-style-type: none"> ■ U 2200K ■ Y 2700K ■ 6 3000K ■ W 3000K CRI > 90 ■ J 3500K ■ 9 4000K 	<ul style="list-style-type: none"> W Senza Filtro Without Filter D Frangiluce Louver F Frangiluce Asy Asy Louver 	<ul style="list-style-type: none"> T Placca di fissaggio Fixing plate V Staffa orientabile H30 Adjustable bracket H30 Z Staffa orientabile H50 Adjustable bracket H50 X Staffa orientabile H80 Adjustable bracket H80
 25° Lens	7G4582. _ _ _ _					
 40° Lens	744582. _ _ _ _					
 60° Lens	754582. _ _ _ _					
 Lente ellittica Elliptical lens	774582. _ _ _ _					
 Wall Washer	7W4582. _ _ W _					

24Vdc

220-240Vac

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

ACCESSORI
ACCESSORIES




24Vdc CC20-F-24-N pag. 72

Micro connettore stagno
Micro watertight connector
A00357.40

Connettore stagno
Watertight connector
A01023.40

EXAMPLE CODE COMPOSITION





ARIEL P IP67



- IP67
- Class III
- Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting
- WIPS - Water Infiltration Protection System
- Cavo in neoprene 200 cm
200 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
- Collegare in serie 500mA o 700mA
Connect in series at 500mA or 700mA
- 400 gr
- Altamente riciclabile
Highly recyclable
- LED intercambiabile Plug&Play
Plug&Play interchangeable LED


ARIEL P IP67

	9W 500mA	13W 700mA	Finiture Finish	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters	Elementi di fissaggio Fixing element
Lumen Output 3000K	770lm	1000lm					
[1] 14° Lens	7Q4551_ _ _ _ _	7Q4564_ _ _ _ _	A6 RAL 9002 Gray white	U1 2200K CRI > 90	1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter	P Applique - Applique
18° Lens	784551_ _ _ _ _	784564_ _ _ _ _	4A RAL 7016 Anthracite Gray	B2 2400K CRI > 90	I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter	U Uscita cavo laterale Side exit cable
24° Lens	7G4551_ _ _ _ _	7G4564_ _ _ _ _	VC RAL 6009 Fir Green	X 2700K CRI > 90	8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver	K Picchetto - Stake
33° Lens	7E4551_ _ _ _ _	7E4564_ _ _ _ _	M8 RAL 8019 Brown	6 3000K CRI > 90	N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter	C Cinghia per alberi Tree strap mounting
52° Lens	754551_ _ _ _ _	754564_ _ _ _ _	MS Marrone brillante Bright Brown	W 3000K CRI > 90	4 Nero - Black	S Filtro Correttivo Softening Lens	A Picchetto H350 Stake H350
			3 Grigio - Gray	D 4000K CRI > 90			B Paletto H350 Bollard H350
			4 Nero - Black				

ARIEL P IP67

PLUG & PLAY

	9W 500mA	13W 700mA	Finiture Finish	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters	Elementi di fissaggio Fixing element
Lumen Output 3000K	770lm	1000lm					
[1] 14° Lens	7Q4552_ _ _ _ _	7Q4565_ _ _ _ _	A6 RAL 9002 Gray white	U1 2200K CRI > 90	1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter	P Applique - Applique
18° Lens	784552_ _ _ _ _	784565_ _ _ _ _	4A RAL 7016 Anthracite Gray	B2 2400K CRI > 90	I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter	U Uscita cavo laterale Side exit cable
24° Lens	7G4552_ _ _ _ _	7G4565_ _ _ _ _	VC RAL 6009 Fir Green	X 2700K CRI > 90	8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver	K Picchetto - Stake
33° Lens	7E4552_ _ _ _ _	7E4565_ _ _ _ _	M8 RAL 8019 Brown	6 3000K CRI > 90	N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter	C Cinghia per alberi Tree strap mounting
52° Lens	754552_ _ _ _ _	754565_ _ _ _ _	MS Marrone brillante Bright Brown	W 3000K CRI > 90	4 Nero - Black	S Filtro Correttivo Softening Lens	A Picchetto H350 Stake H350
			3 Grigio - Gray	D 4000K CRI > 90			B Paletto H350 Bollard H350
			4 Nero - Black				

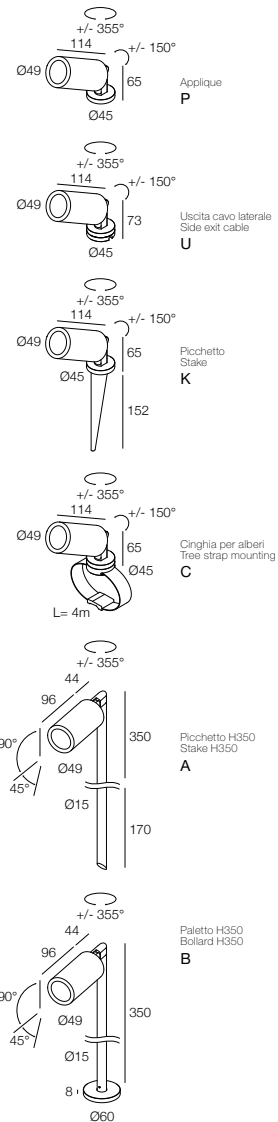

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

500mA	CC20-F-500-N	pag. 63
700mA	CC20-F-700-N	pag. 68

ACCESSORI
ACCESSORIES




Visiera antiabbagliamento
Low glare visor
A00519_0

Visiera cilindrica antiabbagliamento
Low glare snoot
A00848_0

Connettore stagno
Watertight connector
A00387.40

EXAMPLE CODE COMPOSITION

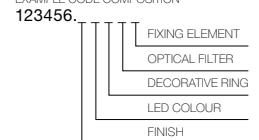

DGA

ARIEL P IP67

ARIEL P IP67

ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES

[1] Lente 14° non intercambiabile
14° Lens not interchangeable

































Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Lente 18° 18° Lens A01192.80	 Filtro Ellittico Elliptical Filter A01182.80	 Cromo Lucido Shiny Chrome A01272.10	 Cromo Lucido Shiny Chrome A01190.10
 Lente 24° 24° Lens A01193.80	 Filtro Nido d'ape Hex Louver A01183.40	 Oro Lucido Gold Chrome A01272.10	 Oro Lucido Gold Chrome A01190.10
 Lente 33° 33° Lens A01194.80	 Filtro Prismatico Prismatic Filter A01184.80	 Oro Satinato Satin Gold A01272.80	 Oro Satinato Satin Gold A01190.80
 Lente 52° 52° Lens A01195.80	 Filtro Correttivo Softening Lens A01185.80	 Nichel Satinato Satin Nickel A01272.N0	 Nichel Satinato Satin Nickel A01190.N0
		 Nero Black A01272.40	 Nero Black A01190.40

ARIEL P IP67 PLUG&PLAY

ACCESSORI INTERCAMBIABILI
INTERCHANGEABLE ACCESSORIES

[1] Lente 14° non intercambiabile
14° Lens not interchangeable

[2] Modulo plug&play per lente 14°
14° lens for plug&play module

Modulo 9W PLUG&PLAY	Modulo 13W PLUG&PLAY	Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Modulo 2200K CRI > 90 A01413.4U1 A01443.4U1 [2]	 Modulo 2200K CRI > 90 A01474.4U1 A01475.4U1 [2]	 Lente 18° 18° Lens A01192.80	 Filtro Ellittico Elliptical Filter A01182.80	 Cromo Lucido Shiny Chrome A01272.10	 Cromo Lucido Shiny Chrome A01190.10
 Modulo 2400K CRI > 90 A01413.4B2 A01443.4B2 [2]	 Modulo 2400K CRI > 90 A01474.4B2 A01475.4B2 [2]	 Lente 24° 24° Lens A01193.80	 Filtro Nido d'ape Hex Louver A01183.40	 Oro Lucido Gold Chrome A01272.10	 Oro Lucido Gold Chrome A01190.10
 Modulo 2700K CRI > 90 A01413.4X A01443.4X [2]	 Modulo 2700K CRI > 90 A01474.4X A01475.4X [2]	 Lente 33° 33° Lens A01194.80	 Filtro Prismatico Prismatic Filter A01184.80	 Oro Satinato Satin Gold A01272.80	 Oro Satinato Satin Gold A01190.80
 Modulo 3000K CRI > 80 A01413.46 A01443.46 [2]	 Modulo 3000K CRI > 80 A01474.46 A01475.46 [2]	 Lente 52° 52° Lens A01195.80	 Filtro Correttivo Softening Lens A01185.80	 Nichel Satinato Satin Nickel A01272.N0	 Nichel Satinato Satin Nickel A01190.N0
 Modulo 3000K CRI > 90 A01413.4W A01443.4W [2]	 Modulo 3000K CRI > 90 A01474.4W A01475.4W [2]			 Nero Black A01272.40	 Nero Black A01190.40
 Modulo 3500K CRI > 90 A01413.4K A01443.4K [2]	 Modulo 3500K CRI > 90 A01474.4K A01475.4K [2]				
 Modulo 4000K CRI > 90 A01413.4D A01443.4D [2]	 Modulo 4000K CRI > 90 A01474.4D A01475.4D [2]				



SATURNO P IP67



- IP67
- Class III
- Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting
- WIPS - Water Infiltration Protection System
- Cavo in neoprene 200 cm
200 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
- Collegare in serie 350mA o 500mA
Connect in series at 350mA or 500mA
- 730 gr
- Altamente riciclabile
Highly recyclable
- LED intercambiabile Plug&Play
Plug&Play interchangeable LED


SATURNO P IP67

	12W 350mA	18W 500mA	Finiture Finish	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters	Elementi di fissaggio Fixing element
Lumen Output 3000K	1250lm	1700lm					
[1] 12° Lens	7Q4566_	7Q4567_	A6 RAL 9002 Gray white	U1 2200K CRI > 90	1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter	P Applique - Applique
18° Lens	784566_	784567_	4A RAL 7016 Anthracite Gray	B2 2400K CRI > 90	I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter	U Uscita cavo laterale Side exit cable
24° Lens	7G4566_	7G4567_	VC RAL 6009 Fir Green	X 2700K CRI > 90	8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver	K Picchetto - Stake
33° Lens	7E4566_	7E4567_	M8 RAL 8019 Brown	W 3000K CRI > 90	N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter	C Cinghia per alberi Tree strap mounting
52° Lens	754566_	754567_	MS Marrone brillante Bright Brown	K 3500K CRI > 90	4 Nero - Black	S Filtro Correttivo Softening Lens	A Picchetto H350 Stake H350
			3 Grigio - Gray	D 4000K CRI > 90			B Paletto H350 Bollard H350
			4 Nero - Black				

SATURNO P IP67

PLUG & PLAY

	12W 350mA	18W 500mA	Finiture Finish	Colore LED LED Colour	Anelli decorativi Decorative rings	Filtri ottici Optical filters	Elementi di fissaggio Fixing element
Lumen Output 3000K	1250lm	1700lm					
[1] 12° Lens	7Q4568_	7Q4569_	A6 RAL 9002 Gray white	U1 2200K CRI > 90	1 Cromo Lucido Shiny Chrome	W Senza Filtro Without Filter	P Applique - Applique
18° Lens	784568_	784569_	4A RAL 7016 Anthracite Gray	B2 2400K CRI > 90	I Oro Lucido Gold Chrome	E Filtro Ellittico Elliptical Filter	U Uscita cavo laterale Side exit cable
24° Lens	7G4568_	7G4569_	VC RAL 6009 Fir Green	X 2700K CRI > 90	8 Oro Satinato Satin Gold	H Nido D'ape Hex Louver	K Picchetto - Stake
33° Lens	7E4568_	7E4569_	M8 RAL 8019 Brown	W 3000K CRI > 90	N Nichel Satinato Satin Nickel	P Filtro Prismatico Prismatic Filter	C Cinghia per alberi Tree strap mounting
52° Lens	754568_	754569_	MS Marrone brillante Bright Brown	K 3500K CRI > 90	4 Nero - Black	S Filtro Correttivo Softening Lens	A Picchetto H350 Stake H350
			3 Grigio - Gray	D 4000K CRI > 90			B Paletto H350 Bollard H350
			4 Nero - Black				

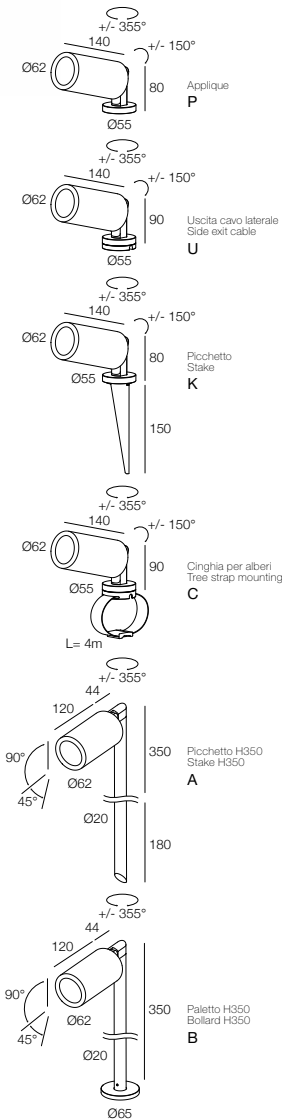

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

350mA CC20-F-350-N pag. 58
500mA CC20-F-500-N pag. 63

ACCESSORI
ACCESSORIES




Visiera antiabbagliamento
Low glare visor
A01448_0

Visiera cilindrica antiabbagliamento
Low glare snoot
A01447_0

Connettore stagno
Watertight connector
A00387.40

EXAMPLE CODE COMPOSITION

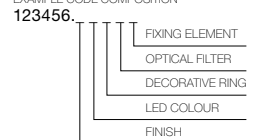

DGA

SATURNO P IP67

SATURNO P IP67

ACCESSORI INTERCambiabili
INTERCHANGEABLE ACCESSORIES

[1] Lente 12° non intercambiabile
12° Lens not interchangeable

Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Lente 18° 18° Lens A01196.80	 Filtro Ellittico Elliptical Filter A01186.80	 Cromo Lucido Shiny Chrome A01273.10	 Cromo Lucido Shiny Chrome A01191.10
 Lente 24° 24° Lens A01197.80	 Filtro Nido d'ape Hex Louver A01187.40	 Oro Lucido Gold Chrome A01273.10	 Oro Lucido Gold Chrome A01191.10
 Lente 33° 33° Lens A01198.80	 Filtro Prismatico Prismatic Filter A01188.80	 Oro Satinato Satin Gold A01273.80	 Oro Satinato Satin Gold A01191.80
 Lente 52° 52° Lens A01199.80	 Filtro Correttivo Softening Lens A01189.80	 Nichel Satinato Satin Nickel A01273.N0	 Nichel Satinato Satin Nickel A01191.N0
		 Nero Black A01273.40	 Nero Black A01191.40

































SATURNO P IP67

PLUG&PLAY

ACCESSORI INTERCambiabili
INTERCHANGEABLE ACCESSORIES

[1] Lente 12° non intercambiabile
12° Lens not interchangeable

[2] Modulo plug&play per lente 12°
12° lens for plug&play module

Modulo 12W PLUG&PLAY	Modulo 18W PLUG&PLAY	Lenti Lenses	Filtri ottici Optical filters	Anelli porta filtro Filter holder rings	Anelli decorativi Decorative rings
 Modulo 2200K CRI > 90 A01304.4U1 A01442.4U1 [2]	 Modulo 2200K CRI > 90 A01472.4U1 A01473.4U1 [2]	 Lente 18° 18° Lens A01196.80	 Filtro Ellittico Elliptical Filter A01186.80	 Cromo Lucido Shiny Chrome A01273.10	 Cromo Lucido Shiny Chrome A01191.10
 Modulo 2400K CRI > 90 A01304.4B2 A01442.4B2 [2]	 Modulo 2400K CRI > 90 A01472.4B2 A01473.4B2 [2]	 Lente 24° 24° Lens A01197.80	 Filtro Nido d'ape Hex Louver A01187.40	 Oro Lucido Gold Chrome A01273.10	 Oro Lucido Gold Chrome A01191.10
 Modulo 2700K CRI > 90 A01304.4X A01442.4X [2]	 Modulo 2700K CRI > 90 A01472.4X A01473.4X [2]	 Lente 33° 33° Lens A01198.80	 Filtro Prismatico Prismatic Filter A01188.80	 Oro Satinato Satin Gold A01273.80	 Oro Satinato Satin Gold A01191.80
 Modulo 3000K CRI > 80 A01304.46 A01442.46 [2]	 Modulo 3000K CRI > 80 A01472.46 A01473.46 [2]	 Lente 52° 52° Lens A01199.80	 Filtro Correttivo Softening Lens A01189.80	 Nichel Satinato Satin Nickel A01273.N0	 Nichel Satinato Satin Nickel A01191.N0
 Modulo 3000K CRI > 90 A01304.4W A01442.4W [2]	 Modulo 3000K CRI > 90 A01472.4W A01473.4W [2]			 Nero Black A01273.40	 Nero Black A01191.40
 Modulo 3500K CRI > 90 A01304.4K A01442.4K [2]	 Modulo 3500K CRI > 90 A01472.4K A01473.4K [2]				
 Modulo 4000K CRI > 90 A01304.4D A01442.4D [2]	 Modulo 4000K CRI > 90 A01472.4D A01473.4D [2]				

DGA

BINARI E ALIMENTATORI

TRACKS AND DRIVERS

Binari 230Vac

230Vac tracks

Gli apparecchi a binario DGA rappresentano una reale alternativa alle più comuni sorgenti luminose finora impiegate per l'illuminazione generale di grandi ambienti.

Le nuove linee sfruttano la più evoluta tecnologia POWER LED, ottenendo prestazioni illuminotecniche elevatissime con bassi consumi energetici. I proiettori sono forniti con adattatore a binario Eurostandard che consente la loro installazione su binari a tre circuiti (i più diffusi sul mercato). Le soluzioni offerte sono adeguate per l'illuminazione di vari ambienti, come: negozi, ristoranti, bar, grandi magazzini, uffici, edifici pubblici, aeroporti o musei.


La struttura modulare del sistema a Binario permette di prolungarlo e adattarlo a qualsiasi necessità. La modularità del prodotto aiuta architetti e designers ad adattarlo nello spazio.

The fixtures track DGA series are the new alternatives to the common light sources that have been used up to now for general lighting of large spaces.


The new series exploit the most advanced POWER LED technology, achieving high lighting performances with very low energy consumption. The spotlights are provided with track adapter Eurostandard, which permits the installation on three-circuits lighting tracks (the most widespread on the market).

The fixtures propose suitable solutions for lighting many different spaces, like: shops, restaurants, department stores, offices, public buildings, museums and airports.

The modular structure of our track system makes it easy to extend and adapt to various needs. Modularity helps architects and designers to fit the system into the appropriate space.


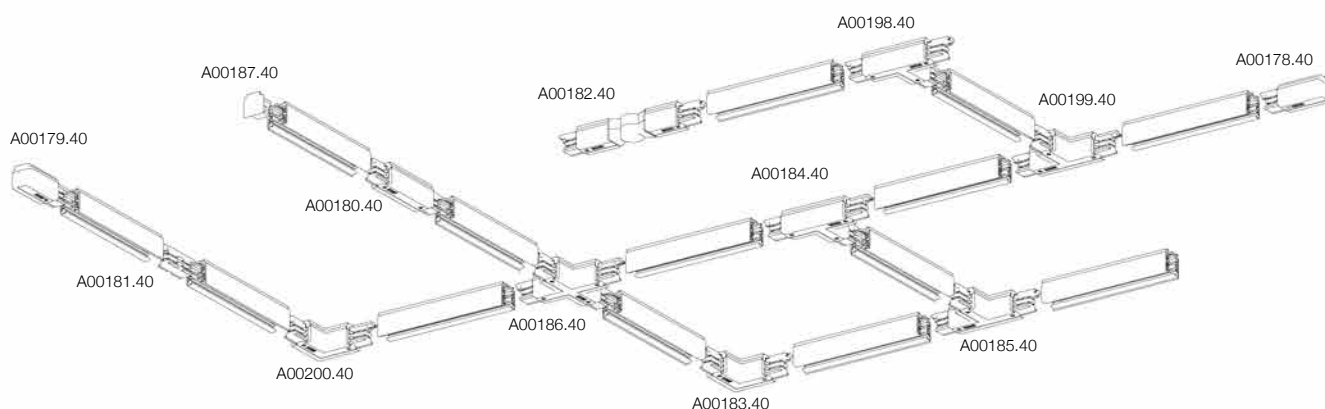


BINARIO DA SUPERFICIE
SURFACE MOUNTING TRACK


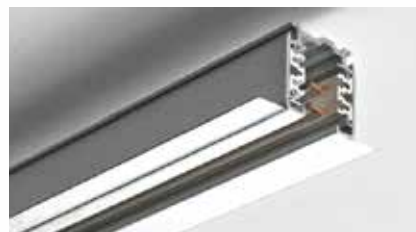

















BINARIO DA INCASSO
RECESSED TRACK

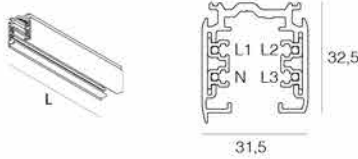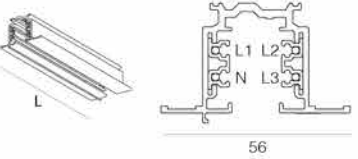DALI

	CODE	DALI	DESCRIPTION
	A00172._ 0	A00172._ D	Binario da superficie L = 1 metro Surface mounting L = 1 meter
	A00173._ 0	A00173._ D	Binario da superficie L = 2 metri Surface mounting L = 2 meters
	A00174._ 0	A00174._ D	Binario da superficie L = 3 metri Surface mounting L = 3 meters
	A00175._ 0	A00175._ D	Binario da incasso L = 1 metro Recessed track L = 1 meter
	A00176._ 0	A00176._ D	Binario da incasso L = 2 metri Recessed track L = 2 meters
	A00177._ 0	A00177._ D	Binario da incasso L = 3 metri Recessed track L = 3 meters

DALI


		CODE	DALI	DESCRIPTION
		A00182._0		Connettore orientabile per binario Adjustable feed for track
		A00178._0	A00178._D	Connettore sinistro ingresso alimentazione Left input
		A00179._0	A00179._D	Connettore destro ingresso alimentazione Right input
		A00180._0	A00180._D	Connettore lineare ingresso alimentazione Middle input
		A00183._0	A00183._D	Connettore a L ingresso alimentazione L input
		A00200._0	A00200._D	Connettore a L ingresso alimentazione L input
		A00184._0	A00184._D	Connettore a T dx ingresso alimentazione T (right) input
		A00198._0	A00198._D	Connettore a T sx ingresso alimentazione T (left) input
		A00185._0	A00185._D	Connettore a T sx ingresso alimentazione T (left) input
		A00199._0	A00199._D	Connettore a T dx ingresso alimentazione T (right) input
		A00186._0	A00186._D	Connettore a X ingresso alimentazione X input
		A00181._0	A00181._D	Connettore lineare per binario Middle feed for track
		A00187._0	A00187._D	Elemento terminale di chiusura Closing plug

EXAMPLE CODE COMPOSITION
123456.TYPE
FINISH


■ 3 Grigio - Gray
 □ B Bianco - White
 ■ N Nero - Black

Usò degli accessori a "L" e a "T"
 La linea rossa indica la linea della polarità.

Use of "L" and "T" accessories
 Red line indicates polarity ridge.

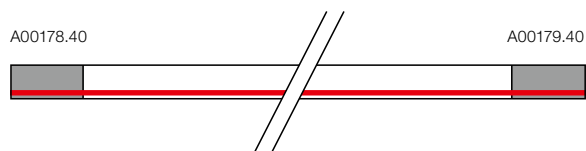

Vista in pianta / Floor view

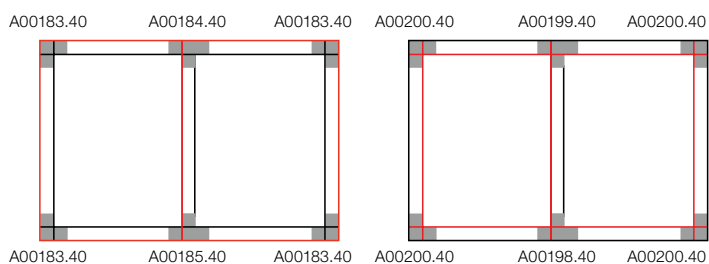

Binari a sospensione 230Vac

230Vac suspended tracks

La distanza di fissaggio consigliata è di 1000mm.

NOTA: Un carico non superiore a 10Kg di peso può essere attaccato ad un elemento essendo lo sforzo di rottura per trazione 100 N (1kg = 9,81N) e la coppia massima 2,5 Nm. (GA 69 5kg/50 N).


The recommended fastening distance is 1000mm.

NOTE: A load not heavier than 10kg may hang on a power takeoff adapter, the pull strength being 100 N (1kp = 9.81N) and the maximum torque 2.5Nm. (GA 69 5kg/50 N).




SOSPENSIONE RIGIDA



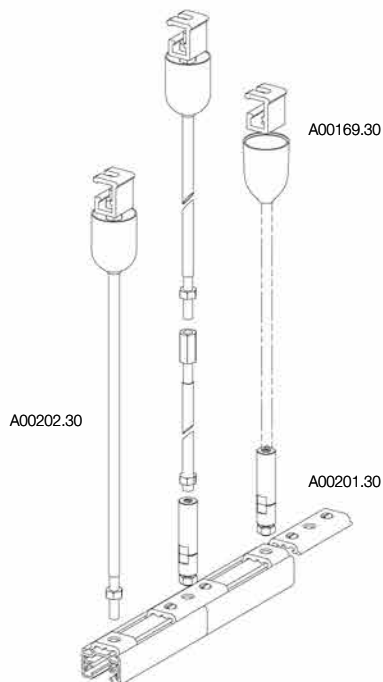




POLE SUSPENSION


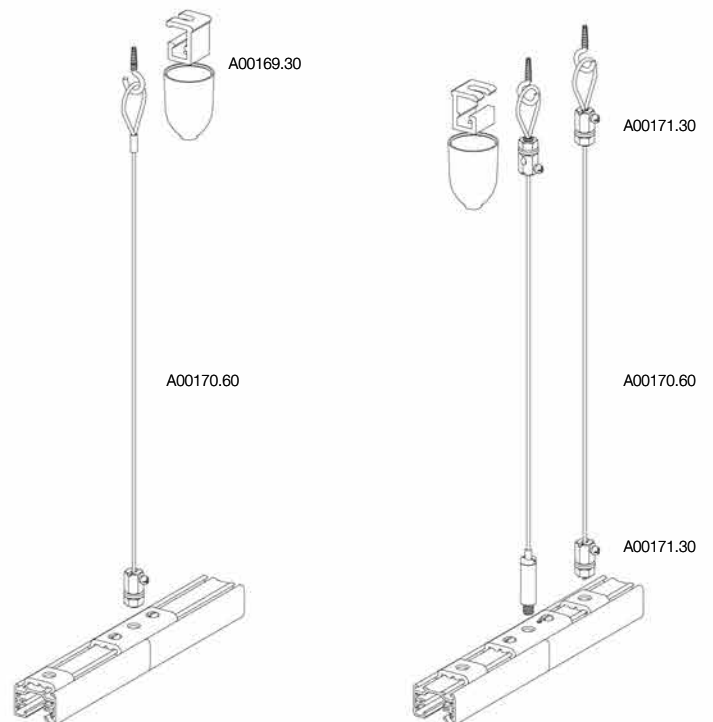


SOSPENSIONE CON CAVI


WIRE SUSPENSION



	CODE	FINISH	DESCRIPTION
	A00169.30 A00169.B0 A00169.N0	Grigio - Gray Bianco - White Nero - Black	Accessorio fissaggio per binario a sospensione Ceiling clamp for suspension track
	A00189.30 A00189.B0 A00189.N0	Grigio - Gray Bianco - White Nero - Black	Elemento fissaggio per binario a sospensione Suspension clamp
	A00202.30	Grigio - Gray	Astina filettata per sospensione Threaded arm for suspension mounting
	A00190.30	Grigio - Gray	Elemento fissaggio per connessione binario Suspension clamp for track connection
	A00201.30	Grigio - Gray	Boccola fissaggio astina Bushing for fixing the arm
	A00170.60	Grigio - Gray	Cavo per sospensione binario L =150 cm Suspension wire L =150 cm
	A00171.30	Grigio - Gray	Boccola stringicavo per binario sospensione Height adjusting sleeve for suspension

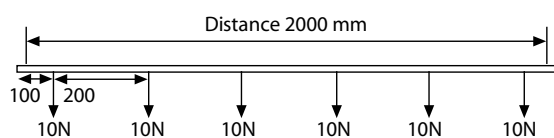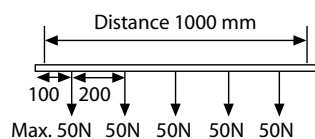

L/mm	a/mm	b/mm	c/mm	d/mm
1000	250			
2000	250	1000		
3000	250		1000	1000
4000	250		1500	1000

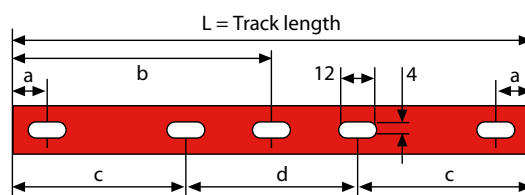



Binari 230Vac per apparecchi Saturno BF con connettore a filo

230Vac tracks for Saturno BF fixtures supplied with flush to track adaptor

I binari per la linea di apparecchi con connettore a filo coniugano estetica e funzionalità.

Gli apparecchi provvisti di questo attacco dal design essenziale, assolvono una duplice funzione: forniscono una connessione a filo ed ospitano il corpo alimentazione.








Questa soluzione, che ha un impatto minimo sull'architettura, nasce con l'intento di rispondere alle aspettative dei progettisti più esigenti.

The tracks for all fixtures supplied with flush to track adaptor combine the aesthetics with the functionality.






















The devices equipped with retractable connector with its essential design, perform a double function: they provide a wired connection and host the power supply body.

This solution, which has a minimal impact on the architecture, was born with the aim of meeting the expectations of the most demanding designers.

DALI

	CODE	DALI	DESCRIPTION
	A01026_0	A01026_D	Binario da superficie 230V L = 1 m 230Vac surface track L = 1 m
	A01027_0	A01027_D	Binario da superficie 230V L = 2 m 230Vac surface track L = 2 m
	A01028_0	A01028_D	Binario da superficie 230V L = 3 m 230Vac surface track L = 3 m
	A01083_0	A01083_D	Binario da incasso 230V L = 1 m 230V recessed track L = 1 m
	A01029_0	A01029_D	Binario da incasso 230V L = 2 m 230V recessed track L = 2 m
	A01030_0	A01030_D	Binario da incasso 230V L = 3 m 230V recessed track L = 3 m
	A01035_0	A01035_D	Giunto flessibile 230V Flex-coupler

DALI

		CODE	DALI	DESCRIPTION
		A01032._0	A01032._D	Giunto terminale per alimentazione 230V con terra sinistra End feed earth left
		A01031._0	A01031._D	Giunto terminale per alimentazione 230V con terra destra End feed earth right
		A01033._0	A01033._D	Giunto intermedio per alimentazione 230V I-coupler
		A01037._0	A01037._D	Giunto angolare 230V con terra esterna L-coupler earth outside
		A01036._0	A01036._D	Giunto angolare 230V con terra interna L-coupler earth inside
		A01040._0	A01040._D	Giunto a T 230V con terra esterna destra T-coupler earth outside right
		A01041._0	A01041._D	Giunto a T 230V con terra interna sinistra T-coupler earth inside left
		A01038._0	A01038._D	Giunto a T 230V con terra esterna sinistra T-coupler earth outside left
		A01039._0	A01039._D	Giunto a T 230V con terra interna destra T-coupler earth inside right
		A01042._0	A01042._D	Giunto a X 230V X-coupler
		A01034._0	A01034._D	Raccordo ad innesto 230V Straight coupler
		A01043._0		Testata di chiusura End cap
		A01044._0		Morsetto per binario a sospensione Pendant clip
		A01045._0		Supporto di irrigidimento per binario a sospensione Mechanical couple
		A01046._0		Astina filettata per sospensione L = 1,2 m Pendant pole L = 1,2 m
		A01047.30		Cavo per sospensione binario L = 1,5 m con boccola Suspension steel wire L = 1,5 m

EXAMPLE CODE COMPOSITION

123456.

TYPE
FINISH

-  3 Grigio - Gray
-  4 Nero - Black
-  7 Bianco - White



Micro Binari 48Vdc

48Vdc Micro Tracks

Una nuova serie di binari a bassa tensione, dal minimo impatto visivo, per soddisfare l'esigenza di miniaturizzazione delle componenti e delle strutture.





Le dimensioni estremamente ridotte e compatte del binario, che misura soltanto 10 x 19 mm, rendono questa famiglia di prodotti la soluzione ideale per le situazioni in cui la cura dei dettagli e l'estetica minimale sono fondamentali.













È disponibile un'ampia gamma di accessori a corredo. Il nuovo Micro Binario 48Vdc è provvisto di una linea DALI dedicata che permette il controllo di ogni punto luce.

A new series of low voltage tracks, with minimal visual impact, able to meet the need for miniaturization of components and structures. The extremely small and compact track dimensions, which measure only 10 x 19 mm, make this product family the ideal solution for all situations where the attention to details and the minimal aesthetics are essential.

A wide range of accessories is available.

The new 48Vdc Micro Track is equipped with a dedicated DALI line allowing the control of each lighting spot.

































	CODE	DESCRIPTION
	A00918.40	Binario DALI Microtrack standard 48V L = 1 m 48V track L = 1 m
 	A01055.40	Binario DALI Microtrack standard 48V L = 2 m 48V track L = 2 m
	A01056.40	Binario DALI Microtrack standard 48V L = 3 m 48V track L = 3 m
	A01064.40	Binario DALI Microtrack da incasso a filo 48V L = 1 m 48V Trimless track L = 1 m
 	A01065.40	Binario DALI Microtrack da incasso a filo 48V L = 2 m 48V Trimless track L = 2 m
	A01066.40	Binario DALI Microtrack da incasso a filo 48V L = 3 m 48V Trimless track L = 3 m

	CODE	DESCRIPTION
	A00894.40	Testata di alimentazione Microtrack 48V Live end
	A00916.40	Testata di alimentazione a scomparsa con cavo Microtrack 48V Concealed end-feed with wire
	A01057.40	Giunto passante Microtrack 48V Joining connector
	A00893.40	Tappo di chiusura Microtrack standard 48V Dead end
	A01067.40	Tappo di chiusura Microtrack da incasso a filo 48V Dead end for Trimless track
	A01058.40	Giunto a L Microtrack 48V L joint
	A01059.40	Giunto a L soffitto-parete Microtrack 48V L-feed ceiling-wall
	A01060.40	Giunto flessibile Microtrack 48V Adjustable corner
	A01061.40	Giunto angolare orizzontale Microtrack 48V Horizontal corner joint
	A01062.40	Giunto angolare verticale Microtrack 48V Vertical corner joint
	A01068.40	Dima per binario DALI Microtrack da incasso a filo 48V Template for Trimless track
	A01069.40	Pinza per bloccaggio PVC in caso di taglio binario Microtrack 48V Locking tool for PVC in case of track cutting

Alimentatori 350mA IP20




























































350mA LED driver IP20

■ NON DIMMERABILI NOT DIMMABLE

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
IP20	CC6-F-350-N	1 - 6 LED 1W 1 LED 4W 1 LED ZOOM	@230Vac		 Ø 47	  * EAC
		1 - 6 LED 1W 1 LED 4W 1 LED ZOOM	@110Vac			
IP20	CC14-F-350N	1 - 13 LED 1W 1 - 4 LED 4W 1 - 3 LED ZOOM 1 LED 12W	@230Vac		 Ø 40	    *
		1 - 9 LED 1W 1 - 2 LED 4W 1 - 2 LED ZOOM	@110Vac			
IP20	CC15-F-350-S	1 - 13 LED 1W 1 - 3 LED 4W 1 - 3 LED ZOOM 1 LED 12W	@230Vac		 Ø 32	   * EAC
		1 - 5 LED 1W 1 LED 4W 1 LED ZOOM	@110Vac			
IP20	CC20-F-350-N	1 - 16 LED 1W 1 - 5 LED 4W 1 - 4 LED ZOOM 1 LED 12W	@230Vac		 Ø 55	   * EAC
IP20	CC25-F-350-NT	7 - 16 LED 1W 3 - 5 LED 4W 2 - 4 LED ZOOM 1 LED 12W	@230Vac		 Ø 53	  EAC 
IP20	CC50-F-350-N	10 - 23 LED 1W 1 - 8 LED 4W 1 - 6 LED ZOOM 1 - 2 LED 12W	@230Vac		 Ø 84	    * EAC 
		10 - 23 LED 1W 1 - 8 LED 4W 1 - 6 LED ZOOM 1 - 2 LED 12W	@110Vac			

DIMMERABILI - MULTIFUNZIONE - PUSH - 1-10

DIMMABLE - MULTIFUNCTION - PUSH - 1-10

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
  	CC20-M-350-N	1 - 14 LED 1W 1 - 4 LED 4W 1 - 3 LED ZOOM 1 LED 12W	@230Vac	 22 52 119	 Ø 55	  *   * EAC
		1 - 14 LED 1W 1 - 4 LED 4W 1 - 3 LED ZOOM 1 LED 12W	@110Vac			
	CC30-M-350-NL	1 - 18 LED 1W 1 - 6 LED 4W 1 - 4 LED ZOOM 1 LED 12W	@230Vac	 34 40 210	 Ø 54	  
		1 - 18 LED 1W 1 - 6 LED 4W 1 - 4 LED ZOOM 1 LED 12W	@110Vac			
  	CC32-M-350-N	4 - 17 LED 1W 2 - 5 LED 4W 1 - 4 LED ZOOM 1 LED 12W	@230Vac	 21 67 103	 Ø 72	  *  EAC
		4 - 14 LED 1W 2 - 3 LED 4W 1 - 3 LED ZOOM 1 LED 12W	@110Vac			
	CC40-M-350-NR	4 - 18 LED 1W 2 - 6 LED 4W 1 - 4 LED ZOOM 1 LED 12W	@230Vac	 24 60 126	 Ø 64	
		4 - 18 LED 1W 2 - 6 LED 4W 1 - 4 LED ZOOM 1 LED 12W	@110Vac			
  	CC50-M-350-N	10 - 23 LED 1W 1 - 8 LED 4W 1 - 6 LED ZOOM 1 - 2 LED 12W	@230Vac	 22 79 124	 Ø 84	  *   * EAC 
		10 - 23 LED 1W 1 - 8 LED 4W 1 - 6 LED ZOOM 1 - 2 LED 12W	@110Vac			
  	CC20-A-350-N	5 - 16 LED 1W 2 - 4 LED 4W 2 - 4 LED ZOOM 1 LED 12W (DimToWarm)	@230Vac	 22 52 119	 Ø 72	  *   * EAC 
		5 - 15 LED 1W 2 - 3 LED 4W 2 - 3 LED ZOOM 1 LED 12W (DimToWarm)	@110Vac			
  	CC50-A-350-N	10 - 23 LED 1W 1 - 8 LED 4W 1 - 6 LED ZOOM 1 - 2 LED 12W (DimToWarm)	@230Vac	 22 79 124	 Ø 84	    * EAC   
		10 - 23 LED 1W 1 - 8 LED 4W 1 - 6 LED ZOOM 1 - 2 LED 12W (DimToWarm)	@110Vac			

POTENZIOMETRO
POTENTIOMETER

CODE
POT-M-REG-N















































*Disponibile su richiesta
Available upon request

Alimentatori 350mA IP20

350mA LED driver IP20
















DIMMERABILI - DALI

DIMMABLE - DALI

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CC20-D-350-N	4 - 14 LED 1W 1 - 4 LED 4W 1 - 3 LED ZOOM 1 LED 12W	@230Vac	 22 52 119	 Ø 55	   * EAC
		4 - 14 LED 1W 1 - 4 LED 4W 1 - 3 LED ZOOM 1 LED 12W	@110Vac			
	CC20-D-350-NT	7 - 16 LED 1W 3 - 5 LED 4W 2 - 4 LED ZOOM 1 LED 12W	@230Vac	 30 43 190	 Ø 62	   EAC 
	CC30-D-350-NL	1 - 18 LED 1W 1 - 6 LED 4W 1 - 4 LED ZOOM 1 LED 12W	@230Vac	 34 40 210	 Ø 54	   
		1 - 18 LED 1W 1 - 6 LED 4W 1 - 4 LED ZOOM 1 LED 12W	@110Vac			
 	CC32-D-350-N	2 - 16 LED 1W 1 - 4 LED 4W 1 - 4 LED ZOOM 1 LED 12W	@230Vac	 21 67 103	 Ø 72	  * UL US EAC
		2 - 14 LED 1W 1 - 3 LED 4W 1 - 3 LED ZOOM 1 LED 12W	@110Vac			
   	CC38-D-350-N	4 - 18 LED 1W 2 - 5 LED 4W 1 - 4 LED ZOOM 1 LED 12W	@230Vac	 30 44 147	 Ø 54	  * EAC 
   	CC50-D-350-N	10 - 23 LED 1W 1 - 8 LED 4W 1 - 6 LED ZOOM 1 - 2 LED 12W	@230Vac	 22 79 124	 Ø 84	  * UL US S* EAC SELV 120V
		10 - 23 LED 1W 1 - 8 LED 4W 1 - 6 LED ZOOM 1 - 2 LED 12W	@110Vac			

DIMMERABILI - TAGLIO DI FASE (IGBT - TRIAC)

DIMMABLE - PHASE CUT (IGBT - TRIAC)

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
  	CC18-C-350-N	9 - 17 LED 1W 3 - 5 LED 4W 2 - 4 LED ZOOM 1 LED 12W	@230Vac	 22 52 119	 Ø 55	  EAC 
		9 - 17 LED 1W 3 - 5 LED 4W 2 - 4 LED ZOOM 1 LED 12W	@230Vac			
 	CC32-C-350-N	1 - 15 LED 1W 1 - 5 LED 4W 1 - 3 LED ZOOM 1 LED 12W	@230Vac	 34 46 166	 Ø 56	   * EAC

POTENZIOMETRO
POTENTIOMETER
















CODE
POT-M-REG-N



*Disponibile su richiesta
Available upon request











DIMMERABILI - CASAMBI INTEGRATO

DIMMABLE - CASAMBI INTEGRATED

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
  	CC38-B-350-N	4 - 18 LED 1W 2 - 5 LED 4W 1 - 4 LED ZOOM 1 LED 12W	@230Vac	 30 44 147	 Ø 54	
	CC60-B-350-N	10 - 23 LED 1W 1 - 8 LED 4W 1 - 6 LED ZOOM 1 - 2 LED 12W	@230Vac	 22 79 124	 Ø 84	   
  		10 - 23 LED 1W 1 - 8 LED 4W 1 - 6 LED ZOOM 1 - 2 LED 12W	@110Vac			






DIMMERABILI - DMX

DIMMABLE - DMX

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CC36-X-350-N	1 - 30 LED 1W 1 - 9 LED 4W 1 - 9 LED ZOOM 1 - 3 LED 12W 1 - 10 LED 3x1W RGB	@230Vac	 36 60 210	 Ø 70	
	CC50-X-350-NL	1 - 40 LED 1W 1 - 12 LED 4W 1 - 12 LED ZOOM 1 - 4 LED 12W 1 - 16 LED 3x1W RGB	@230Vac	 31 76 153	 Ø 84	 
		1 - 40 LED 1W 1 - 4 LED 4W 1 - 4 LED ZOOM 1 LED 12W 1 - 16 LED 3x1W RGB	@110Vac			

NON DIMMERABILI - FISSI - PER BATTERIA







NOT DIMMABLE - FIXED - FOR BATTERY

IP20	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC10-F-350-NB	1 - 3 LED 1W 1 LED 4W 1 LED ZOOM	12 Vdc	 21 31 61	 Ø 38	 
		1 - 6 LED 1W 1 - 2 LED 4W 1 LED ZOOM	24 Vdc			
		1 - 12 LED 1W 1 - 4 LED 4W 1 - 3 LED ZOOM	48 Vdc			





Alimentatori 350mA IP67

350mA LED driver IP67











NON DIMMERABILI NOT DIMMABLE

IP67	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC14-F-350-PI	1 - 13 LED 1W 1 - 4 LED 4W 1 LED 12W	@230Vac			
	CC15-F-350-PI	1 - 14 LED 1W 1 - 4 LED 4W 1 LED 12W	@230Vac			
	CC20-F-350-PI	10 - 18 LED 1W 3 - 5 LED 4W 1 LED 12W	@230Vac			







DIMMERABILI - MULTIFUNZIONE - PUSH - 1-10 DIMMABLE - MULTIFUNCTION - PUSH - 1-10

IP67	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC16-M-350-P	1 - 15 LED 1W 1 - 4 LED 4W 1 LED 12W	@230Vac			
		1 - 14 LED 1W 1 - 3 LED 4W 1 LED 12W	@110Vac			

DIMMERABILI - DALI DIMMABLE - DALI

IP67	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CC20-D-350-P	1 - 16 LED 1W 1 - 5 LED 4W 1 LED 12W	@230Vac			  
		1 - 12 LED 1W 1 - 4 LED 4W 1 LED 12W	@110Vac			
	CC55-D-350-PI	1 - 18 LED 1W 1 - 5 LED 4W 1 LED 12W	@230Vac			
		1 - 9 LED 1W 1 - 3 LED 4W	@110Vac			

DIMMERABILI - TAGLIO DI FASE (IGBT - TRIAC) DIMMABLE - PHASE CUT (IGBT - TRIAC)

IP67	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC10-C-350-PI	7 - 10 LED 1W	@230Vac			
	CC25-C-350-PI	15 - 23 LED 1W 5 - 7 LED 4W 1 - 2 LED 12W	@230Vac			

POTENZIOMETRO
POTENTIOMETER

CODE
POT-M-REG-N


































Alimentatori 500mA IP20

500mA LED driver IP20

■ NON DIMMERABILI

NOT DIMMABLE

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
CC6-F-500-N		1 - 3 LED 2W 1 LED 6W	@230Vac	 22 42 68	 Ø 47	 * EAC
		1 - 3 LED 2W 1 LED 6W	@110Vac			
CC10-F-500-NI		1 - 5 LED 2W 1 LED 6W 1 LED 9W	@230Vac	 23 39 76	 Ø 44	
		1 - 3 LED 2W 1 LED 6W	@110Vac			
CC10-F-500-SI		1 - 6 LED 2W 1 LED 9W	@230Vac	 19 22 132	 Ø 28	
CC14-F-500-S		1 - 7 LED 2W 1 - 2 LED 6W 1 LED 9W	@230Vac	 19 22 150	 Ø 32	   * EAC
		1 - 4 LED 2W 1 - 2 LED 6W	@110Vac			
CC20-F-500-N		1 - 10 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac	 22 52 119	 Ø 55	   * EAC
CC20-F-500-NI		4 - 12 LED 2W 1 - 2 LED 9W 1 LED 18W	@230Vac	 23 38 125	 Ø 42	
CC25-F-500-NT		7 - 12 LED 2W 2 - 4 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac	 30 43 157	 Ø 53	  EAC 
CC50-F-500-N		10 - 22 LED 2W 1 - 5 LED 6W 1 - 3 LED 9W 1 - 2 LED 18W	@230Vac	 22 79 124	 Ø 84	    * EAC 
		10 - 22 LED 2W 1 - 5 LED 6W 1 - 3 LED 9W 1 - 2 LED 18W	@110Vac			

*Disponibile su richiesta
Available upon request

Alimentatori 500mA IP20

500mA LED driver IP20

DIMMERABILI - MULTIFUNZIONE - PUSH - 1-10

DIMMABLE - MULTIFUNCTION - PUSH - 1-10

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CC20-M-500-N	1 - 10 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac	 22 52 118	Ø 55	
		1 - 7 LED 2W 1 - 3 LED 6W 1 LED 9W 1 LED 18W	@110Vac			
	CC30-M-500-NL	1 - 15 LED 2W 1 - 4 LED 6W 1 - 3 LED 9W 1 LED 18W	@230Vac	 34 40 210	Ø 54	
		1 - 15 LED 2W 1 - 4 LED 6W 1 - 3 LED 9W 1 LED 18W	@110Vac			
 	CC32-M-500-N	1 - 14 LED 2W 1 - 4 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac	 21 67 103	Ø 72	
		1 - 8 LED 2W 1 - 2 LED 6W 1 LED 9W	@110Vac			
	CC40-M-500-NR	4 - 18 LED 2W 1 - 4 LED 6W 1 - 3 LED 9W 1 LED 18W	@230Vac	 24 60 126	Ø 64	
		4 - 18 LED 2W 1 - 4 LED 6W 1 - 3 LED 9W 1 LED 18W	@110Vac			
 	CC50-M-500-N	10 - 22 LED 2W 1 - 5 LED 6W 1 - 3 LED 9W 1 - 2 LED 18W	@230Vac	 22 79 124	Ø 84	
		10 - 12 LED 2W 1 - 5 LED 6W 1 - 3 LED 9W 1 - 2 LED 18W	@110Vac			
 	CC20-A-500-N	2 - 10 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac	 22 52 118	Ø 72	
		2 - 10 LED 2W 1 - 2 LED 6W 1 LED 9W	@110Vac			
 	CC36-A-500-N	4 - 14 LED 2W 1 - 4 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac	 30 44 147	Ø 54	
		4 - 14 LED 2W 1 - 4 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac			
 	CC50-A-500-N	10 - 22 LED 2W 1 - 5 LED 6W 1 - 3 LED 9W 1 - 2 LED 18W	@230Vac	 22 79 124	Ø 84	
		10 - 22 LED 2W 1 - 5 LED 6W 1 - 3 LED 9W 1 - 2 LED 18W	@110Vac			

POTENZIOMETRO
POTENTIOMETER

CODE
POT-M-REG-N








































*Disponibile su richiesta
Available upon request

Alimentatori 500mA IP20

500mA LED driver IP20

DIMMERABILI - DALI

DIMMABLE - DALI

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC10-D-500-NI	1 - 6 LED 2W 1 LED 6W 1 LED 9W	@230Vac			
	CC25-D-500-NI	1 - 15 LED 2W 1 - 4 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac			
 	CC20-D-500-N	2 - 10 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac			
	CC20-D-500-NT	7 - 15 LED 2W 2 - 4 LED 6W 2 LED 9W 1 LED 18W	@230Vac			
	CC30-D-500-NL	1 - 15 LED 2W 1 - 4 LED 6W 1 - 3 LED 9W 1 LED 18W	@230Vac			
		1 - 15 LED 2W 1 - 4 LED 6W 1 - 3 LED 9W 1 LED 18W	@110Vac			
 	CC32-D-500-N	2 - 14 LED 2W 1 - 4 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac			
  	CC38-D-500-N	4 - 17 LED 2W 1 - 4 LED 6W 1 LED 18W	@230Vac			
   	CC50-D-500-N	10 - 22 LED 2W 1 - 5 LED 6W 1 - 3 LED 9W 1 - 2 LED 18W	@230Vac			
		10 - 22 LED 2W 1 - 5 LED 6W 1 - 3 LED 9W 1 - 2 LED 18W	@110Vac			

POTENZIOMETRO
POTENTIOMETER

CODE
POT-M-REG-N















*Disponibile su richiesta
Available upon request

Alimentatori 500mA IP20

500mA LED driver IP20














DIMMERABILI - TAGLIO DI FASE (IGBT - TRIAC)

DIMMABLE - PHASE CUT (IGBT - TRIAC)

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
   <small>DM-TU-WARM</small>	CC10-C-500-N	3 - 5 LED 2W 1 - 2 LED 6W 1 LED 9W	@230Vac			
	CC20-C-500-N	2 - 12 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac			
	CC32-C-500-N	1 - 12 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac			






DIMMERABILI - CASAMBI INTEGRATO

DIMMABLE - CASAMBI INTEGRATED

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
    <small>DM-TU-WARM</small>	CC38-B-500-N	4 - 16 LED 2W 1 - 4 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac			
	CC60-B-500-N	10 - 22 LED 2W 1 - 5 LED 6W 1 - 3 LED 9W 1 - 2 LED 18W	@230Vac			
   <small>DM-TU-WARM</small>	10 - 22 LED 2W 1 - 5 LED 6W 1 - 3 LED 9W 1 - 2 LED 18W	@110Vac				





DIMMERABILI - DMX

DIMMABLE - DMX

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CC50-X-500-NL	1 - 15 LED 2W 1 - 8 LED 6W 1 - 4 LED 9W 1 - 2 LED 18W 1 - 10 LED 3x2W RGB	@230Vac			
	1 - 15 LED 2W 1 - 8 LED 6W 1 - 4 LED 9W 1 - 2 LED 18W 1 - 10 LED 3x2W RGB	@110Vac				

NON DIMMERABILI - FISSI - PER BATTERIA

NOT DIMMABLE - FIXED - FOR BATTERY







IP20	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC15-F-500-NB	1 - 3 LED 2W 1 LED 6W	12 Vdc			
	1 - 6 LED 2W 1 LED 6W 1 LED 9W	24 Vdc				
	1 - 12 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W	48 Vdc				

Alimentatori 500mA IP67

500mA LED driver IP67





NON DIMMERABILI

NOT DIMMABLE

IP67	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC14-F-500-PI	1 - 9 LED 2W 1 - 2 LED 6W 1 LED 9W	@230Vac		 Ø 44	
	CC20-F-500-PI	1 - 10 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac		 Ø 44	
	CC30-F-500-PI	9 - 18 LED 2W 3 - 4 LED 6W 2 - 3 LED 9W 1 LED 18W	@230Vac		 Ø 44	










DIMMERABILI - MULTIFUNZIONE - PUSH - 1-10

DIMMABLE - MULTIFUNCTION - PUSH - 1-10

IP67	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC20-M-500-P	1 - 10 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac		 Ø 60	 EAC
		1 - 8 LED 2W 1 - 2 LED 6W 1 LED 9W 1 LED 18W	@110Vac			




DIMMERABILI - DALI

DIMMABLE - DALI

IP67	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CC25-D-500-P	1 - 12 LED 2W 1 - 4 LED 6W 1 - 2 LED 9W 1 LED 18W	@230Vac		 Ø 60	 EAC 
		1 - 8 LED 2W 1 - 2 LED 6W 1 LED 9W	@110Vac			
	CC55-D-500-PI	1 - 14 LED 2W 1 - 4 LED 6W 1 - 3 LED 9W 1 LED 18W	@230Vac		 Ø 48	
		1 - 9 LED 2W 1 - 2 LED 6W 1 LED 9W	@110Vac			

DIMMERABILI - TAGLIO DI FASE (IGBT - TRIAC)

DIMMABLE - PHASE CUT (IGBT - TRIAC)

IP67	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC25-C-500-PI	8 - 13 LED 2W 2 - 4 LED 6W 2 LED 9W 1 LED 18W	@230Vac		 Ø 44	

POTENZIOMETRO
POTENTIOMETER












CODE
POT-M-REG-N

































Alimentatori 700mA IP20

700mA LED driver IP20

NON DIMMERABILI NOT DIMMABLE

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC20-F-700-N	1 - 9 LED 2W 1 - 2 LED 9W 1 LED 13W	@230Vac		 Ø 55	
	CC20-F-700-NI	1 LED 13W	@230Vac		 Ø 42	
	CC25-F-700-NT	7 - 11 LED 2W 2 LED 9W 1 LED 13W 1 LED 25W	@230Vac		 Ø 45	
	CC50-F-700-N	10 - 22 LED 2W 1 - 5 LED 9W 1 - 3 LED 13W 1 - 2 LED 25W	@230Vac		 Ø 84	
		10 - 12 LED 2W 1 - 3 LED 9W 1 - 3 LED 13W 1 LED 25W	@110Vac			

DIMMERABILI - MULTIFUNZIONE - PUSH - 1-10 DIMMABLE - MULTIFUNCTION - PUSH - 1-10





















IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
  	CC20-M-700-N	1 - 9 LED 2W 1 - 2 LED 9W 1 LED 13W	@230Vac		 Ø 55	
		1 - 4 LED 2W 1 LED 9W 1 LED 13W	@110Vac			
	CC30-M-700-NL	1 - 12 LED 2W 1 - 3 LED 9W 1 - 2 LED 13W 1 LED 25W	@230Vac		 Ø 54	
		1 - 12 LED 2W 1 - 3 LED 9W 1 - 2 LED 13W 1 LED 25W	@110Vac			
  	CC32-M-700-N	1 - 14 LED 2W 1 - 3 LED 9W 1 - 2 LED 13W 1 LED 25W	@230Vac		 Ø 72	
		1 - 7 LED 2W 1 LED 9W 1 LED 13W	@110Vac			
	CC40-M-700-NR	4 - 17 LED 2W 1 - 4 LED 9W 1 - 3 LED 13W 1 LED 25W	@230Vac		 Ø 64	
		4 - 17 LED 2W 1 - 4 LED 9W 1 - 3 LED 13W 1 LED 25W	@110Vac			
  	CC50-M-700-N	10 - 22 LED 2W 1 - 5 LED 9W 1 - 3 LED 13W 1 - 2 LED 25W	@230Vac		 Ø 84	
		10 - 12 LED 2W 1 - 3 LED 9W 1 - 3 LED 13W 1 LED 25W	@110Vac			
	CC50-M-700-NL	1 - 17 LED 2W 1 - 4 LED 9W 1 - 3 LED 13W 1 LED 25W	@230Vac		 Ø 84	
		1 - 17 LED 2W 1 - 4 LED 9W 1 - 3 LED 13W 1 LED 25W	@110Vac			

POTENZIOMETRO
POTENTIOMETER


























































CODE
POT-M-REG-N



DIMMERABILI - MULTIFUNZIONE - PUSH - 1-10
 DIMMABLE - MULTIFUNCTION - PUSH - 1-10

	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
  DIM-TO-WARM	CC36-A-700-N	4 - 15 LED 2W 1 - 4 LED 9W 1 - 2 LED 13W 1 LED 25W	@230Vac	 22 52 118	 Ø 55	   ERC 
   DIM-TO-WARM	CC50-A-700-N	10 - 22 LED 2W 1 - 5 LED 9W 1 - 3 LED 13W 1 - 2 LED 25W	@230Vac	 22 79 124	 Ø 84	  c   ERC   
		10 - 12 LED 2W 1 - 3 LED 9W 1 - 3 LED 13W 1 LED 25W	@110Vac			

DIMMERABILI - DALI
 DIMMABLE - DALI










	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
   DIM-TO-WARM	CC20-D-700-N	1 - 9 LED 2W 1 - 2 LED 9W 1 LED 13W	@230Vac	 22 52 118	 Ø 55	  c   * ERC
		1 - 4 LED 2W 1 LED 9W 1 LED 13W	@110Vac			
	CC25-D-700-NI	1 - 12 LED 2W 1 - 2 LED 9W 1 LED 13W	@230Vac	 25 33 164	 Ø 44	
	CC30-D-700-NL	1 - 12 LED 2W 1 - 3 LED 9W 1 - 2 LED 13W 1 LED 25W	@230Vac	 34 40 210	 Ø 54	  * c  
		1 - 12 LED 2W 1 - 3 LED 9W 1 - 2 LED 13W 1 LED 25W	@110Vac			
 	CC32-D-700-N	1 - 14 LED 2W 1 - 3 LED 9W 1 - 2 LED 13W 1 LED 25W	@230Vac	 21 67 103	 Ø 72	 c 
		1 - 7 LED 2W 1 LED 9W 1 LED 13W	@110Vac			
 	CC36-D-700-SP	1 - 2 LED 13W	@230Vac	 21 30 163	 Ø 37	
   DIM-TO-WARM	CC38-D-700-N	4 - 16 LED 2W 1 - 4 LED 9W 1 - 2 LED 13W 1 LED 25W	@230Vac	 30 44 147	 Ø 54	  * ERC 
   	CC50-D-700-N	10 - 22 LED 2W 1 - 5 LED 9W 1 - 3 LED 13W 1 - 2 LED 25W	@230Vac	 22 79 124	 Ø 84	  * c   * ERC 
		10 - 12 LED 2W 1 - 3 LED 9W 1 - 3 LED 13W 1 LED 25W	@110Vac			
	CC50-D-700-NL	1 - 17 LED 2W 1 - 4 LED 9W 1 - 3 LED 13W 1 LED 25W	@230Vac	 31 77 153	 Ø 84	  * c   * 
		1 - 17 LED 2W 1 - 4 LED 9W 1 - 3 LED 13W 1 LED 25W	@110Vac			

Alimentatori 700mA IP20

700mA LED driver IP20














DIMMERABILI - TAGLIO DI FASE (IGBT - TRIAC)

DIMMABLE - PHASE CUT (IGBT - TRIAC)

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
  	CC20-C-700-N	2 - 9 LED 2W 1 - 2 LED 9W 1 LED 13W	@230Vac			
	CC32-C-700-N	1 - 14 LED 2W 1 - 3 LED 9W 1 - 2 LED 13W 1 LED 25W	@230Vac			






DIMMERABILI - CASAMBI INTEGRATO

DIMMABLE - CASAMBI INTEGRATED

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
   	CC38-B-700-N	4 - 15 LED 2W 1 - 4 LED 9W 1 - 2 LED 13W 1 LED 25W	@230Vac			
	CC60-B-700-N	10 - 22 LED 2W 1 - 5 LED 9W 1 - 3 LED 13W 1 - 2 LED 25W	@230Vac			
  		10 - 12 LED 2W 1 - 3 LED 9W 1 - 3 LED 13W 1 LED 25W	@110Vac			





DIMMERABILI - DMX

DIMMABLE - DMX

IP20	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CC50-X-700-NL	1 - 17 LED 2W 1 - 4 LED 9W 1 - 3 LED 13W 1 LED 25W	@230Vac			
		1 - 17 LED 2W 1 - 4 LED 9W 1 - 3 LED 13W 1 LED 25W	@110Vac			

NON DIMMERABILI - FISSI - PER BATTERIA





NOT DIMMABLE - FIXED - FOR BATTERY

IP20	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC28-F-700-NB	1 - 3 LED 2W	12 Vdc			
		1 - 6 LED 2W 1 LED 9W 1 LED 13W	24 Vdc			
		1 - 12 LED 2W 1 - 3 LED 9W 1 - 2 LED 13W 1 LED 25W	48 Vdc			





Alimentatori 700mA IP67

700mA LED driver IP67









■ NON DIMMERABILI NOT DIMMABLE

IP67	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC14-F-700-PI	1 LED 9W 1 LED 13W	@230Vac		 Ø 44	
	CC20-F-700-PI	1 - 2 LED 9W 1 LED 13W	@230Vac		 Ø 44	




■ DIMMERABILI - MULTIFUNZIONE - PUSH - 1-10 DIMMABLE - MULTIFUNCTION - PUSH - 1-10

IP67	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC20-M-700-P	1 - 2 LED 9W 1 LED 13W	@230Vac		 Ø 60	 EAC
		1 LED 9W 1 LED 13W	@110Vac			

■ DIMMERABILI - DALI DIMMABLE - DALI

IP67	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC30-D-700-P	1 - 3 LED 9W 1 - 2 LED 13W	@230Vac		 Ø 60	 EAC 
		1 LED 9W 1 LED 13W	@110Vac			
	CC55-D-700-PI	1 - 4 LED 9W 1 - 3 LED 13W	@230Vac		 Ø 48	
		1 - 2 LED 9W 1 LED 13W	@110Vac			

■ DIMMERABILI - TAGLIO DI FASE (IGBT - TRIAC) DIMMABLE - PHASE CUT (IGBT - TRIAC)

IP67	CODE	MIN - MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CC25-C-700-PI	2 LED 9W 2 LED 13W	@230Vac		 Ø 44	

POTENZIOMETRO
POTENTIOMETER



























CODE
POT-M-REG-N



Alimentatori 24Vdc IP20

24Vdc LED driver IP20

■ NON DIMMERABILI NOT DIMMABLE





















IP20	CODE	MAX LED	V _{in}	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CV6-F-24-NI	6W - 0,25A max 3W - 0,12A max	220-240 Vac 100-120 Vac		 Ø 36	
	CV8-F-24-N	8W - 0,35A max 8W - 0,35A max	220-240 Vac 100-120 Vac		 Ø 42	  
	CV20-F-24-N	21W - 1,04A max 8,5W - 0,42A max	220-240 Vac 100-120 Vac		 Ø 60	
	CV35-F-24-NI	32W - 1,5A max	220-240 Vac		 Ø 39	
	CV60-F-24-NE*	52W - 2,5A max	100-120 Vac		 Ø 84 (3.3")	
	CV70-F-24-N	63W - 2,9A max	220-240 Vac		 Ø 70	
	CV75-F-24-NI	70W - 3,125A max 35W - 1,5A max	220-240 Vac 100-120 Vac		 Ø 49	
	CV100-F-24-NE*	83W - 4A max	100-120 Vac		 Ø 84 (3.3")	
	CV150-F-24-N	140W - 6,25A max	220-240 Vac		 Ø 80	

Alimentatori 24 Vdc IP20

24 Vdc LED driver IP20

























DIMMERABILI - MULTIFUNZIONE - PUSH - 1-10

DIMMABLE - MULTIFUNCTION - PUSH - 1-10

IP20	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CV20-M-24-N	18W - 0,83A max	220-240 Vac	 21 67 103	 Ø 72	 
		13W - 0,62A max	100-120 Vac			
 	CV50-M-24-NQ	55W - 2,5A max	220-240 Vac	 36 51 206	 Ø 60	
		37W - 1,66A max	100-120 Vac			
	CV60-M-24-NE*	52W - 2,5A max	100-120 Vac	 39 (1.53") 50 (1.97") 240 (9.45")	 Ø 84 (3.3")	 
	CV100-M-24-NE*	83W - 4A max	100-120 Vac	 33 (1.3") 76 (3") 291 (11.46")	 Ø 84 (3.3")	 

DIMMERABILI - DALI

DIMMABLE - DALI

IP20	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CV20-D-24-N	18W - 0,83A max	220-240 Vac	 21 67 103	 Ø 72	 
		13W - 0,62A max	100-120 Vac			
	CV25-D-24-NI	22W - 1A max	220-240 Vac	 25 38 164	 Ø 44	
	CV75-D-24-NI	67W - 3,125A max	220-240 Vac	 29 41 280	 Ø 49	
	CV100-D-24-NT	93W - 4,167A max	220-240 Vac	 30 43 295	 Ø 54	  
	CV150-D-24-NT	112W - 6,25A max	220-240 Vac	 30 43 325	 Ø 54	  

POTENZIOMETRO
POTENTIOMETER

CODE
POT-M-REG-N












*Non adatto al mercato UE, solo per utilizzo negli USA
Not suitable for the UE market, only for USA installation

Alimentatori 24 Vdc IP20

24 Vdc LED driver IP20






DIMMERABILI - TAGLIO DI FASE (IGBT - TRIAC)

DIMMABLE - PHASE CUT (IGBT - TRIAC)

IP20	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CV20-C-24-N	18W - 0,9A max	220-240 Vac		 Ø 56	   EAC
	CV45-C-24-N	37W - 1,87A max	220-240 Vac		 Ø 80	EAC













DIMMERABILI - CASAMBI INTEGRATO

DIMMABLE - CASAMBI INTEGRATED

IP20	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CV120-B-24-N	110W - 5A max	220-240 Vac		 Ø 80	 EAC

DIMMERABILI - DMX-DALI

DIMMABLE - DMX-DALI

IP20	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CV100-L-24-NL	94W - 1A (x4ch) max	220-240 Vac		 Ø 57	  
		94W - 1A (x4ch) max	100-120 Vac			
 	CV120-Y-24-N	115W - 5A max (100 su 1ch)	220-240 Vac		 Ø 80	 EAC

POTENZIOMETRO
POTENTIOMETER





















CODE
POT-M-REG-N




















Alimentatori 24Vdc IP67

24Vdc LED driver IP67

NON DIMMERABILI NOT DIMMABLE

IP67	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CV30-F-24-PI	26W - 1,5A max	220-240 Vac	 25 38 120	 Ø 44	
		13W - 0,6A max	100-120 Vac			
	CV75-F-24-PI	72W - 3,125A max	220-240 Vac	 28 40 280	 Ø 48	
	CV150-F-24-PI	140W - 6,250A max	220-240 Vac	 28 40 280	 Ø 48	
	CV70-F-24-P	63W - 2,90A max	220-240 Vac	 52 80 300	 Ø 85	ERC
	CV150-F-24-P	140W - 6,25A max	220-240 Vac	 52 80 300	 Ø 85	ERC
	CV240-F-24-PM	215W - 10A max	220-240 Vac	 39 68 245	 Ø 79	    ERC 
		215W - 10A max	100-120 Vac			
IP66	CV260-F-24-PW*	235W - 10,83A max	100-120 Vac	 39 (1.53") 50 (1.97") 240 (9.45")	 Ø 64 (2.52")	 CLASS P

DIMMERABILI - MULTIFUNZIONE - PUSH - 1-10 DIMMABLE - MULTIFUNCTION - PUSH - 1-10

IP67	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CV20-M-24-P	15W - 0,7A max	220-240 Vac	 26 54 122	 Ø 60	
		13W - 0,6A max	100-120 Vac			
	CV80-R-24-PM	72W - 3,4A max	220-240 Vac	 39 62 196	 Ø 74	   ERC  
		72W - 3,4A max	100-120 Vac			
	CV185-R-24-PM	165W - 7,8A max	220-240 Vac	 39 68 228	 Ø 79	 
		165W - 7,8A max	100-120 Vac			

POTENZIOMETRO
POTENTIOMETER

CODE
POT-M-REG-N









*Non adatto al mercato UE, solo per utilizzo negli USA
Not suitable for the UE market, only for USA installation

Alimentatori 24 Vdc IP67

24 Vdc LED driver IP67






DIMMERABILI - DALI

DIMMABLE - DALI

IP67	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CV25-D-24-PI	23W - 1A max	220-240 Vac		 Ø 48	
	CV75-D-24-PI	70W - 3,125A max	220-240 Vac		 Ø 48	

DIMMERABILI - TAGLIO DI FASE (IGBT - TRIAC)

DIMMABLE - PHASE CUT (IGBT - TRIAC)














IP66	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
 	CV80-C-24-P	66W - 3,33A max	220-240 Vac		 Ø 85	

Alimentatori 48Vdc IP20

48Vdc LED drivers IP20

NON DIMMERABILI

NOT DIMMABLE

IP20	CODE	MAX LED	Vin	DIMENSIONS (mm)	CUT-OUT	CERTIFICATIONS
	CV30-F-48-NI	27W - 0,6A max	220-240 Vac		 Ø 42	
	CV50-F-48-N	45W - 1A max	220-240 Vac		 Ø 70	
	CV70-F-48-N	64W - 1,45A max	220-240 Vac		 Ø 70	
	CV75-F-48-NI	70W - 1,55A max	220-240 Vac		 Ø 49	
		35W - 0,75A max	100-120 Vac			
	CV150-F-48-N	140W - 3A max	220-240 Vac		 Ø 80	

POTENZIOMETRO
POTENTIOMETER

CODE
POT-M-REG-N



DGA



DGA S.p.A.

Sede Legale e Amministrativa

Via Pietro Nenni 72/B
50013 Campi Bisenzio (FI) Italy
T +39 055 8986235
F +39 055 8986243

Milano Showroom

Corso Monforte 23
20122 Milano
milanoshowroom@dga.it
T +39 02 25064156

www.dga.it



Unità Produttiva

Via Gattinella, 18
50013 Campi Bisenzio (FI) Italy
T +39 055 5391520

Export Sales Department

export@dga.it
T +39 055 8945892
F +39 055 8986243

Ufficio Vendite Italia

commerciale@dga.it
T +39 055 8986235
F +39 055 8986243

Consulenza e Progettazione Illuminotecnica

lighting@dga.it
T +39 055 8986235
F +39 055 8986243

Assistenza Tecnica

ufficiotecnico@dga.it
T +39 055 8986235
F +39 055 8986243

Ufficio Comunicazione

communication@dga.it
T +39 055 8986235
F +39 055 8986243

dga.it