

ARCO 60 IP67 m frosted glass



LIGHT SOURCE

LED quantity	3
Power max	3 W
Total lumen output (3000K)	130 lm
Efficacy lm/W (3000K)	43 lm/W
LOR (3000K)	30%
CRI	>80
LED Temperature (K)	2700K-3000K-4000K-5000K-RGB
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	15°-30°-60°-Elliptical lens-Frosted glass
Beam direction	Fixed
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum, AISI 316 L
Finish	Aluminum Hard Coat Anodizing(Grey), AISI 316 L (Stainless Steel)
Available finishes	Grey, AISI 316 L Stainless Steel
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Accessories	-



ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection in	In series at 350mA, in parallel at 24Vdc
Class	III

MECHANICAL FEATURES

Dimensions (mm)	Ø60 x 77
Weight	370 gr
Mounting	Wall, ceiling, floor recessed
Cut-out (mm)	Ø45
Use	Outdoor

NOTES

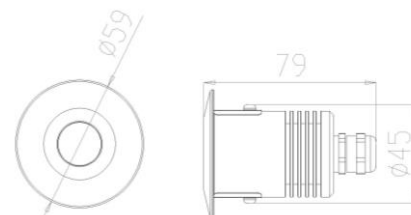

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
Frosted glass			
1.00	1.11	106	58
2.00	2.22	26	14
3.00	3.33	12	6
4.00	4.44	7	4
5.00	5.55	4	2