

# ARCO 60 IP67 m elliptical lens



## LIGHT SOURCE

LED quantity	3
Power max	3 W
Total lumen output (3000K)	251 lm
Efficacy lm/W (3000K)	84 lm/W
LOR (3000K)	58%
CRI	>80
LED Temperature (K)	2700K-3000K-4000K-5000K-RGB
Average operational life	50.000 hours

## OPTIC

Material	PMMA
Available optics	15°-30°-60°-Elliptical lens-Frosted glass
Beam direction	Fixed
Flux symmetry	Asymmetrical
Accessories	-

## LED FIXTURE

Material	Aluminum, AISI 316 L
Finish	Aluminum Hard Coat Anodizing(Grey), AISI 316 L (Stainless Steel)
Available finishes	Grey, AISI 316 L Stainless Steel
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Accessories	-



## ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection in	In series at 350mA, in parallel at 24Vdc
Class	III

## MECHANICAL FEATURES

Dimensions (mm)	Ø60 x 77
Weight	370 gr
Mounting	Wall, ceiling, floor recessed
Cut-out (mm)	Ø45
Use	Outdoor

## NOTES

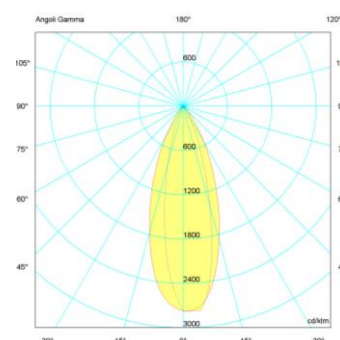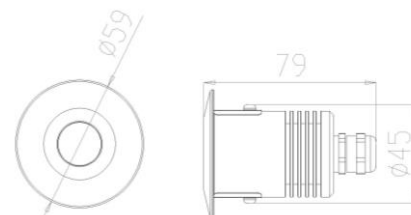

H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)
25°			
1.00	0.45	708	428
2.00	0.90	177	107
3.00	1.36	79	48
4.00	1.81	44	27
5.00	2.26	28	17
40°			
1.00	0.70	708	428
2.00	1.40	177	107
3.00	2.10	79	48
4.00	2.80	44	27
5.00	3.50	28	17