

## LIGHT SOURCE

LED quantity	1
Power max	30 W
Total lumen output (3000K)	2787 lm
Efficacy lm/W (3000K)	93 lm/W
LOR (3000K)	81%
CRI	>80 – >90
LED Temperature (K)	2700 K – 3000 K – 3000K CRI>90 – 4000 K
Average operational life	50.000 hours

## OPTIC

Material	Glass reflector
Available optics	10°-20°-30°-40°
Beam direction	Adjustable +/-90°, Rotating +/-355°
Flux symmetry	Symmetrical
Accessories	-

## LED FIXTURE

Material	Aluminum
Finish	Painted (Black, White, All White)
Available finishes	Black, White, All White
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	-

## ELECTRICAL FEATURES



Driver	Built-in driver, provided with Eurostandard track connector
Dimmable	No
For emergency lighting	Upon request
Connection	In parallel 220-240 Vac
Class	II

## MECHANICAL FEATURES

Dimensions (mm)	Ø75 x 150 (cylinder only)
Weight	760 gr
Mounting	Wall, ceiling mounting track
Cut-out (mm)	-
Use	Indoor

## NOTES

Available also a dimmable version through DALI signal or Casambi system (check the lenght of each adapter).

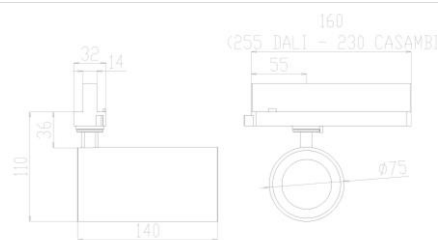

H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)
30°			
1.00	0.59	8406	5089
2.00	1.18	2102	1272
3.00	1.76	934	565
4.00	2.35	525	318
5.00	2.94	336	204