

LIGHT SOURCE

LED quantity	1
Power max	35 W
Total lumen output (3000K)	3341 lm
Efficacy lm/W (3000K)	95 lm/W
LOR (3000K)	74%
CRI	>80 – >90
LED Temperature (K)	2700 K – 3000 K – 3000K CRI>90 – 4000 K
Average operational life	50.000 hours

OPTIC

Material	Glass reflector
Available optics	10°-20°-30°-40°
Beam direction	Adjustable +/-90°, Rotating +/-355°
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum
Finish	Painted (Black, White, All White)
Available finishes	Black, White, All White
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	-

ELECTRICAL FEATURES



Driver	Built-in driver, provided with Eurostandard track connector
Dimmable	No
For emergency lighting	Upon request
Connection	In parallel 220-240 Vac
Class	II

MECHANICAL FEATURES

Dimensions (mm)	Ø75 x 150 (cylinder only)
Weight	760 gr
Mounting	Wall, ceiling mounting track
Cut-out (mm)	-
Use	Indoor

NOTES

Available also a dimmable version through DALI signal or Casambi system (check the lenght of each adapter).

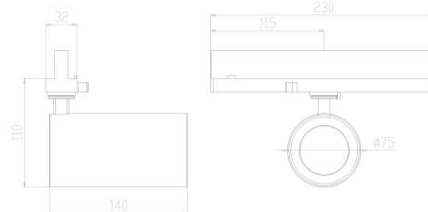

35W

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
20°			
1.00	0.37	15155	9933
2.00	0.74	3789	2483
3.00	1.12	1684	1104
4.00	1.49	947	621
5.00	1.86	606	397