

## LIGHT SOURCE

LED quantity	1		
Power max	1 W – 2 W – 3 W		
Total lumen output (3000K)	1W: 10° - 83 lm 30° - 67 lm 40° - 70 lm Ell. lens - 72 lm Frost.glass - 10 lm	2W: 10° - 113 lm 30° - 90 lm 40° - 95 lm Ell. lens - 98 lm Frost.glass - 11 lm	3W: Frost. Glass - 22 lm
Efficacy lm/W (3000K)	1W: 10° - 83 lm/W 30° - 67 lm/W 40° - 70 lm/W Ell. lens - 72 lm/W Frost. Glass - 10lm/W	2W: 10° - 57 lm/W 30° - 45 lm/W 40° - 48 lm/W Ell. lens - 49 lm/W Frost. Glass - 6lm/W	3W: Frost. Glass - 11 lm/W
CRI	>80		
LED Temperature	2200K – 2700K – 3000K – 4000K		
Average operational life	50.000 hours		

## OPTIC

Material	PMMA
Available optics	10° - 30° - 40° - elliptical lens - frosted glass
Beam direction	Fixed
Flux symmetry	Symmetrical, asymmetrical

## FIXTURE

Material	Aluminum, Tempered glass
Available finishes	Hard coat anodized: 3 - Gray 4 - Black Z - Champagne Gold
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	-

## ELECTRICAL FEATURES

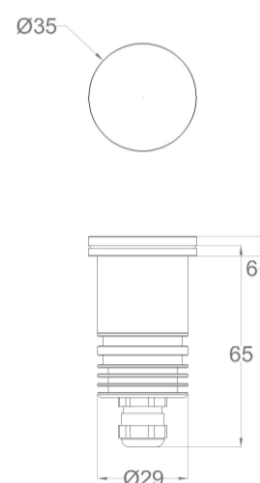
Driver	Remote
Dimmable	Push, 1-10V, DALI
Connection	In series at 350mA – 500mA
Class	III

## MECHANICAL FEATURES


Dimensions	Ø35 x 65 mm
Weight	90 gr
Installation	Wall, floor recessed
Cut-out	Ø38 mm (recessed box in aluminum with edge)
Use	Outdoor

## ACCESSORIES

Visors	-
Filters	-
Box/ Frame	Recessed box in aluminum with edge, recessed box in plastic with closure cap
Fixing system	-








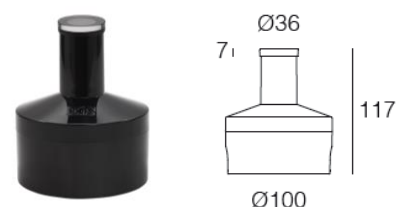A00485\_0 Recessed box in aluminum with edge (installation with aluminum trim)



A00480.40 Recessed box in plastic with closure cap (trimless installation)

## PHOTOMETRIC DATA

10° Lens – 2W	30° Lens – 2W	40° Lens – 2W	Elliptical lens – 2W																																																																																																																
																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>10°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.30</td><td>882</td><td>562</td></tr> <tr> <td><u>2.00</u></td><td>0.60</td><td>220</td><td>141</td></tr> <tr> <td><u>3.00</u></td><td>0.91</td><td>98</td><td>62</td></tr> <tr> <td><u>4.00</u></td><td>1.21</td><td>55</td><td>35</td></tr> <tr> <td><u>5.00</u></td><td>1.51</td><td>35</td><td>22</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>10°</b>				<u>1.00</u>	0.30	882	562	<u>2.00</u>	0.60	220	141	<u>3.00</u>	0.91	98	62	<u>4.00</u>	1.21	55	35	<u>5.00</u>	1.51	35	22	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>30°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.44</td><td>357</td><td>223</td></tr> <tr> <td><u>2.00</u></td><td>0.88</td><td>89</td><td>56</td></tr> <tr> <td><u>3.00</u></td><td>1.32</td><td>40</td><td>25</td></tr> <tr> <td><u>4.00</u></td><td>1.76</td><td>22</td><td>14</td></tr> <tr> <td><u>5.00</u></td><td>2.20</td><td>14</td><td>9</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>30°</b>				<u>1.00</u>	0.44	357	223	<u>2.00</u>	0.88	89	56	<u>3.00</u>	1.32	40	25	<u>4.00</u>	1.76	22	14	<u>5.00</u>	2.20	14	9	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>40°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.69</td><td>220</td><td>128</td></tr> <tr> <td><u>2.00</u></td><td>1.37</td><td>55</td><td>32</td></tr> <tr> <td><u>3.00</u></td><td>2.06</td><td>24</td><td>14</td></tr> <tr> <td><u>4.00</u></td><td>2.74</td><td>14</td><td>8</td></tr> <tr> <td><u>5.00</u></td><td>3.43</td><td>9</td><td>5</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>40°</b>				<u>1.00</u>	0.69	220	128	<u>2.00</u>	1.37	55	32	<u>3.00</u>	2.06	24	14	<u>4.00</u>	2.74	14	8	<u>5.00</u>	3.43	9	5	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>15°x30°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.51</td><td>505</td><td>322</td></tr> <tr> <td><u>2.00</u></td><td>1.03</td><td>126</td><td>81</td></tr> <tr> <td><u>3.00</u></td><td>1.54</td><td>56</td><td>36</td></tr> <tr> <td><u>4.00</u></td><td>2.05</td><td>32</td><td>20</td></tr> <tr> <td><u>5.00</u></td><td>2.57</td><td>20</td><td>13</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>15°x30°</b>				<u>1.00</u>	0.51	505	322	<u>2.00</u>	1.03	126	81	<u>3.00</u>	1.54	56	36	<u>4.00</u>	2.05	32	20	<u>5.00</u>	2.57	20	13
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>10°</b>																																																																																																																			
<u>1.00</u>	0.30	882	562																																																																																																																
<u>2.00</u>	0.60	220	141																																																																																																																
<u>3.00</u>	0.91	98	62																																																																																																																
<u>4.00</u>	1.21	55	35																																																																																																																
<u>5.00</u>	1.51	35	22																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>30°</b>																																																																																																																			
<u>1.00</u>	0.44	357	223																																																																																																																
<u>2.00</u>	0.88	89	56																																																																																																																
<u>3.00</u>	1.32	40	25																																																																																																																
<u>4.00</u>	1.76	22	14																																																																																																																
<u>5.00</u>	2.20	14	9																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>40°</b>																																																																																																																			
<u>1.00</u>	0.69	220	128																																																																																																																
<u>2.00</u>	1.37	55	32																																																																																																																
<u>3.00</u>	2.06	24	14																																																																																																																
<u>4.00</u>	2.74	14	8																																																																																																																
<u>5.00</u>	3.43	9	5																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>15°x30°</b>																																																																																																																			
<u>1.00</u>	0.51	505	322																																																																																																																
<u>2.00</u>	1.03	126	81																																																																																																																
<u>3.00</u>	1.54	56	36																																																																																																																
<u>4.00</u>	2.05	32	20																																																																																																																
<u>5.00</u>	2.57	20	13																																																																																																																
Frosted glass – 3W																																																																																																																			
																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>Frosted glass</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.70</td><td>36</td><td>21</td></tr> <tr> <td><u>2.00</u></td><td>1.41</td><td>9</td><td>5</td></tr> <tr> <td><u>3.00</u></td><td>2.11</td><td>4</td><td>2</td></tr> <tr> <td><u>4.00</u></td><td>2.81</td><td>2</td><td>1</td></tr> <tr> <td><u>5.00</u></td><td>3.51</td><td>1</td><td>1</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>Frosted glass</b>				<u>1.00</u>	0.70	36	21	<u>2.00</u>	1.41	9	5	<u>3.00</u>	2.11	4	2	<u>4.00</u>	2.81	2	1	<u>5.00</u>	3.51	1	1																																																																																							
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>Frosted glass</b>																																																																																																																			
<u>1.00</u>	0.70	36	21																																																																																																																
<u>2.00</u>	1.41	9	5																																																																																																																
<u>3.00</u>	2.11	4	2																																																																																																																
<u>4.00</u>	2.81	2	1																																																																																																																
<u>5.00</u>	3.51	1	1																																																																																																																

## NOTES

Hex louver included.

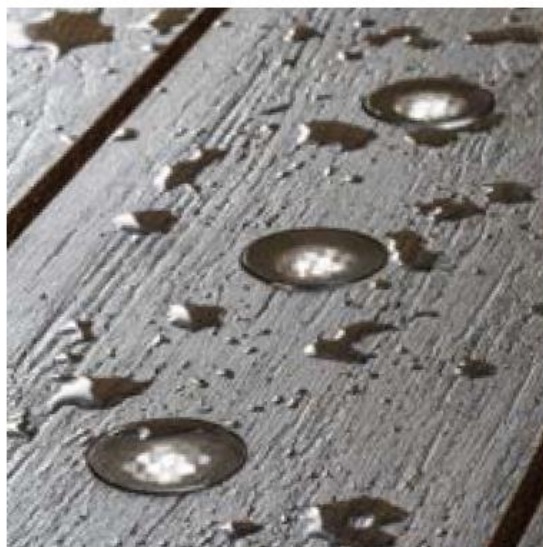
Recessed box is necessary for installing the fixture correctly.

Provided with 100 cm neoprene cable.



### INSTALLATION WITH ALUMINUM TRIM

Aluminum flush to floor recessed box with small edge.



### TRIMLESS INSTALLATION

Recessed box with removable cap, designed to make the glass be flush to the ground.