

## LIGHT SOURCE

LED quantity	1	
Power max	1 W x2 – 2 Wx2	
Total lumen output (3000K CRI>90)	1Wx2: 10° - 74 lm x2 25° - 80 lm x2 40° - 79 lm x2 60° - 63 lm x2	2Wx2: 10° - 100 lm x2 25° - 107 lm x2 40° - 106 lm x2 60° - 84 lm
Efficacy lm/W (3000K CRI>90)	1W: 10° - 74 lm/W 25° - 80 lm/W 40° - 79 lm/W 60° - 63 lm/W	2W: 10° - 50 lm/W 25° - 53 lm/W 40° - 53 lm/W 60° - 42 lm/W
CRI	>80 – >90	
LED Temperature	2200K - 2700K CRI>90 – 3000K CRI>90 – 4000K – 5000K	
Average operational life	50.000 hours	

## OPTIC

Material	PMMA
Available optics	10° - 25° - 40° - 60°
Beam direction	Adjustable +/-90°, rotating +/-355°
Flux symmetry	Symmetrical

## FIXTURE

Material	Aluminum
Available finishes	Powder coated: 7 - White Hard coat anodized: 4 - Black B - Dark bronze
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Track connector, Removing tool

## ELECTRICAL FEATURES



Driver	Remote
Dimmable	DALI
Connection	In parallel at 48Vdc
Class	III

## MECHANICAL FEATURES

Dimensions (body)	Ø18 x 30 mm (43 mm with visor)
Weight	52 gr
Installation	Track mounting
Cut-out	-
Use	Indoor

## ACCESSORIES

Visors	Visor included in <i>Mini Tini with visor</i> version
Filters	-
Box/ Frame	-
Fixing system	-

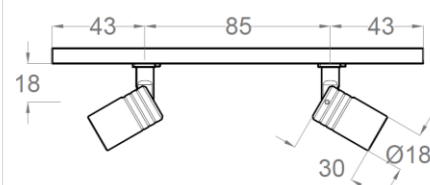

## PHOTOMETRIC DATA


10° Lens – 2W	25° Lens – 2W	40° Lens – 2W	60° Lens – 2W																																																																																																
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><u>1.00</u></td><td>0.23</td><td>1267</td><td>779</td></tr> <tr> <td><u>2.00</u></td><td>0.45</td><td>317</td><td>195</td></tr> <tr> <td><u>3.00</u></td><td>0.68</td><td>141</td><td>87</td></tr> <tr> <td><u>4.00</u></td><td>0.90</td><td>79</td><td>49</td></tr> <tr> <td><u>5.00</u></td><td>1.13</td><td>51</td><td>31</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<u>1.00</u>	0.23	1267	779	<u>2.00</u>	0.45	317	195	<u>3.00</u>	0.68	141	87	<u>4.00</u>	0.90	79	49	<u>5.00</u>	1.13	51	31	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><u>1.00</u></td><td>0.33</td><td>699</td><td>449</td></tr> <tr> <td><u>2.00</u></td><td>0.66</td><td>175</td><td>112</td></tr> <tr> <td><u>3.00</u></td><td>0.99</td><td>78</td><td>50</td></tr> <tr> <td><u>4.00</u></td><td>1.32</td><td>44</td><td>28</td></tr> <tr> <td><u>5.00</u></td><td>1.65</td><td>28</td><td>18</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<u>1.00</u>	0.33	699	449	<u>2.00</u>	0.66	175	112	<u>3.00</u>	0.99	78	50	<u>4.00</u>	1.32	44	28	<u>5.00</u>	1.65	28	18	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><u>1.00</u></td><td>0.50</td><td>337</td><td>203</td></tr> <tr> <td><u>2.00</u></td><td>1.00</td><td>84</td><td>51</td></tr> <tr> <td><u>3.00</u></td><td>1.50</td><td>37</td><td>23</td></tr> <tr> <td><u>4.00</u></td><td>2.00</td><td>21</td><td>13</td></tr> <tr> <td><u>5.00</u></td><td>2.50</td><td>13</td><td>8</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<u>1.00</u>	0.50	337	203	<u>2.00</u>	1.00	84	51	<u>3.00</u>	1.50	37	23	<u>4.00</u>	2.00	21	13	<u>5.00</u>	2.50	13	8	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><u>1.00</u></td><td>1.14</td><td>79</td><td>40</td></tr> <tr> <td><u>2.00</u></td><td>2.29</td><td>20</td><td>10</td></tr> <tr> <td><u>3.00</u></td><td>3.43</td><td>9</td><td>4</td></tr> <tr> <td><u>4.00</u></td><td>4.57</td><td>5</td><td>3</td></tr> <tr> <td><u>5.00</u></td><td>5.72</td><td>3</td><td>2</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<u>1.00</u>	1.14	79	40	<u>2.00</u>	2.29	20	10	<u>3.00</u>	3.43	9	4	<u>4.00</u>	4.57	5	3	<u>5.00</u>	5.72	3	2
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																
<u>1.00</u>	0.23	1267	779																																																																																																
<u>2.00</u>	0.45	317	195																																																																																																
<u>3.00</u>	0.68	141	87																																																																																																
<u>4.00</u>	0.90	79	49																																																																																																
<u>5.00</u>	1.13	51	31																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																
<u>1.00</u>	0.33	699	449																																																																																																
<u>2.00</u>	0.66	175	112																																																																																																
<u>3.00</u>	0.99	78	50																																																																																																
<u>4.00</u>	1.32	44	28																																																																																																
<u>5.00</u>	1.65	28	18																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																
<u>1.00</u>	0.50	337	203																																																																																																
<u>2.00</u>	1.00	84	51																																																																																																
<u>3.00</u>	1.50	37	23																																																																																																
<u>4.00</u>	2.00	21	13																																																																																																
<u>5.00</u>	2.50	13	8																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																
<u>1.00</u>	1.14	79	40																																																																																																
<u>2.00</u>	2.29	20	10																																																																																																
<u>3.00</u>	3.43	9	4																																																																																																
<u>4.00</u>	4.57	5	3																																																																																																
<u>5.00</u>	5.72	3	2																																																																																																
UGR=10	UGR=13	UGR=21	UGR=29																																																																																																

## NOTES


Compatible with 48Vdc Micro Track:




APPLIQUE MOUNTING



RECESSED MOUNTING



SUSPENDED MOUNTING



Please consider 1 DALI address for each Mini Tini B 48V.