




# MIRUM Qm2


-  IP40
-  Class III
-  Incasso a parete, soffitto  
Wall, ceiling recessed
-  Collegare in serie 180mA o 250mA o 350mA  
Connect in series at 180mA or 250mA or 350mA
-  610 gr
-  88x168 mm
-  Altamente riciclabile  
Highly recyclable



## MIRUM Qm2

STRUTTURA FRAME	A00876_0	Nell'ordine richiedere 1 Struttura ogni 2 Moduli Mirum Q Please specify in the purchase order 1 Frame each 2 Mirum Q Modules	<b>H</b> Nero - Black <b>7</b> Bianco - White
-----------------	----------	---	--

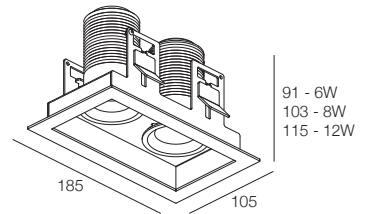


MODULO - MODULE MIRUM Q	6W 180mA	8W 250mA	12W 350mA	12W 350mA	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	500lm	650lm	900lm	1000lm (at source)		
 15° Reflector	7A4290_ _	7A4291_ _	7A4292_ _		<b>H</b> Nero - Black <b>7</b> Bianco - White	<b>Y</b> 2700K <b>6</b> 3000K <b>W</b> 3000K CRI > 90 <b>9</b> 4000K <b>T</b> 3000K CRI > 90 DIM-TO-WARM
 25° Reflector	7G4290_ _	7G4291_ _	7G4292_ _			
 40° Reflector	744290_ _	744291_ _	744292_ _	744293_ T DIM-TO-WARM		



ALIMENTATORI CONSIGLIATI (non inclusi)  
SUGGESTED DRIVERS (not included)

180mA	CC20-F-180-N
250mA	CC9-F-250-N
350mA	CC20-F-350-N
350mA	CC20-A-350-N DIM-TO-WARM

ACCESSORI  
ACCESSORIES

			
Filtro Ellittico Linear Filter	Nido D'ape Hex Louver	Filtro Prismatico Prismatic Filter	Filtro Correttivo Softening Lens
IP40 A01164.80	A01162.40	A01165.80	A01163.80
Only for 15° reflector			

EXAMPLE CODE COMPOSITION  
123456\_

