


# MIRUM QF2

- IP40
- Class III
- Incasso a parete, soffitto  
Wall, ceiling recessed
- Installazione a filo  
Trimless installation
- Collegare in serie 180mA o 250mA o 350mA  
Connect in series at 180mA or 250mA or 350mA
- 465 gr
- 80x160 mm
- Altamente riciclabile  
Highly recyclable

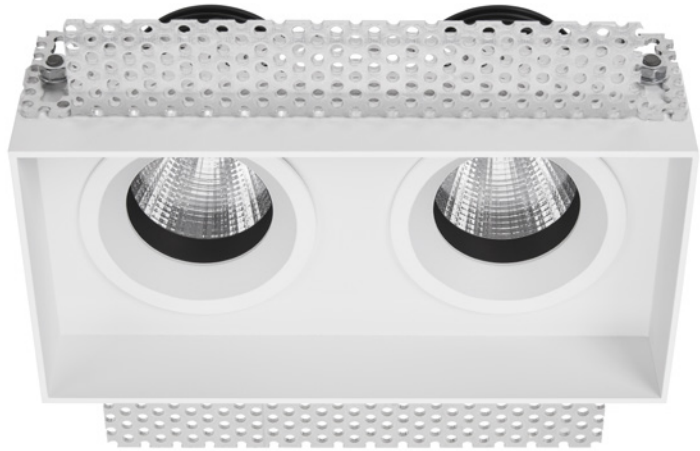


## MIRUM QF2

STRUTTURA FRAME		Nell'ordine richiedere 1 Struttura ogni 2 Moduli Mirum Q Please specify in the purchase order 1 Frame each 2 Mirum Q Modules				Finiture Finish	
A00877._ 0						■ H Nero - Black □ 7 Bianco - White	
MODULO - MODULE MIRUM Q	6W 180mA	8W 250mA	12W 350mA	12W 350mA	Finiture Finish	Colore LED LED Colour	
Lumen Output 3000K	500lm	650lm	900lm	1000lm (at source)			
15° Reflector	7A4290._ _	7A4291._ _	7A4292._ _		■ H Nero - Black □ 7 Bianco - White	■ Y 2700K ■ 6 3000K ■ W 3000K CRI > 90 ■ 9 4000K ■ T 3000K CRI > 90 DIM-TO-WARM	
25° Reflector	7G4290._ _	7G4291._ _	7G4292._ _				
40° Reflector	744290._ _	744291._ _	744292._ _	744293._ T DIM-TO-WARM			



+

MIRUM Q  
x2

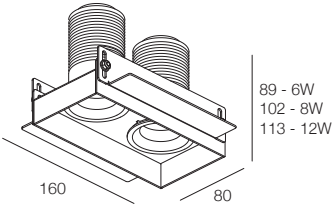

ALIMENTATORI CONSIGLIATI (non inclusi)  
SUGGESTED DRIVERS (not included)

180mA	CC20-F-180-N
250mA	CC9-F-250-N
350mA	CC20-F-350-N
350mA	CC20-A-350-N DIM-TO-WARM

ACCESSORI  
ACCESSORIES

IP40	Filtro Ellittico Linear Filter A01164.80	Nido D'ape Hex Louver A01162.40	Filtro Prismatico Prismatic Filter A01165.80	Filtro Correttivo Softening Lens A01163.80
Only for 15° reflector				

EXAMPLE CODE COMPOSITION  
123456.

LED COLOUR  
FINISH