

## MIRUM QR



IP40




Class III

Incasso a parete, soffitto  
Wall, ceiling recessedCollegare in serie 180mA o 250mA o 350mA  
Connect in series at 180mA or 250mA or 350mA

605 gr



108x108 mm

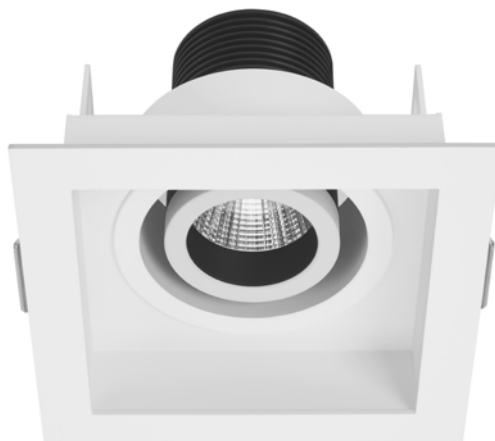Altamente riciclabile  
Highly recyclable

**Massima flessibilità  
progettuale  
Sottile flangia a vista  
Ideale per ampi spazi**

Maximum design flexibility  
Thin flange at sight  
Ideal for large spaces

## ■ MIRUM QR

Finiture  
FinishSTRUTTURA  
FRAME

A00560.\_ 0

Nell'ordine richiedere 1 Struttura  
per ogni Modulo Mirum QR  
Please specify in the purchase order  
1 Frame for each Mirum QR Modules

■ H Nero - Black  
□ 7 Bianco - White

MODULO - MODULE  
MIRUM QR6W  
180mA8W  
250mA12W  
350mA12W  
350mA  
1000lm (at source)Finiture  
FinishColore LED  
LED Colour

Lumen Output 3000K 500lm 650lm 900lm 1000lm (at source)

15° Reflector

7A4294.\_ \_

7A4295.\_ \_

7A4296.\_ \_

25° Reflector

7G4294.\_ \_

7G4295.\_ \_

7G4296.\_ \_

40° Reflector

744294.\_ \_

744295.\_ \_

744296.\_ \_

744297.\_ T  
DIM-TO-WARM

■ H Nero - Black  
□ 7 Bianco - White


■ Y 2700K  
■ 6 3000K  
■ W 3000K CRI > 90  
■ 9 4000K  
■ T 3000K CRI > 90  
DIM-TO-WARM



MIRUM QR



+/- 355°



92 - 6W  
105 - 8W  
116 - 12W

+/- 25°

ALIMENTATORI CONSIGLIATI (non inclusi)  
SUGGESTED DRIVERS (not included)

180mA CC20-F-180-N  
250mA CC9-F-250-N  
350mA CC20-F-350-N  
350mA CC20-A-350-N  
DIM-TO-WARM

ACCESSORI  
ACCESSORIESFiltro Ellittico  
Linear Filter

IP40

A01164.80

Only for 15° reflector

Nido D'ape  
Hex Louver

A01162.40

Filtro Prismatico  
Prismatic Filter

A01165.80

Filtro Correttivo  
Softening Lens

A01163.80

EXAMPLE CODE COMPOSITION  
123456.

LED COLOUR  
FINISH