

MIRUM QR2



IP40



Class III

Incasso a parete, soffitto
Wall, ceiling recessedCollegare in serie 180mA o 250mA o 350mA
Connect in series at 180mA or 250mA or 350mA

605 gr



108x208 mm

Altamente riciclabile
Highly recyclable

■ MIRUM QR2

Finiture
FinishSTRUTTURA
FRAME

A00561._ 0

Nell'ordine richiedere 1 Struttura
ogni 2 Moduli Mirum QR
Please specify in the purchase order
1 Frame each 2 Mirum QR Modules■ H Nero - Black
□ 7 Bianco - WhiteMODULO - MODULE
MIRUM QR6W
180mA8W
250mA12W
350mA12W
350mA
1000lm (at source)Finiture
FinishColore LED
LED Colour

Lumen Output 3000K 500lm 650lm 900lm

15° Reflector

7A4294._ _

7A4295._ _

7A4296._ _

25° Reflector

7G4294._ _

7G4295._ _

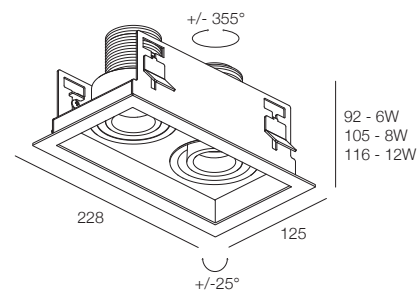
7G4296._ _

40° Reflector

744294._ _

744295._ _

744296._ _

744297. T
DIMA-TO-WARM■ H Nero - Black
□ 7 Bianco - White■ Y 2700K
■ 6 3000K
■ W 3000K CRI > 90
■ 9 4000K
■ T 3000K CRI > 90
DIMA-TO-WARM+
MIRUM QR
x2ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)180mA CC20-F-180-N
250mA CC9-F-250-N
350mA CC20-F-350-N
350mA CC20-A-350-N
DIMA-TO-WARMACCESSORI
ACCESSORIESFiltro Ellittico
Linear Filter
A01164.80Nido D'ape
Hex Louver
A01162.40Filtro Prismatico
Prismatic Filter
A01165.80Filtro Correttivo
Softening Lens
A01163.80

Only for 15° reflector

EXAMPLE CODE COMPOSITION
123456.LED COLOUR
FINISH