





NANO TINI














-  IP40
-  Class III
-  Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting
-  Collegare in serie 350mA o 500mA
Connect in series at 350mA or 500mA
-  10 gr
-  Altamente riciclabile
Highly recyclable



**Dimensioni ridottissime
Nano lenti proprietarie
Snoot antiabbagliamento**

Very small dimensions
DGA proprietary lenses
Anti-dazzle snoot


NANO TINI

	1W 350mA	2W* 500mA	Finiture Finish	Colore LED LED Colour	Elementi di fissaggio Fixing element
Lumen Output 3000K CRI > 90	50lm	80lm			
 20° Lens	784015._._.	784016._._.	 1 Cromo Lucido Shiny Chrome	 U 2200K	G Ghiera - Ring nut
 30° Lens	764015._._.	764016._._.	 3 Grigio - Gray	 X 2700K CRI > 90	M Magnetico - Magnetic
 50° Lens	7D4015._._.	7D4016._._.	 4 Nero - Black	 W 3000K CRI > 90	P Applique - Applique
			 E Ottone Integrale Massive Brass	 K 3500K CRI > 90	S Screw base - Screw base
			 I Oro Lucido Gold Chrome	 D 4000K CRI > 90	J Jack - Jack

* Montare solo su superfici metalliche
To be mounted on metal surfaces only



Ghiera
Ring nut
G




Magnetico
Magnetic
M



Applique
Applique
P



Screw base
Screw base
S




Jack
Jack
J

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

350mA CC20-F-350-N
500mA CC20-F-500-N

ELEMENTI DI FISSAGGIO FIXING ELEMENTS

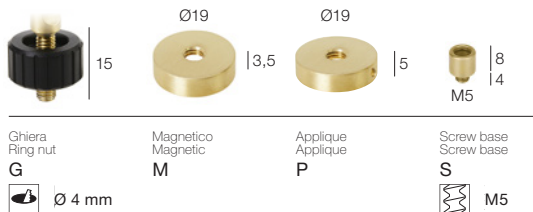

ACCESSORI ACCESSORIES



EXAMPLE CODE COMPOSITION
123456.

