





NOTA R











-  IP40
-  Class III
-  Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting
-  Collegare in serie 300mA
Connect in series at 300mA
-  62 gr (L = 35 cm)
-  12x12 mm
-  Altamente riciclabile
Highly recyclable




Quattro ottiche disponibili
Luce senza ostacoli
Orientabilità +/- 25°


Four optics available
Light without obstacles
Orientability +/- 25°

NOTA R

	4W 300mA	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	300lm		
 20° Lens	NR81-_____	 3 Grigio - Gray	 Y 2700K
 40° Lens	NR41-_____	 4 Nero - Black	 6 3000K
 50° Lens	NRD1-_____	 T Titanio - Titanium	 W 3000K CRI > 90
 Lente ellittica Elliptical lens	NR71-_____	 Z Champagne Gold	 9 4000K
			 1 5000K

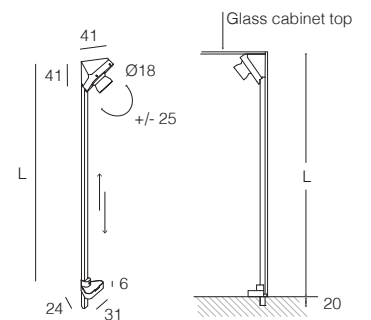

NOTA R
50° Lens

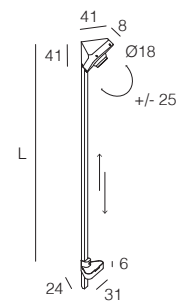

L = lunghezza astina (cm)
pole length (cm)

010 015 020 025 030 035 040 045 050

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

300mA CC20-F-300-N

EXAMPLE CODE COMPOSITION
12345-
Pole length in cm min 010 - max 050 LED COLOUR FINISH