

# ODINO Qd IP67 SOLOVETRO 30°



## LIGHT SOURCE

LED quantity	1
Power max	6 W
Total lumen output (3000K)	116 lm
Efficacy lm/W (3000K)	20 lm/W
LOR (3000K)	-
CRI	>80
LED Temperature (K)	3000K
Average operational life	50.000 hours

## OPTIC

Material	PMMA
Available optics	30°, 50°
Beam direction	Fixed
Flux symmetry	Symmetrical
Accessories	-

## LED FIXTURE

Material	Aluminum, Tempered glass
Finish	Aluminum Hard Coat Anodizing (Black, Grey, Champagne Gold)
Available finishes	Black, Grey, Champagne Gold
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Accessories	Recessed box : - in aluminum with edge - in plastic with closure cap

## ELECTRICAL FEATURES



Driver	<b>DRIVERLESS</b> <i>Technology</i>
Dimmable	No
For emergency lighting	-
Connection	At 220-240 Vac
Class	I

## MECHANICAL FEATURES

Dimensions (mm):	59 x 59 x 100
Weight	400 gr
Mounting	Wall, Floor recessed
Cut-out (mm)	Ø62 (with A00645.40)
Use	Outdoor

## NOTES

Hex louver included

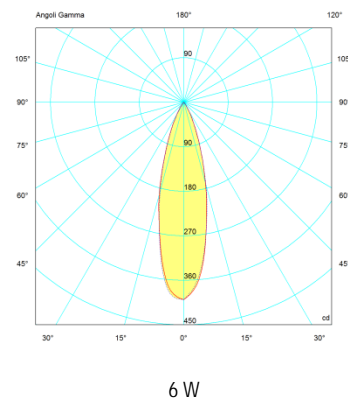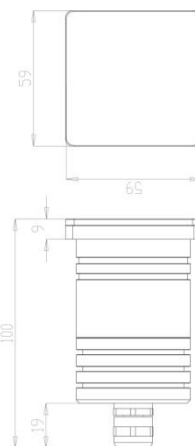

H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)
30°			
1.00	0.49	399	244
2.00	0.99	100	61
3.00	1.48	44	27
4.00	1.98	25	15
5.00	2.47	16	10