

LIGHT SOURCE

LED quantity	56
Power max	6 W
Total lumen output (3000K)	280 lm
Efficacy lm/W (3000K)	47 lm/W
LOR (3000K)	-
CRI	>80 - >90
LED Temperature (K)	2700K - 3000K – 3000K CRI>90 - 4000K
Average operational life	50.000 hours

OPTIC

Material	Polycarbonate
Available optics	Diffused emission
Beam direction	Fixed
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum, Tempered glass
Finish	Painted (Gold, Black, Agate gray, Intense Bronze, White, Oyster white)
Available finishes	Gold, Black, Agate gray, Intense Bronze, White, Oyster white
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	-

ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection	In parallel at 24Vdc
Class	III



MECHANICAL FEATURES

Dimensions (mm)	Ø99 x 50
Weight	510 gr
Mounting	Wall, ceiling
Cut out (mm)	-
Use	Indoor

NOTES



design by **Valerio Sommella & Anonima Luci**

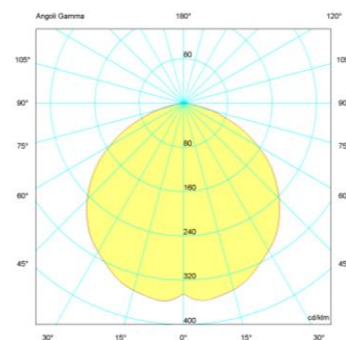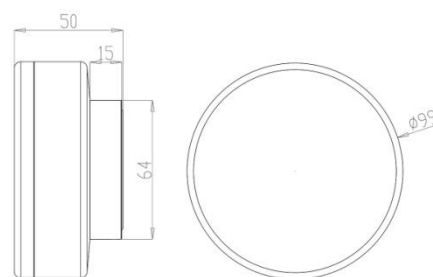

6W

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
113°			
0.60	1.80	276	69
1.20	3.60	69	17
1.80	5.39	31	8
2.40	7.19	17	4
3.00	8.99	11	3