

## LIGHT SOURCE

LED quantity	1		
Power max	3 W – 6 W – 9 W		
Total lumen output (3000K)	3W: 3° - 174 lm	6W: 10° - 392 lm 30° - 314 lm 50° - 242 lm	9W: 10° - 488 lm 30° - 388 lm 50° - 297 lm
Efficacy lm/W (3000K)	3W: 3° - 58 lm/W	6W: 10° - 65 lm/W 30° - 52 lm/W 50° - 40 lm/W	9W: 10° - 54 lm/W 30° - 43 lm/W 50° - 33 lm/W
CRI	>80 – >90		
LED Temperature	2700K – 3000K – 3000K CRI>90 – 3500K - 4000K		
Average operational life	50.000 hours		

## OPTIC

Material	PMMA
Available optics	3° - 10° - 30° - 50°
Beam direction	Adjustable: Tilting +/-90°, Rotating +/-355°
Flux symmetry	Symmetrical

## FIXTURE

Material	Aluminum
Available finishes	Powder coated: 7 – White H - Black Hard coat anodized: B - Dark bronze
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Track connector, Removing tool

## ELECTRICAL FEATURES



Driver	Remote
Dimmable	DALI
For emergency lighting	Upon request
Connection	In parallel at 48Vdc
Class	III

## MECHANICAL FEATURES





Dimensions (body)	Ø40 x 90 mm
Weight	190 gr
Installation	Track mounting
Cut-out	-
Use	Indoor

## ACCESSORIES

Visors	-
Filters	Upon request
Box/ Frame	-
Fixing system	-

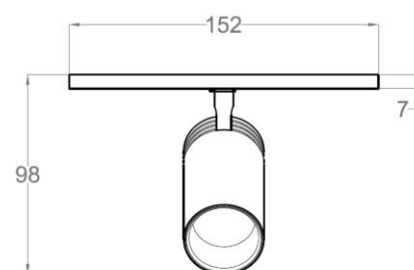

# PHOTOMETRIC DATA


3° Lens – 3W	10° Lens – 9W	30° Lens – 9W	50° Lens – 9W																																																																																																																
																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><u>3°</u></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.08</td><td>14885</td><td>9092</td></tr> <tr> <td><u>2.00</u></td><td>0.15</td><td>3721</td><td>2273</td></tr> <tr> <td><u>3.00</u></td><td>0.23</td><td>1654</td><td>1010</td></tr> <tr> <td><u>4.00</u></td><td>0.30</td><td>930</td><td>568</td></tr> <tr> <td><u>5.00</u></td><td>0.38</td><td>595</td><td>364</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<u>3°</u>				<u>1.00</u>	0.08	14885	9092	<u>2.00</u>	0.15	3721	2273	<u>3.00</u>	0.23	1654	1010	<u>4.00</u>	0.30	930	568	<u>5.00</u>	0.38	595	364	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><u>10°</u></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.17</td><td>9967</td><td>6084</td></tr> <tr> <td><u>2.00</u></td><td>0.35</td><td>2492</td><td>1521</td></tr> <tr> <td><u>3.00</u></td><td>0.52</td><td>1107</td><td>676</td></tr> <tr> <td><u>4.00</u></td><td>0.69</td><td>623</td><td>380</td></tr> <tr> <td><u>5.00</u></td><td>0.87</td><td>399</td><td>243</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<u>10°</u>				<u>1.00</u>	0.17	9967	6084	<u>2.00</u>	0.35	2492	1521	<u>3.00</u>	0.52	1107	676	<u>4.00</u>	0.69	623	380	<u>5.00</u>	0.87	399	243	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><u>30°</u></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.40</td><td>2198</td><td>1354</td></tr> <tr> <td><u>2.00</u></td><td>0.80</td><td>550</td><td>339</td></tr> <tr> <td><u>3.00</u></td><td>1.20</td><td>244</td><td>150</td></tr> <tr> <td><u>4.00</u></td><td>1.60</td><td>137</td><td>865</td></tr> <tr> <td><u>5.00</u></td><td>2.00</td><td>88</td><td>44</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<u>30°</u>				<u>1.00</u>	0.40	2198	1354	<u>2.00</u>	0.80	550	339	<u>3.00</u>	1.20	244	150	<u>4.00</u>	1.60	137	865	<u>5.00</u>	2.00	88	44	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><u>50°</u></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.57</td><td>822</td><td>484</td></tr> <tr> <td><u>2.00</u></td><td>1.15</td><td>205</td><td>121</td></tr> <tr> <td><u>3.00</u></td><td>1.72</td><td>91</td><td>54</td></tr> <tr> <td><u>4.00</u></td><td>2.30</td><td>51</td><td>30</td></tr> <tr> <td><u>5.00</u></td><td>2.87</td><td>33</td><td>19</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<u>50°</u>				<u>1.00</u>	0.57	822	484	<u>2.00</u>	1.15	205	121	<u>3.00</u>	1.72	91	54	<u>4.00</u>	2.30	51	30	<u>5.00</u>	2.87	33	19
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<u>3°</u>																																																																																																																			
<u>1.00</u>	0.08	14885	9092																																																																																																																
<u>2.00</u>	0.15	3721	2273																																																																																																																
<u>3.00</u>	0.23	1654	1010																																																																																																																
<u>4.00</u>	0.30	930	568																																																																																																																
<u>5.00</u>	0.38	595	364																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<u>10°</u>																																																																																																																			
<u>1.00</u>	0.17	9967	6084																																																																																																																
<u>2.00</u>	0.35	2492	1521																																																																																																																
<u>3.00</u>	0.52	1107	676																																																																																																																
<u>4.00</u>	0.69	623	380																																																																																																																
<u>5.00</u>	0.87	399	243																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<u>30°</u>																																																																																																																			
<u>1.00</u>	0.40	2198	1354																																																																																																																
<u>2.00</u>	0.80	550	339																																																																																																																
<u>3.00</u>	1.20	244	150																																																																																																																
<u>4.00</u>	1.60	137	865																																																																																																																
<u>5.00</u>	2.00	88	44																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<u>50°</u>																																																																																																																			
<u>1.00</u>	0.57	822	484																																																																																																																
<u>2.00</u>	1.15	205	121																																																																																																																
<u>3.00</u>	1.72	91	54																																																																																																																
<u>4.00</u>	2.30	51	30																																																																																																																
<u>5.00</u>	2.87	33	19																																																																																																																
UGR=9	UGR=11	UGR=12	UGR=8																																																																																																																

# NOTES


Compatible with 48Vdc Micro Track:



APPLIQUE MOUNTING



RECESSED MOUNTING



Please consider 1 DALI address for each Tono B 48V.