

LIGHT SOURCE

LED quantity	1
Power max	4 W
Total lumen output (3000K)	110 lm (40°) – 41 lm (10°)
Efficacy lm/W (3000K)	28 lm/W(40°) - 11 lm/W(10°)
LOR (3000K)	25%(40°) – 10%(10°)
CRI	>80 - >90
LED Temperature (K)	2700-3000-4000-5000
Average operational life	50.000 hours

OPTIC

Material	Glass
Available optics	Zoom from 10° to 40°
Beam direction	Adjustable
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum
Finish	Aluminum Hard Coat Anodizing(Black, Grey), Painted (White)
Available finishes	Black, Grey, White
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	-



ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	Upon Request
Connection in	In series at 350mA
Class	III


MECHANICAL FEATURES

Dimensions (mm)	Ø65 x 61
Weight	170 gr
Mounting	Wall, Ceiling recessed
Cut-out (mm)	Ø59
Use	Indoor

NOTES

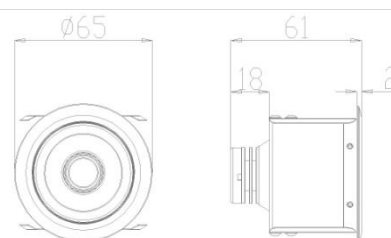

4W 10°



4W 40°