

READING LIGHT FLEX P

IP40

Class II

Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting

Alimentazione integrata, collegare alla tensione di rete 100-240Vac
Built-in driver, connect directly to the line voltage to 100-240Vac


280 gr

Altamente riciclabile
Highly recyclable



READING LIGHT FLEX P 250

| | 1W 100-240Vac | 2W 100-240Vac | Finiture Finish | Colore LED LED Colour |
|-------------|------------------|------------------|--------------------------------|---|
| Lumen 3000K | 100lm | 150lm | | |
| 10° Lens | 734244._ _ | 734245._ _ | 1 Cromo Lucido Shiny Chrome | U 2200K X 2700K CRI > 90 W 3000K CRI > 90 |
| 25° Lens | 7G4244._ _ | 7G4245._ _ | 4 Nero - Black | 9 4000K 1 5000K |
| 40° Lens | 744244._ _ | 744245._ _ | 8 Oro Satinato Satin Gold | |
| 60° Lens | 754244._ _ | 754245._ _ | | |

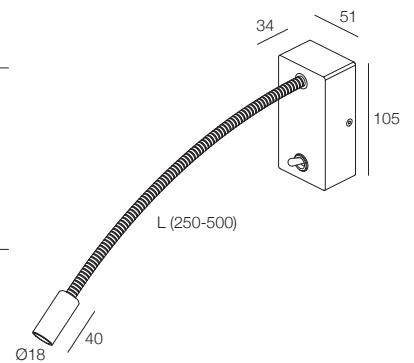

READING LIGHT FLEX P 500

| | 1W 100-240Vac | 2W 100-240Vac | Finiture Finish | Colore LED LED Colour |
|-------------|------------------|------------------|--------------------------------|---|
| Lumen 3000K | 100lm | 150lm | | |
| 10° Lens | 734246._ _ | 734247._ _ | 1 Cromo Lucido Shiny Chrome | U 2200K X 2700K CRI > 90 W 3000K CRI > 90 |
| 25° Lens | 7G4246._ _ | 7G4247._ _ | 4 Nero - Black | 9 4000K 1 5000K |
| 40° Lens | 744246._ _ | 744247._ _ | 8 Oro Satinato Satin Gold | |
| 60° Lens | 754246._ _ | 754247._ _ | | |

EXAMPLE CODE COMPOSITION
123456.

