


CONTINUUM IP67




- IP67
- Class III 24Vdc
- Class II 220-240Vac
- Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting
- WIPS - Water Infiltration Protection System
- Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
- Collegare in parallelo 24Vdc
Connect in parallel at 24Vdc
- Alimentazione integrata, collegare alla tensione di rete 220-240Vac
Built-in driver, connect directly to the line voltage to 220-240Vac
- Altamente riciclabile
Highly recyclable

CONTINUUM IP67


	9W	18W	27W	36W	45W	Finiture Finish	Colore LED LED Colour
	24Vdc	24Vdc	24Vdc	24Vdc	24Vdc		
Lumen Output 3000K 2500 lm/m	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm	L = 150 cm		
10° Lens	734319._.	734320._.	734321._.	734322._.	734323._.	■ 4 Nero - Black	<ul style="list-style-type: none"> U 2200K Y 2700K 6 3000K W 3000K CRI > 90 9 4000K 8 DYNAMIC WHITE
25° Lens	7G4319._.	7G4320._.	7G4321._.	7G4322._.	7G4323._.		
40° Lens	744319._.	744320._.	744321._.	744322._.	744323._.		
60° Lens	754319._.	754320._.	754321._.	754322._.	754323._.		
Lente ellittica Elliptical lens	774319._.	774320._.	774321._.	774322._.	774323._.		

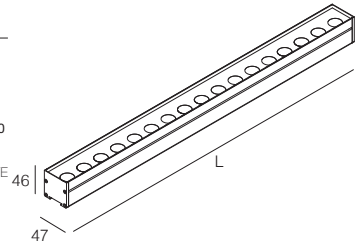

	11W	21W	30W	40W	50W	Finiture Finish	Colore LED LED Colour
	220-240Vac	220-240Vac	220-240Vac	220-240Vac	220-240Vac		
Lumen Output 3000K 2500 lm/m	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm	L = 150 cm		
10° Lens	734309._.	734310._.	734311._.	734312._.	734313._.	■ 4 Nero - Black	<ul style="list-style-type: none"> U 2200K Y 2700K 6 3000K W 3000K CRI > 90 9 4000K
25° Lens	7G4309._.	7G4310._.	7G4311._.	7G4312._.	7G4313._.		
40° Lens	744309._.	744310._.	744311._.	744312._.	744313._.		
60° Lens	754309._.	754310._.	754311._.	754312._.	754313._.		
Lente ellittica Elliptical lens	774309._.	774310._.	774311._.	774312._.	774313._.		

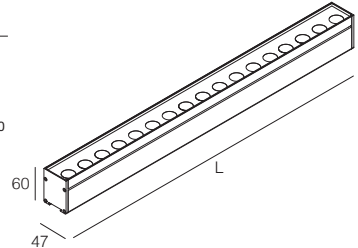

	11W	21W	30W	40W	50W	Finiture Finish	Colore LED LED Colour
	220-240Vac	220-240Vac	220-240Vac	220-240Vac	220-240Vac		
Lumen Output 3000K 2500 lm/m	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm	L = 150 cm		
10° Lens	734314._.	734315._.	734316._.	734317._.	734318._.	■ 4 Nero - Black	<ul style="list-style-type: none"> U 2200K Y 2700K 6 3000K W 3000K CRI > 90 9 4000K
25° Lens	7G4314._.	7G4315._.	7G4316._.	7G4317._.	7G4318._.		
40° Lens	744314._.	744315._.	744316._.	744317._.	744318._.		
60° Lens	754314._.	754315._.	754316._.	754317._.	754318._.		
Lente ellittica Elliptical lens	774314._.	774315._.	774316._.	774317._.	774318._.		

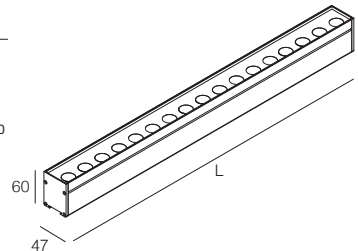

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N
CV100-L-24-NL
DYNAMIC WHITE

ACCESSORI
ACCESSORIES

24Vdc



Micro connettore stagno
Micro watertight connector
A00357.40

220-240Vac


















Connettore stagno
Watertight connector
A01023.40

EXAMPLE CODE COMPOSITION
123456.



CONTINUUM IP67

	CONTINUUM 24Vdc	CONTINUUM 220-240Vac	DESCRIPTION	
ELEMENTI DI FISSAGGIO FIXING ELEMENTS				Staffa fissa Fixed bracket A00949.40
				Placca di fissaggio Fixing plate A00950.40
				Staffa orientabile H30 Adjustable bracket H30 A00951.40
				Staffa orientabile H50 Adjustable bracket H50 A00952.40
				Staffa orientabile H80 Adjustable bracket H80 A00953.40

Staffa fissa
Fixed bracket

Placca di fissaggio
Fixing plate

Staffa orientabile
Adjustable bracket

