









MACRO IP67

















24Vdc

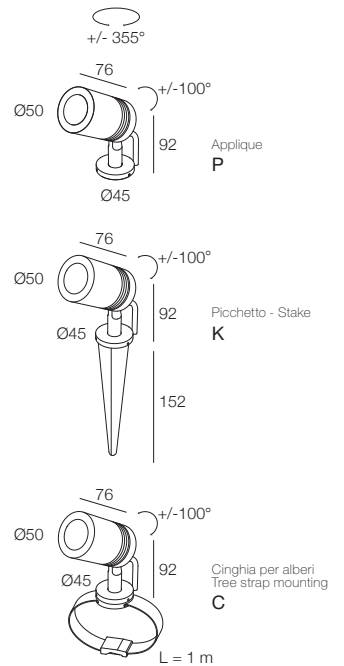
-  IP67
-  Class III
-  Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting
-  WIPS - Water Infiltration Protection System
-  Cavo in neoprene 200 cm
200 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
-  Collegare in parallelo 24Vdc
Connect in parallel at 24Vdc
-  380 gr
-  Altamente riciclabile
Highly recyclable



MACRO IP67

















24Vdc

	3W 24Vdc	6W 24Vdc	9W 24Vdc	Finiture Finish	Colore LED LED Colour	Elementi di fissaggio Fixing element
Lumen Output 3000K	200lm	450lm	600lm			
 3° Lens	7T4124._._.			 3 Grigio - Gray	 Y 2700K	 P Applique - Applique
 10° Lens		734125._._.	734126._._.	 4 Nero - Black	 W 3000K CRI > 90	 K Picchetto - Stake
 30° Lens		764125._._.	764126._._.	 6 Acciaio Inox Stainless Steel AISI 316L	 6 3000K	 C Cinghia per alberi Tree strap mounting
 50° Lens		7D4125._._.	7D4126._._.	 T Titanio - Titanium	 J 3500K	
					 9 4000K	



MACRO IP67

24Vdc - CON NIDO D'APE - WITH HEX LOUVER

	3W 24Vdc	6W 24Vdc	9W 24Vdc	Finiture Finish	Colore LED LED Colour	Elementi di fissaggio Fixing element
Lumen Output 3000K	200lm	450lm	600lm			
 3° Lens	7T4130._._.			 3 Grigio - Gray	 Y 2700K	 P Applique - Applique
 10° Lens		734131._._.	734132._._.	 4 Nero - Black	 W 3000K CRI > 90	 K Picchetto - Stake
 30° Lens		764131._._.	764132._._.	 6 Acciaio Inox Stainless Steel AISI 316L	 6 3000K	 C Cinghia per alberi Tree strap mounting
 50° Lens		7D4131._._.	7D4132._._.	 T Titanio - Titanium	 J 3500K	
					 9 4000K	

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

24Vdc CV20-F-24-N

ACCESSORI
ACCESSORIES



Visiera antiabbagliamento
Low glare visor
A00519._0



Visiera cilindrica antiabbagliamento
Low glare snoot
A00848._0



Connettore stagno
Watertight connector
A00387.40

EXAMPLE CODE COMPOSITION
123456.

