



## MIRUM QR2

-  IP40
-  Class III
-  Incasso a parete, soffitto  
Wall, ceiling recessed
-  Collegare in serie 180mA o 250mA o 350mA  
Connect in series at 180mA or 250mA or 350mA
-  605 gr
-  108x208 mm
-  Altamente riciclabile  
Highly recyclable




### MIRUM QR2

STRUTTURA FRAME		A00561... 0				Nell'ordine richiedere 1 Struttura ogni 2 Moduli Mirum QR Please specify in the purchase order 1 Frame each 2 Mirum QR Modules		Finiture Finish ■ H Nero - Black □ 7 Bianco - White	
MODULO - MODULE MIRUM QR	6W 180mA	8W 250mA	12W 350mA	12W 350mA	Finiture Finish	Colore LED LED Colour			
Lumen Output 3000K	500lm	650lm	900lm	1000lm (at source)					
15° Reflector	7A4294..._	7A4295..._	7A4296..._		■ H Nero - Black □ 7 Bianco - White	■ Y 2700K ■ 6 3000K ■ W 3000K CRI > 90 ■ 9 4000K ■ T 3000K CRI > 90 DIM-TO-WARM			
25° Reflector	7G4294..._	7G4295..._	7G4296..._						
40° Reflector	744294..._	744295..._	744296..._	744297..._ T DIM-TO-WARM					



+  
MIRUM QR  
x2

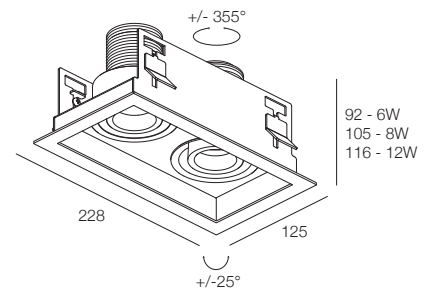

ALIMENTATORI CONSIGLIATI (non inclusi)  
SUGGESTED DRIVERS (not included)

180mA	CC20-F-180-N
250mA	CC9-F-250-N
350mA	CC20-F-350-N
350mA	CC20-A-350-N

ACCESSORI  
ACCESSORIES



Filtro Ellittico Linear Filter A00366.80	Nido D'ape Hex Louver A00367.40	Filtro Prismatico Prismatic Filter A00368.80	Filtro Correttivo Softening Lens A00369.80
--	---------------------------------------	--	--

Only for 15° reflector

EXAMPLE CODE COMPOSITION  
123456.

