

EDEN 12-18




- IP65
- Class III
- Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting H 150 - H 350
- Montaggio a soffitto, pavimento
Ceiling, floor mounting H 700
- WIPS - Water Infiltration Protection System
- Cavo in neoprene 200 cm
200 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
- Collegare in serie 350mA o 500mA
Connect in series at 350mA or 500mA
- 1100 gr (EDEN 12-18 H150)
- 1350 gr (EDEN 12-18 H350)
- 1900 gr (EDEN 12-18 H700)
- Altamente riciclabile
Highly recyclable

QUANTUM CORE REFLECTOR




EDEN 12-18 H150

	12W 350mA	18W 500mA	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	1500lm	2150lm		
10° Reflector	734379._._	734380._._	3 Grigio - Gray 4A Grigio Antracite Anthracite Gray	Y 2700K 6 3000K 9 4000K
20° Reflector	784379._._	784380._._	H Nero - Black	
40° Reflector	744379._._	744380._._	MF Moka - Moka VB Verde Oliva Olive Green	

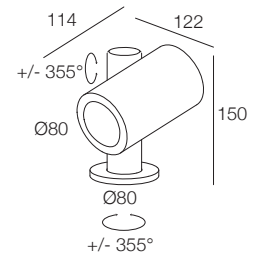


EDEN 12-18 H350

	12W 350mA	18W 500mA	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	1500lm	2150lm		
10° Reflector	734381._._	734382._._	3 Grigio - Gray 4A Grigio Antracite Anthracite Gray	Y 2700K 6 3000K 9 4000K
20° Reflector	784381._._	784382._._	H Nero - Black	
40° Reflector	744381._._	744382._._	MF Moka - Moka VB Verde Oliva Olive Green	

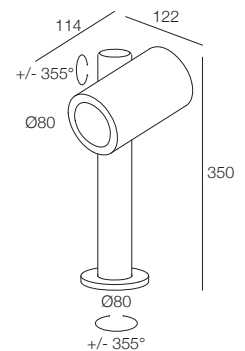

EDEN 12-18 H700

	12W 350mA	18W 500mA	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	1500lm	2150lm		
10° Reflector	734383._._	734384._._	3 Grigio - Gray 4A Grigio Antracite Anthracite Gray	Y 2700K 6 3000K 9 4000K
20° Reflector	784383._._	784384._._	H Nero - Black	
40° Reflector	744383._._	744384._._	MF Moka - Moka VB Verde Oliva Olive Green	

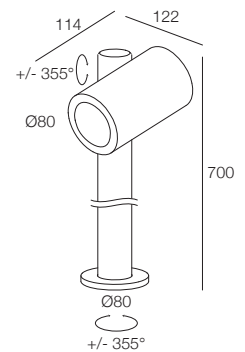

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

350mA CC20-F-350-N
500mA CC20-F-500-N

ACCESSORI
ACCESSORIES



Connettore stagno
Watertight connector
A00387.40



Zanche
Anchor for concrete
A00910.60

EXAMPLE CODE COMPOSITION
123456.

LED COLOUR
FINISH