

LIGHT SOURCE

LED quantity	1
Power max	6 W
Total lumen output (3000K CRI>90)	20° - 364 lm 40° - 387 lm 50° - 342 lm
Efficacy lm/W (3000K CRI>90)	20° - 60 lm/W 40° - 64 lm/W 50° - 57 lm/W
CRI	>80 – >90
LED Temperature	2700K – 3000K – 3000K CRI>90 – 4000K – 5000K
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	20° - 40° - 50°
Beam direction	Adjustable +/-90°, rotating +/-355°
Flux symmetry	Symmetrical

FIXTURE

Material	Aluminum
Available finishes	Hard coat anodized: 3 - Gray 4 - Black T - Titanium Z - Champagne Gold Powder coated: 7 - White
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Ring nut, magnetic, applique

ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
Connection	In series at 500mA
Class	III

MECHANICAL FEATURES

Dimensions (body)	Ø34 x 51 mm
Weight	135 gr
Installation	Wall, ceiling, floor mounting
Cut-out	Ø10 mm (G) - (M) - (P)
Use	Indoor

ACCESSORIES

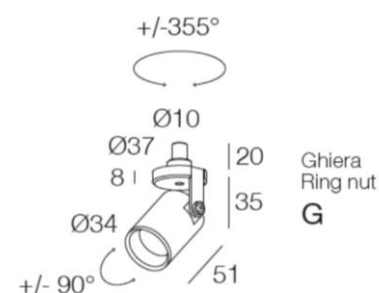
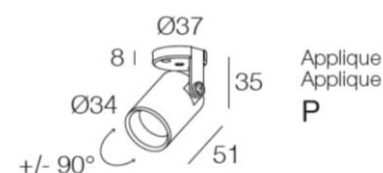
Visors	Low glare snoot (3-10-20mm) within lenses Low glare snoot with hex louvers (3-10-20mm) within lenses
Filters	Upon request
Box/ Frame	-
Fixing system	-



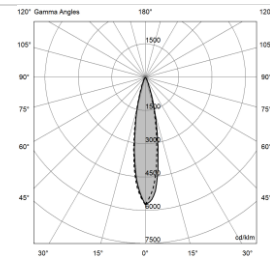
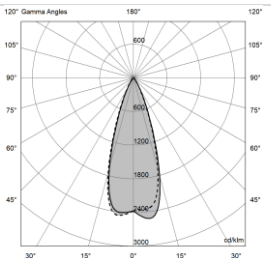
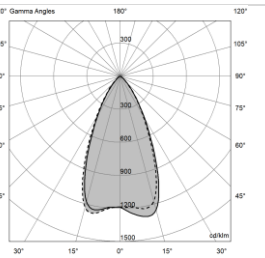
LOW GLARE SNOOT



LOW GLARE SNOOT WITH HEX LOUVER

Ghiera
Ring nut
GMagnetico
Magnetic
MApplique
Applique
P

PHOTOMETRIC DATA

20° Lens				40° Lens				50° Lens			
											
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
20°				40°				50°			
<u>1.00</u>	0.36	2092	1306	<u>1.00</u>	0.64	960	621	<u>1.00</u>	0.94	425	262
<u>2.00</u>	0.72	523	327	<u>2.00</u>	1.28	240	155	<u>2.00</u>	1.88	106	66
<u>3.00</u>	1.08	232	145	<u>3.00</u>	1.93	107	69	<u>3.00</u>	2.82	47	29
<u>4.00</u>	1.44	131	82	<u>4.00</u>	2.57	60	39	<u>4.00</u>	3.76	27	16
<u>5.00</u>	1.80	84	52	<u>5.00</u>	3.21	38	25	<u>5.00</u>	4.70	17	10

NOTES

Interchangeable optics and snoots: low glare snoot H 3 mm included .