

LIGHT SOURCE

LED quantity	28
Power max	4 W
Total lumen output (3000K)	96 lm
Efficacy lm/W (3000K)	23 lm/W
LOR (3000K)	-
CRI	>80 - >90
LED Temperature (K)	2200K, 2500K, 2700K CRI>90, 3000K CRI>90, 3500K CRI>90, 4000K CRI>90
Average operational life	50.000 hours

OPTIC

Material	PC
Available optics	Diffused emission
Beam direction	Fixed
Flux symmetry	Asymmetric
Accessories	-

LED FIXTURE

Material	Aluminum
Finish	Painted (White, Black, Corten, Anthracite Grey, Oyster White)
Available finishes	White, Black, Corten, Anthracite Grey, Oyster White
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	-

ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection	In parallel at 24Vdc
Class	III

MECHANICAL FEATURES



Dimensions (mm)	80 x 140 x 29
Weight	170 gr
Mounting	Wall
Cut-out (mm)	Flush-mounting box 503E (H 74 x W 107 x D 51,3)
Use	Indoor

NOTES

Recessed-box for cement/brickwork included 503E



design by **Valerio Sommella & Anonima Luci**

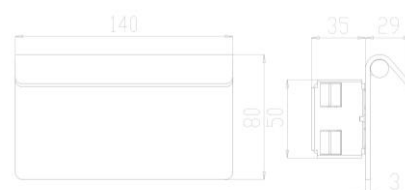

4W