

## LIGHT SOURCE

LED quantity	1-3		
Power max	1 Wx2 – 2 Wx2 – 3 Wx2		
Total lumen output (3000K)	1W: 10° - 115 lm <sub>x2</sub> 30° - 122 lm <sub>x2</sub> 40° - 112 lm <sub>x2</sub> Ell. lens - 112 lm	2W: 10° - 203 lm <sub>x2</sub> 30° - 217 lm <sub>x2</sub> 40° - 199 lm <sub>x2</sub> Ell. lens - 200 lm <sub>x2</sub>	3W: 15° - 326 lm <sub>x2</sub> 30° - 321 lm <sub>x2</sub> 60° - 258 lm <sub>x2</sub> Ell. lens - 300 lm <sub>x2</sub>
Efficacy lm/W (3000K)	1W: 10° - 115 lm/W 30° - 122 lm/W 40° - 112 lm/W Ell. lens- 112 lm/W	2W: 10° - 101 lm/W 30° - 108 lm/W 40° - 99 lm/W Ell. lens-100 lm/W	3W: 15° - 108 lm/W 30° - 107 lm/W 60° - 86 lm/W Ell. lens-100 lm/W
CRI	>80 – >90		
LED Temperature	2200K - 2700K – 2700K CRI>90 - 3000K – 3000K CRI>90 – 3500K - 4000K – 5000K		
Average operational life	50.000 hours		

## OPTIC

Material	PMMA
Available optics	10° - 15° - 30° - 40° - 60° - elliptical lens
Beam direction	Adjustable +/-90°, rotating +/-355°
Flux symmetry	Symmetrical, asymmetrical

## FIXTURE

Material	Aluminum
Available finishes	Powder coated: 7 - White Hard coat anodized: 4 - Black B - Dark bronze
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Track connector, Removal tool

## ELECTRICAL FEATURES


Driver	Remote
Dimmable	DALI
Connection	In parallel at 48Vdc
Class	III

## MECHANICAL FEATURES

Dimensions (single body)	Ø28 x 76 mm
Weight	170 gr
Installation	Track mounting
Cut-out	-
Use	Indoor

## ACCESSORIES

Visors	-
Filters	Upon request
Box/ Frame	-
Fixing system	-

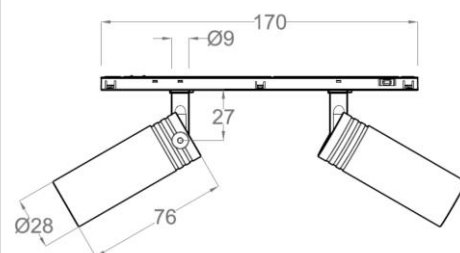

## PHOTOMETRIC DATA


<b>10° Lens – 2W</b> 	<b>30° Lens – 2W</b> 	<b>40° Lens – 2W</b> 	<b>Elliptical Lens – 2W</b> 																																																																																																																
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>10°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.29</td><td>1468</td><td>928</td></tr> <tr> <td><u>2.00</u></td><td>0.59</td><td>367</td><td>232</td></tr> <tr> <td><u>3.00</u></td><td>0.88</td><td>163</td><td>103</td></tr> <tr> <td><u>4.00</u></td><td>1.17</td><td>92</td><td>58</td></tr> <tr> <td><u>5.00</u></td><td>1.47</td><td>59</td><td>37</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>10°</b>				<u>1.00</u>	0.29	1468	928	<u>2.00</u>	0.59	367	232	<u>3.00</u>	0.88	163	103	<u>4.00</u>	1.17	92	58	<u>5.00</u>	1.47	59	37	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>30°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.41</td><td>1059</td><td>677</td></tr> <tr> <td><u>2.00</u></td><td>0.82</td><td>265</td><td>169</td></tr> <tr> <td><u>3.00</u></td><td>1.24</td><td>118</td><td>75</td></tr> <tr> <td><u>4.00</u></td><td>1.65</td><td>66</td><td>42</td></tr> <tr> <td><u>5.00</u></td><td>2.06</td><td>42</td><td>27</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>30°</b>				<u>1.00</u>	0.41	1059	677	<u>2.00</u>	0.82	265	169	<u>3.00</u>	1.24	118	75	<u>4.00</u>	1.65	66	42	<u>5.00</u>	2.06	42	27	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>40°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.78</td><td>361</td><td>217</td></tr> <tr> <td><u>2.00</u></td><td>1.56</td><td>90</td><td>54</td></tr> <tr> <td><u>3.00</u></td><td>2.35</td><td>40</td><td>24</td></tr> <tr> <td><u>4.00</u></td><td>3.13</td><td>23</td><td>14</td></tr> <tr> <td><u>5.00</u></td><td>3.91</td><td>14</td><td>9</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>40°</b>				<u>1.00</u>	0.78	361	217	<u>2.00</u>	1.56	90	54	<u>3.00</u>	2.35	40	24	<u>4.00</u>	3.13	23	14	<u>5.00</u>	3.91	14	9	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>15°X40°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.25</td><td>888</td><td>566</td></tr> <tr> <td><u>2.00</u></td><td>0.50</td><td>222</td><td>141</td></tr> <tr> <td><u>3.00</u></td><td>0.75</td><td>99</td><td>63</td></tr> <tr> <td><u>4.00</u></td><td>1.00</td><td>56</td><td>35</td></tr> <tr> <td><u>5.00</u></td><td>1.25</td><td>36</td><td>23</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>15°X40°</b>				<u>1.00</u>	0.25	888	566	<u>2.00</u>	0.50	222	141	<u>3.00</u>	0.75	99	63	<u>4.00</u>	1.00	56	35	<u>5.00</u>	1.25	36	23
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>10°</b>																																																																																																																			
<u>1.00</u>	0.29	1468	928																																																																																																																
<u>2.00</u>	0.59	367	232																																																																																																																
<u>3.00</u>	0.88	163	103																																																																																																																
<u>4.00</u>	1.17	92	58																																																																																																																
<u>5.00</u>	1.47	59	37																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>30°</b>																																																																																																																			
<u>1.00</u>	0.41	1059	677																																																																																																																
<u>2.00</u>	0.82	265	169																																																																																																																
<u>3.00</u>	1.24	118	75																																																																																																																
<u>4.00</u>	1.65	66	42																																																																																																																
<u>5.00</u>	2.06	42	27																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>40°</b>																																																																																																																			
<u>1.00</u>	0.78	361	217																																																																																																																
<u>2.00</u>	1.56	90	54																																																																																																																
<u>3.00</u>	2.35	40	24																																																																																																																
<u>4.00</u>	3.13	23	14																																																																																																																
<u>5.00</u>	3.91	14	9																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>15°X40°</b>																																																																																																																			
<u>1.00</u>	0.25	888	566																																																																																																																
<u>2.00</u>	0.50	222	141																																																																																																																
<u>3.00</u>	0.75	99	63																																																																																																																
<u>4.00</u>	1.00	56	35																																																																																																																
<u>5.00</u>	1.25	36	23																																																																																																																
<b>UGR= 10</b> <b>15° Lens – 3W</b> 	<b>UGR= 9</b> <b>30° Lens – 3W</b> 	<b>UGR= 21</b> <b>60° Lens – 3W</b> 	<b>UGR= 20</b> <b>Elliptical lens – 3W</b> 																																																																																																																
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>15°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.47</td><td>1177</td><td>746</td></tr> <tr> <td><u>2.00</u></td><td>0.94</td><td>294</td><td>186</td></tr> <tr> <td><u>3.00</u></td><td>1.41</td><td>131</td><td>83</td></tr> <tr> <td><u>4.00</u></td><td>1.88</td><td>74</td><td>47</td></tr> <tr> <td><u>5.00</u></td><td>2.35</td><td>47</td><td>30</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>15°</b>				<u>1.00</u>	0.47	1177	746	<u>2.00</u>	0.94	294	186	<u>3.00</u>	1.41	131	83	<u>4.00</u>	1.88	74	47	<u>5.00</u>	2.35	47	30	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>30°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.55</td><td>913</td><td>572</td></tr> <tr> <td><u>2.00</u></td><td>1.11</td><td>228</td><td>143</td></tr> <tr> <td><u>3.00</u></td><td>1.66</td><td>101</td><td>64</td></tr> <tr> <td><u>4.00</u></td><td>2.21</td><td>57</td><td>36</td></tr> <tr> <td><u>5.00</u></td><td>2.77</td><td>37</td><td>23</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>30°</b>				<u>1.00</u>	0.55	913	572	<u>2.00</u>	1.11	228	143	<u>3.00</u>	1.66	101	64	<u>4.00</u>	2.21	57	36	<u>5.00</u>	2.77	37	23	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>60°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.81</td><td>435</td><td>258</td></tr> <tr> <td><u>2.00</u></td><td>1.61</td><td>109</td><td>65</td></tr> <tr> <td><u>3.00</u></td><td>2.42</td><td>48</td><td>29</td></tr> <tr> <td><u>4.00</u></td><td>3.23</td><td>27</td><td>16</td></tr> <tr> <td><u>5.00</u></td><td>4.04</td><td>17</td><td>10</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>60°</b>				<u>1.00</u>	0.81	435	258	<u>2.00</u>	1.61	109	65	<u>3.00</u>	2.42	48	29	<u>4.00</u>	3.23	27	16	<u>5.00</u>	4.04	17	10	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>25X40°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.48</td><td>722</td><td>442</td></tr> <tr> <td><u>2.00</u></td><td>0.96</td><td>180</td><td>110</td></tr> <tr> <td><u>3.00</u></td><td>1.43</td><td>80</td><td>49</td></tr> <tr> <td><u>4.00</u></td><td>1.91</td><td>45</td><td>28</td></tr> <tr> <td><u>5.00</u></td><td>2.39</td><td>29</td><td>18</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>25X40°</b>				<u>1.00</u>	0.48	722	442	<u>2.00</u>	0.96	180	110	<u>3.00</u>	1.43	80	49	<u>4.00</u>	1.91	45	28	<u>5.00</u>	2.39	29	18
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>15°</b>																																																																																																																			
<u>1.00</u>	0.47	1177	746																																																																																																																
<u>2.00</u>	0.94	294	186																																																																																																																
<u>3.00</u>	1.41	131	83																																																																																																																
<u>4.00</u>	1.88	74	47																																																																																																																
<u>5.00</u>	2.35	47	30																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>30°</b>																																																																																																																			
<u>1.00</u>	0.55	913	572																																																																																																																
<u>2.00</u>	1.11	228	143																																																																																																																
<u>3.00</u>	1.66	101	64																																																																																																																
<u>4.00</u>	2.21	57	36																																																																																																																
<u>5.00</u>	2.77	37	23																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>60°</b>																																																																																																																			
<u>1.00</u>	0.81	435	258																																																																																																																
<u>2.00</u>	1.61	109	65																																																																																																																
<u>3.00</u>	2.42	48	29																																																																																																																
<u>4.00</u>	3.23	27	16																																																																																																																
<u>5.00</u>	4.04	17	10																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>25X40°</b>																																																																																																																			
<u>1.00</u>	0.48	722	442																																																																																																																
<u>2.00</u>	0.96	180	110																																																																																																																
<u>3.00</u>	1.43	80	49																																																																																																																
<u>4.00</u>	1.91	45	28																																																																																																																
<u>5.00</u>	2.39	29	18																																																																																																																
<b>UGR= 14</b>	<b>UGR= 18</b>	<b>UGR= 21</b>	<b>UGR= 14x22</b>																																																																																																																

## NOTES


Compatible with 48Vdc Micro Track:



APPLIQUE MOUNTING



RECESSED MOUNTING



Please consider 1 DALI address for each Tini B 48V.