

## LIGHT SOURCE

LED quantity	1		
Power max	3 W – 6 W – 9 W		
Total lumen output (3000K)	3W: 3° - 256 lm	6W: 10° - 493 lm 30° - 464 lm 50° - 390 lm	9W: 10° - 632 lm 30° - 574 lm 50° - 473 lm
Efficacy lm/W (3000K)	3W: 3° - 85 lm/W	6W: 10° - 82 lm/W 30° - 77 lm/W 50° - 65 lm/W	9W: 10° - 70 lm/W 30° - 64 lm/W 50° - 52 lm/W
CRI	>80 – >90		
LED Temperature	2700K – 3000K – 3000K CRI>90 – 3500K - 4000K		
Average operational life	50.000 hours		

## OPTIC

Material	PMMA
Available optics	3° - 10° - 30° - 50°
Beam direction	Adjustable: Tilting +/-90°, Rotating +/-355°
Flux symmetry	Symmetrical

## FIXTURE

Material	Aluminum
Available finishes	Powder coated: 7 – White H - Black Hard coat anodized: B - Dark bronze
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Track connector, Removing tool

## ELECTRICAL FEATURES



Driver	Remote
Dimmable	DALI
For emergency lighting	Upon request
Connection	In parallel at 48Vdc
Class	III

## MECHANICAL FEATURES





Dimensions (body)	Ø40 x 90 mm
Weight	190 gr
Installation	Track mounting
Cut-out	-
Use	Indoor

## ACCESSORIES

Visors	-
Filters	Upon request
Box/ Frame	-
Fixing system	-

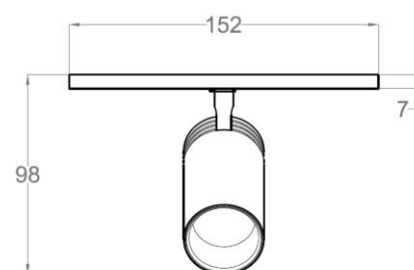


PHOTOMETRIC DATA


3° Lens – 3W	10° Lens – 9W	30° Lens – 9W	50° Lens – 9W																																																																																																																
																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>3°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.08</td><td>8057</td><td>4851</td></tr> <tr> <td><u>2.00</u></td><td>0.16</td><td>2014</td><td>1213</td></tr> <tr> <td><u>3.00</u></td><td>0.24</td><td>895</td><td>539</td></tr> <tr> <td><u>4.00</u></td><td>0.32</td><td>504</td><td>303</td></tr> <tr> <td><u>5.00</u></td><td>0.40</td><td>322</td><td>194</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>3°</b>				<u>1.00</u>	0.08	8057	4851	<u>2.00</u>	0.16	2014	1213	<u>3.00</u>	0.24	895	539	<u>4.00</u>	0.32	504	303	<u>5.00</u>	0.40	322	194	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>10°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.20</td><td>10422</td><td>6390</td></tr> <tr> <td><u>2.00</u></td><td>0.40</td><td>2606</td><td>1598</td></tr> <tr> <td><u>3.00</u></td><td>0.60</td><td>1158</td><td>710</td></tr> <tr> <td><u>4.00</u></td><td>0.80</td><td>651</td><td>399</td></tr> <tr> <td><u>5.00</u></td><td>1.00</td><td>417</td><td>256</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>10°</b>				<u>1.00</u>	0.20	10422	6390	<u>2.00</u>	0.40	2606	1598	<u>3.00</u>	0.60	1158	710	<u>4.00</u>	0.80	651	399	<u>5.00</u>	1.00	417	256	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>30°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.48</td><td>2327</td><td>1466</td></tr> <tr> <td><u>2.00</u></td><td>0.97</td><td>582</td><td>367</td></tr> <tr> <td><u>3.00</u></td><td>1.45</td><td>259</td><td>163</td></tr> <tr> <td><u>4.00</u></td><td>1.93</td><td>145</td><td>92</td></tr> <tr> <td><u>5.00</u></td><td>2.41</td><td>93</td><td>59</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>30°</b>				<u>1.00</u>	0.48	2327	1466	<u>2.00</u>	0.97	582	367	<u>3.00</u>	1.45	259	163	<u>4.00</u>	1.93	145	92	<u>5.00</u>	2.41	93	59	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr> <tr> <td><b>50°</b></td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.77</td><td>984</td><td>603</td></tr> <tr> <td><u>2.00</u></td><td>1.54</td><td>246</td><td>151</td></tr> <tr> <td><u>3.00</u></td><td>2.31</td><td>109</td><td>67</td></tr> <tr> <td><u>4.00</u></td><td>3.08</td><td>61</td><td>38</td></tr> <tr> <td><u>5.00</u></td><td>3.86</td><td>39</td><td>24</td></tr> </table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>50°</b>				<u>1.00</u>	0.77	984	603	<u>2.00</u>	1.54	246	151	<u>3.00</u>	2.31	109	67	<u>4.00</u>	3.08	61	38	<u>5.00</u>	3.86	39	24
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>3°</b>																																																																																																																			
<u>1.00</u>	0.08	8057	4851																																																																																																																
<u>2.00</u>	0.16	2014	1213																																																																																																																
<u>3.00</u>	0.24	895	539																																																																																																																
<u>4.00</u>	0.32	504	303																																																																																																																
<u>5.00</u>	0.40	322	194																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>10°</b>																																																																																																																			
<u>1.00</u>	0.20	10422	6390																																																																																																																
<u>2.00</u>	0.40	2606	1598																																																																																																																
<u>3.00</u>	0.60	1158	710																																																																																																																
<u>4.00</u>	0.80	651	399																																																																																																																
<u>5.00</u>	1.00	417	256																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>30°</b>																																																																																																																			
<u>1.00</u>	0.48	2327	1466																																																																																																																
<u>2.00</u>	0.97	582	367																																																																																																																
<u>3.00</u>	1.45	259	163																																																																																																																
<u>4.00</u>	1.93	145	92																																																																																																																
<u>5.00</u>	2.41	93	59																																																																																																																
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																																																
<b>50°</b>																																																																																																																			
<u>1.00</u>	0.77	984	603																																																																																																																
<u>2.00</u>	1.54	246	151																																																																																																																
<u>3.00</u>	2.31	109	67																																																																																																																
<u>4.00</u>	3.08	61	38																																																																																																																
<u>5.00</u>	3.86	39	24																																																																																																																
UGR=6	UGR=12	UGR=13	UGR=14																																																																																																																

NOTES

Compatible with 48Vdc Micro Track:



APPLIQUE MOUNTING



RECESSED MOUNTING

Please consider 1 DALI address for each Tono B 48V.