

# AURORA 1500 DALI

## LIGHT SOURCE

LED quantity	1
Power max	21 W
Total lumen output (3000K CRI>90)	15° - 1393 lm 25° - 1578 lm 40° - 1275 lm
Efficacy lm/W (3000K CRI>90)	15° - 66 lm/W 25° - 75 lm/W 40° - 61 lm/W
LED Temperature	2700K- 3000K - 3000K CRI>90 – 4000K 3000K CRI>90 DIM TO WARM
Average operational life	50.000 hours

## OPTIC

Material	Metalized plastic reflector
Available optics	15° - 25° - 40°
Beam direction	Adjustable +/-90°, rotating +/-355°
Flux symmetry	Symmetrical

## FIXTURE

Material	Aluminum
Available finishes	Powder coating: 7 - White H - Black W - All white
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Applique base for inner connections

## ELECTRICAL FEATURES



Driver	Built-in driver, provided with Eurostandard track connector
Dimmable	DALI
Connection	In parallel at 220-240 Vac
Class	II

## MECHANICAL FEATURES




Dimensions (body)	Ø55 x 140 mm
Weight	610 gr
Installation	Wall, ceiling mounting track
Cut-out	-
Use	Indoor

## ACCESSORIES

Visors	Hex louver (A00732.40)
Filters	-
Box/ Frame	-
Fixing system	-

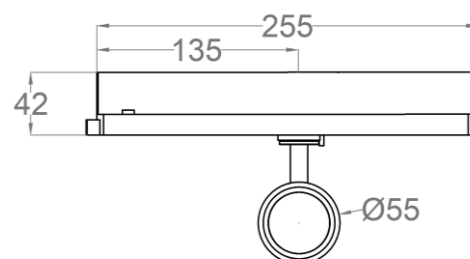

PHOTOMETRIC DATA


15° Lens – 21W	25° Lens – 21W	40° Lens – 21W																																																																																					
																																																																																							
<table><tr><th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr><tr><td><b>15°</b></td><td></td><td></td><td></td></tr><tr><td><u>1.00</u></td><td>0.34</td><td>8551</td><td>5331</td></tr><tr><td><u>2.00</u></td><td>0.67</td><td>2138</td><td>1333</td></tr><tr><td><u>3.00</u></td><td>1.01</td><td>950</td><td>592</td></tr><tr><td><u>4.00</u></td><td>1.35</td><td>534</td><td>333</td></tr><tr><td><u>5.00</u></td><td>1.69</td><td>342</td><td>213</td></tr></table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>15°</b>				<u>1.00</u>	0.34	8551	5331	<u>2.00</u>	0.67	2138	1333	<u>3.00</u>	1.01	950	592	<u>4.00</u>	1.35	534	333	<u>5.00</u>	1.69	342	213	<table><tr><th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr><tr><td><b>25°</b></td><td></td><td></td><td></td></tr><tr><td><u>1.00</u></td><td>0.44</td><td>7370</td><td>4610</td></tr><tr><td><u>2.00</u></td><td>0.87</td><td>1843</td><td>1152</td></tr><tr><td><u>3.00</u></td><td>1.31</td><td>819</td><td>512</td></tr><tr><td><u>4.00</u></td><td>1.75</td><td>461</td><td>288</td></tr><tr><td><u>5.00</u></td><td>2.19</td><td>295</td><td>184</td></tr></table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>25°</b>				<u>1.00</u>	0.44	7370	4610	<u>2.00</u>	0.87	1843	1152	<u>3.00</u>	1.31	819	512	<u>4.00</u>	1.75	461	288	<u>5.00</u>	2.19	295	184	<table><tr><th>H(m)</th><th>D(m)</th><th>E<sub>max</sub>(lx)</th><th>E<sub>av</sub>(lx)</th></tr><tr><td><b>40°</b></td><td></td><td></td><td></td></tr><tr><td><u>1.00</u></td><td>0.63</td><td>3768</td><td>2281</td></tr><tr><td><u>2.00</u></td><td>1.27</td><td>942</td><td>570</td></tr><tr><td><u>3.00</u></td><td>1.90</td><td>419</td><td>253</td></tr><tr><td><u>4.00</u></td><td>2.53</td><td>236</td><td>143</td></tr><tr><td><u>5.00</u></td><td>3.17</td><td>151</td><td>91</td></tr></table>	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	<b>40°</b>				<u>1.00</u>	0.63	3768	2281	<u>2.00</u>	1.27	942	570	<u>3.00</u>	1.90	419	253	<u>4.00</u>	2.53	236	143	<u>5.00</u>	3.17	151	91	
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																				
<b>15°</b>																																																																																							
<u>1.00</u>	0.34	8551	5331																																																																																				
<u>2.00</u>	0.67	2138	1333																																																																																				
<u>3.00</u>	1.01	950	592																																																																																				
<u>4.00</u>	1.35	534	333																																																																																				
<u>5.00</u>	1.69	342	213																																																																																				
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																				
<b>25°</b>																																																																																							
<u>1.00</u>	0.44	7370	4610																																																																																				
<u>2.00</u>	0.87	1843	1152																																																																																				
<u>3.00</u>	1.31	819	512																																																																																				
<u>4.00</u>	1.75	461	288																																																																																				
<u>5.00</u>	2.19	295	184																																																																																				
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)																																																																																				
<b>40°</b>																																																																																							
<u>1.00</u>	0.63	3768	2281																																																																																				
<u>2.00</u>	1.27	942	570																																																																																				
<u>3.00</u>	1.90	419	253																																																																																				
<u>4.00</u>	2.53	236	143																																																																																				
<u>5.00</u>	3.17	151	91																																																																																				
UGR=9	UGR=7	UGR=10																																																																																					

NOTES

Compatible with Euro-standard 220-240 Vac Track, DALI version:



APPLIQUE MOUNTING



RECESSED MOUNTING

